

Marble Look

GLAZED PORCELAIN




BEST  TILE® / BESTTILE.COM


Lustre



CALACATTA BLANCO

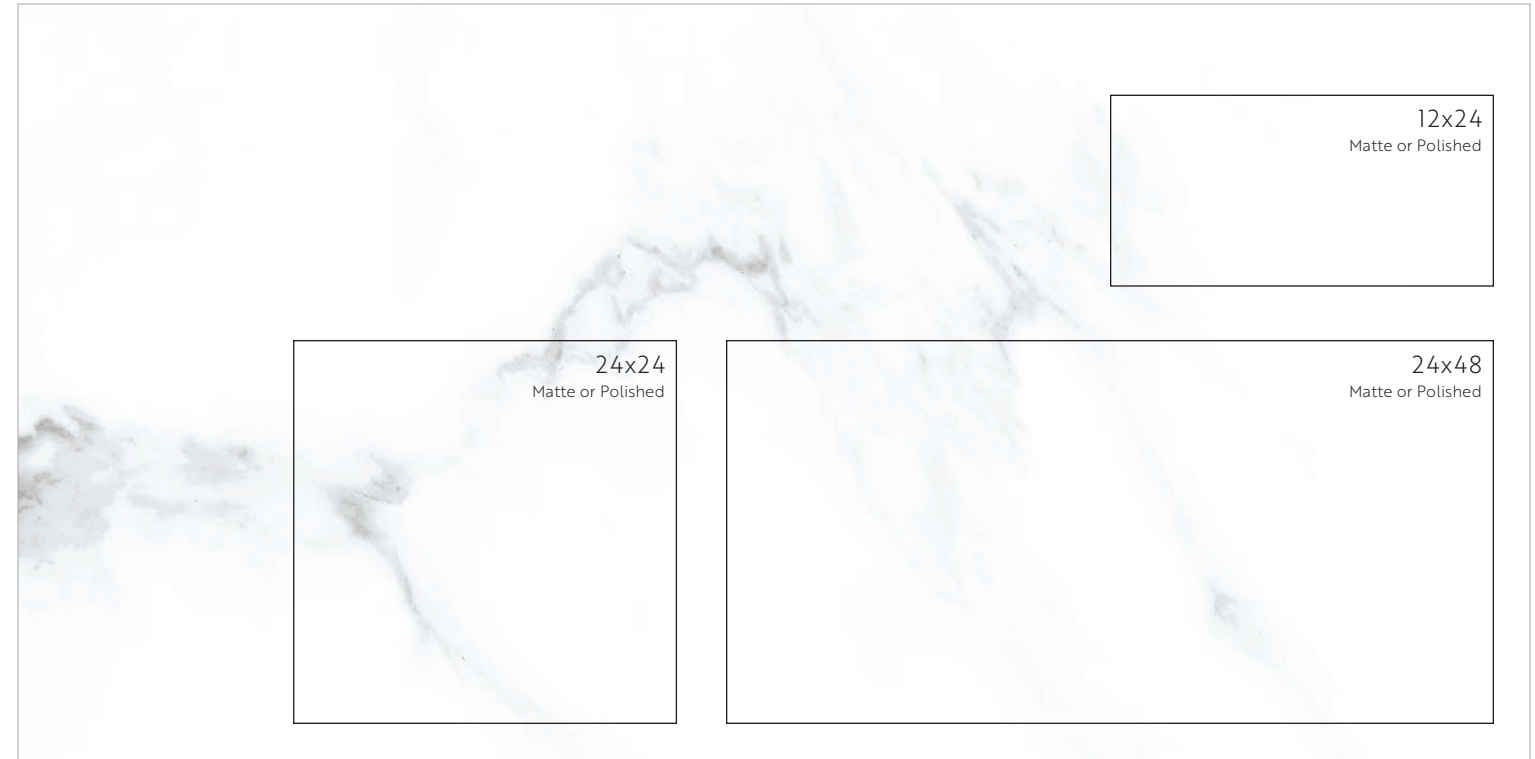

DECORS



3x3 Mosaic
on 12x12 Sheet
Polished


VARIATION



CREPUSCOLO CREAM



DECORS



3x3 Mosaic
on 12x12 Sheet
Polished

VARIATION



BEST  **TILE**®

Wall // LUSTRE CREPUSCOLO CREAM 12X24
Floor // LUSTRE CREPUSCOLO CREAM 24X24
Shower // LUSTRE CREPUSCOLO CREAM 3X3 MOSAIC

CREPUSCOLO PEARL



DECORS



3x3 Mosaic
on 12x12 Sheet
Polished

VARIATION



Marble Look

GLAZED PORCELAIN

Lustre



COLORS, SIZES & AVAILABILITY

NOMINAL SIZE	FINISH	THICKNESS	GROUT JOINT	CALACATTA BLANCO	CREPUSCOLO CREAM	CREPUSCOLO PEARL
12 x 24 Rectified	Matte	9.5 mm	1/8"	✓		
12 x 24 Rectified	Polished	9.5 mm	1/8"	✓	✓	✓
24 x 24 Rectified	Matte	9.5 mm	1/8"	✓		
24 x 24 Rectified	Polished	9.5 mm	1/8"	✓	✓	✓
24 x 48 Rectified	Matte	9.5 mm	1/8"	✓		
24 x 48 Rectified	Polished	9.5 mm	1/8"	✓	⊘	⊘
48 x 48 Rectified	Polished	9.5 mm	1/8"	⊘	⊘	⊘
30 x 30 Rectified	Polished	9.5 mm	1/8"	⊘	⊘	⊘
18 x 36 Rectified	Polished	9.5 mm	1/8"	⊘	⊘	⊘
36 x 36 Rectified	Polished	9.5 mm	1/8"	⊘	⊘	⊘
36 x 72 Rectified	Polished	9.5 mm	1/8"	⊘	⊘	⊘
3 x 3 Mosaic	Polished	9.5 mm	N/A	✓	✓	✓

✓ Stock Item. ⊘ Non-Stock Item. Requires Extra Lead Time.

TECH INFO

R = Residential, LC = Light Commercial, C = Commercial

ORIGIN: Spain SHADE VARIATION: V3 - Moderate Variation WEAR RATING: Class 4 - Rated for all residential and light commercial applications It is not recommended to stagger any tile longer than 15" more than 1/3 the length of the tile.	RECOMMENDED APPLICATIONS	R	LC	C
	FLOORS	●	●	
	WALLS / BACKSPLASH	●	●	●
	POOL DECKING			
	EXTERNAL USE - FROST PROOF			

● Approved for this application. * Discuss proper installation method with your Sales Representative.

TILE PERFORMANCE DATA

TECHNICAL FEATURE	NORMS	RESULTS
Water Absorption	ISO 10545-3	≤ 0.5 %
Abrasion Resistance (Glazed)	ISO 10545-7	4
Breaking Strength	ISO 10545-4	≥ 35 N/mm ²
Dynamic Coefficient of Friction Wet	AcuTest	≥ 0.42 (Matte); 0.26 (Polished)
Dimensions Range	ISO 10545-2	Conforms
Frost Resistance	ISO 10545-12	Frost Proof
Chemical Resistance - Household Chemicals	ISO 10545-13	Class A
Chemical Resistance - Low Concentration of Acids and Bases	ISO 10545-13	Conforms
Thermal Shock Resistance	ISO 10545-9	Resists
Resistance to Stains	ISO 10545-14	Class 5
Crazing Resistance of Glazed Tiles	ISO 10545-11	Resists

Always inspect materials prior to installation. Always mix 2-3 cartons at a time while installing to insure the best blend. All product images are representative only. Variation in color and shading is to be expected. Final selection should be made from actual tile samples.



VIEW WEBPAGE

LUSTRE CALACATTA BLANCO 12X24 & 3X3 MOSAIC

Floor // LUSTRE CALACATTA BLANCO 24X

BEST  **TILE**®

BESTTILE.COM

MARYLAND | MASSACHUSETTS | NEW JERSEY | NEW YORK | NORTH CAROLINA | PENNSYLVANIA | RHODE ISLAND | VERMONT | VIRGINIA