




# Marble Look


GLAZED PORCELAIN

**BEST**  **TILE**® / [BESTTILE.COM](https://besttile.com)  
**Estate**

# BLU

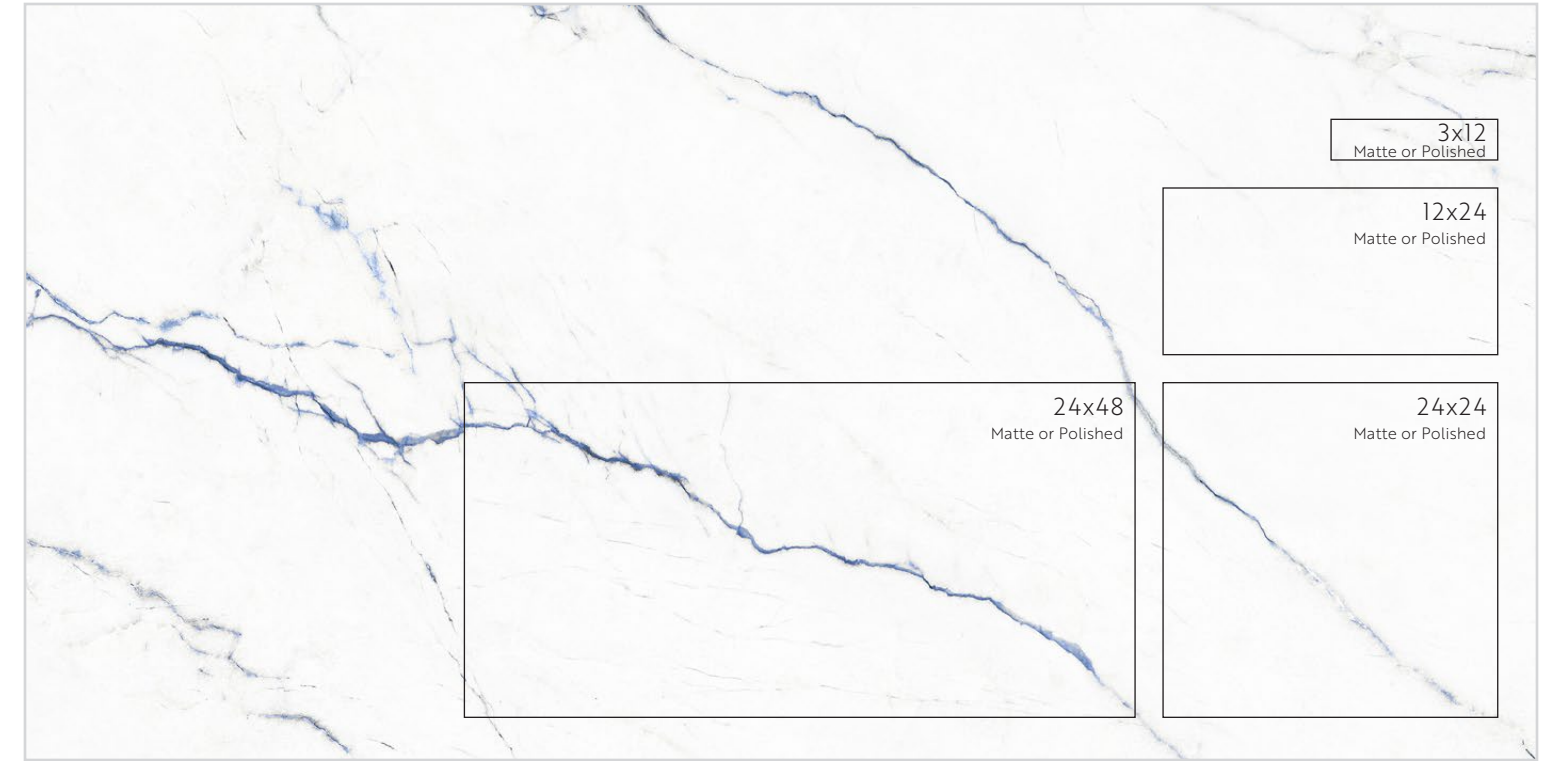

## DECORS



2x2 Mosaic  
on 12x12 Sheet  
Matte


## VARIATION



# CARAMEL




## DECORS



2x2 Mosaic  
on 12x12 Sheet  
Matte


## VARIATION

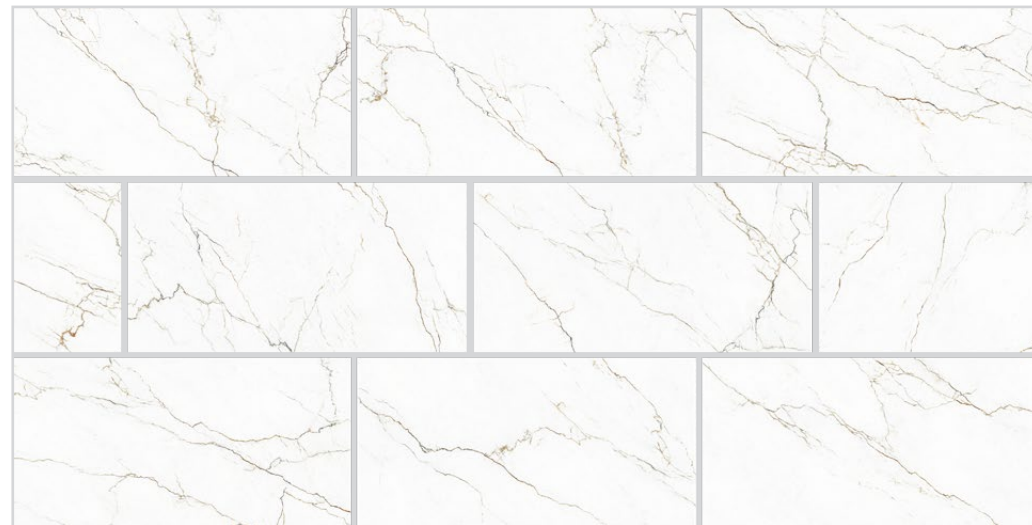


Floor // ESTATE CARAMEL 24X48  
Fireplace // ESTATE CARAMEL 12X24



# VERDE

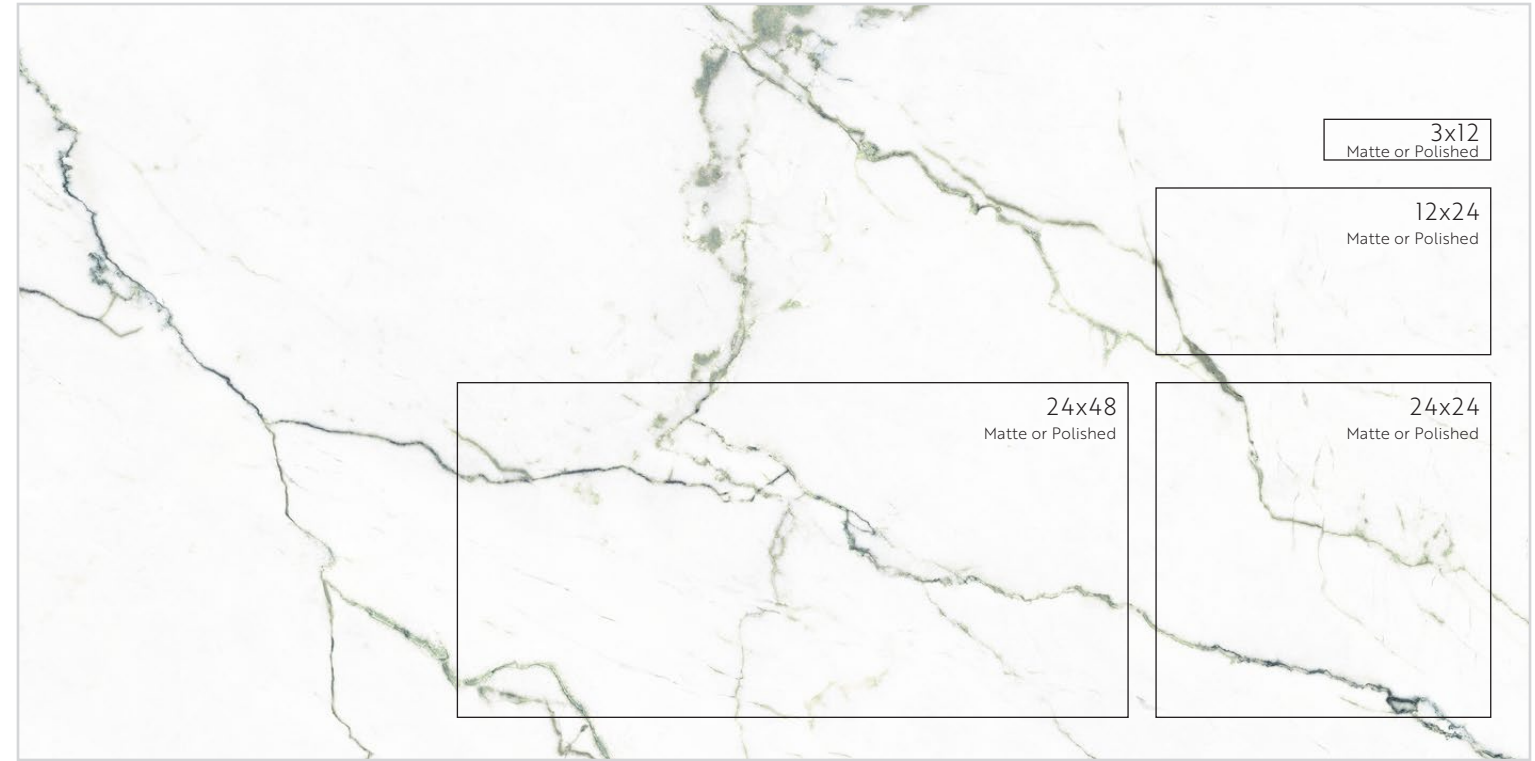

## DECORS



2x2 Mosaic  
on 12x12 Sheet  
Matte

## VARIATION



# Marble Look

GLAZED PORCELAIN

# Estate



## COLORS, SIZES & AVAILABILITY

NOMINAL SIZE	FINISH	THICKNESS	GROUT JOINT	BLU	CARAMEL	VERDE
12 x 24 Rectified	Matte	10 mm	1/8"	✓	✓	✓
12 x 24 Rectified	Polished	10 mm	1/8"	✓	✓	✓
24 x 48 Rectified	Matte	10 mm	1/8"	✓	✓	✓
24 x 48 Rectified	Polished	10 mm	1/8"	✓	✓	✓
3 x 12 Rectified	Matte	10 mm	1/8"	⊘	⊘	⊘
3 x 12 Rectified	Polished	10 mm	1/8"	⊘	⊘	⊘
24 x 24 Rectified	Matte	10 mm	1/8"	⊘	⊘	⊘
24 x 24 Rectified	Polished	10 mm	1/8"	⊘	⊘	⊘
2 x 2 Mosaic	Matte	10 mm	1/8"	✓	✓	✓

✓ Stock Item. ⊘ Non-Stock Item. Requires Extra Lead Time.

## TECH INFO

R = Residential, LC = Light Commercial, C = Commercial

<b>ORIGIN:</b> Italy <b>SHADE VARIATION:</b> V2 - Slight Variation <b>WEAR RATING:</b> Class 5 - Rated for all residential and commercial applications It is not recommended to stagger any tile longer than 15" more than 1/3 the length of the tile. Contains 20% Pre-Consumer Recycled Content.	RECOMMENDED APPLICATIONS	R	LC	C
	FLOORS	●	●	●
	WALLS / BACKSPLASH	●	●	●
	POOL DECKING			
	EXTERNAL USE - FROST PROOF	*	*	

● Approved for this application. \* Discuss proper installation method with your Sales Representative.

## TILE PERFORMANCE DATA

TECHNICAL FEATURE	NORMS	RESULTS
Water Absorption	ISO 10545-3	≤ 0.2 %
Abrasion Resistance (Glazed)	ISO 10545-7	5
Breaking Strength	ISO 10545-4	≥ 35 N/mm2
Dynamic Coefficient of Friction Wet	AcuTest	≥ 0.50 (Matte)
Dimensions Range	ISO 10545-2	Conforms
Frost Resistance	ISO 10545-12	Frost Proof
Chemical Resistance - Household Chemicals	ISO 10545-13	GA: GLA
Chemical Resistance - Low Concentration of Acids and Bases	ISO 10545-13	GA: GLA
Thermal Shock Resistance	ISO 10545-9	Resistant
Resistance to Stains	ISO 10545-14	Class 5
Crazing Resistance of Glazed Tiles	ISO 10545-11	Resistant



VIEW WEBPAGE

Floor // ESTATE VERDE 24X48 POLISHED WITH 2X2 POLISHED MOSAICS

**BEST  TILE<sup>®</sup>**  
BESTTILE.COM

MARYLAND | MASSACHUSETTS | NEW HAMPSHIRE | NEW JERSEY | NEW YORK | NORTH CAROLINA | PENNSYLVANIA | RHODE ISLAND | VERMONT | VIRGINIA