



Travertine Look

GLAZED PORCELAIN

BEST  **TILE**® / BESTTILE.COM

Terra



DOR




DECORS



2x2 Mosaic
on 12x12 Sheet
Matte

VARIATION

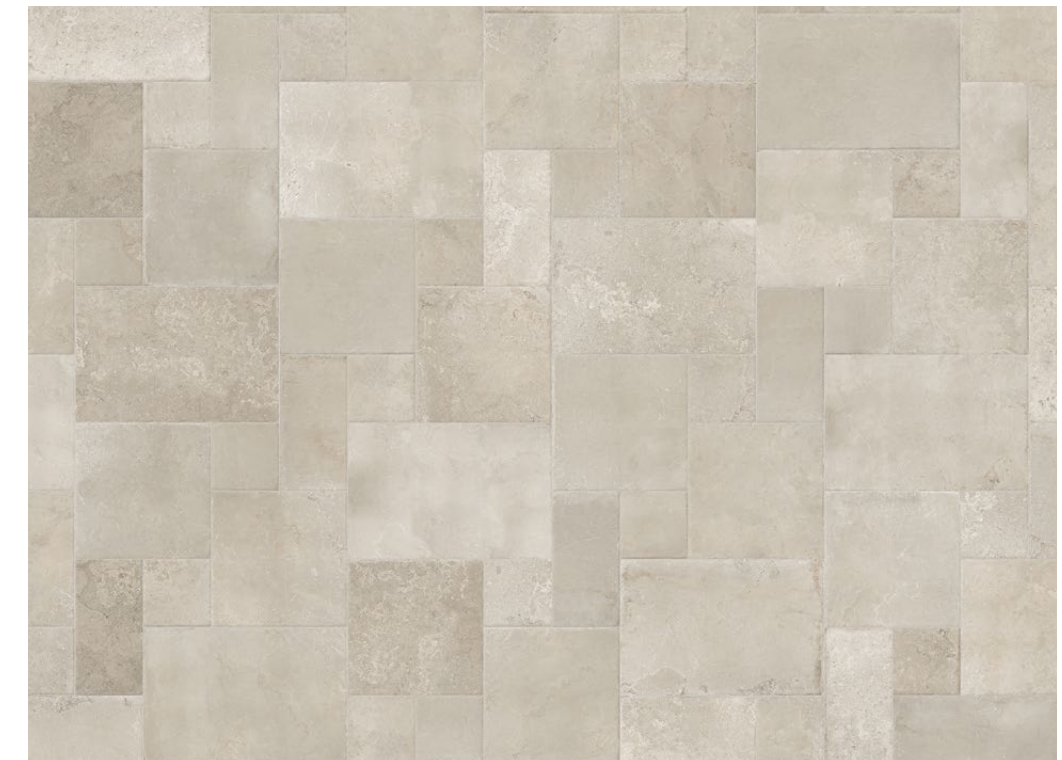

ERICE



BYBLOS



DECORS




2x2 Mosaic
on 12x12 Sheet
Matte

VARIATION



DECORS



2x2 Mosaic
on 12x12 Sheet
Matte

VARIATION



MENFI



BEST  **TILE**®



DECORS



2x2 Mosaic
on 12x12 Sheet
Matte

VARIATION





COLORS, SIZES & AVAILABILITY

NOMINAL SIZE	FINISH	THICKNESS	GROUT JOINT	DOR	ERICE	BYBLOS	MENFI
8 x 8 Rectified	Matte	10 mm	1/8" *	✓	✓	✓	✓
8 x 16 Rectified	Matte	10 mm	1/8" *	✓	✓	✓	✓
16 x 16 Rectified	Matte	10 mm	1/8" *	✓	✓	✓	✓
16 x 24 Rectified	Matte	10 mm	1/8" *	✓	✓	✓	✓
2 x 2 Mosaic	Matte	10 mm	N/A	✓	✓	✓	✓
3 x 24 Bullnose	Matte	10 mm	1/8"	✓	✓	✓	✓

*Grout joints in modular pattern may need to be larger.

✓ Stock Item. ⚪ Non-Stock Item. Requires Extra Lead Time.

TECH INFO

ORIGIN: Italy
SHADE VARIATION: V4 - Substantial Variation
WEAR RATING: Dor: Class 5 - Rated for all residential and commercial applications; All other colors: Class 4 - Rated for all residential and light commercial applications
 It is not recommended to stagger any tile longer than 15" more than 1/3 the length of the tile.
 Contains 20% Pre-Consumer Recycled Content.

RECOMMENDED APPLICATIONS	R	LC	C
FLOORS	●	●	+
WALLS / BACKSPLASH	●	●	●
POOL DECKING			
EXTERNAL USE - FROST PROOF	*	*	*

R = Residential, LC = Light Commercial, C = Commercial

● Approved for this application. + Lazio approved for this application. * Discuss proper installation method with your Sales Representative.

TILE PERFORMANCE DATA

TECHNICAL FEATURE	NORMS	RESULTS
Water Absorption	ISO 10545-3	≤ 0.2 %
Abrasion Resistance (Glazed)	ISO 10545-7	5 - Dor; 4 - All Others
Breaking Strength	ISO 10545-4	≥ 35 N/mm2
Dynamic Coefficient of Friction Wet	AcuTest	≥ 0.60
Dimensions Range	ISO 10545-2	Conforms
Frost Resistance	ISO 10545-12	Frost Proof
Chemical Resistance - Household Chemicals	ISO 10545-13	GA/GLA/GHA
Chemical Resistance - Low Concentration of Acids and Bases	ISO 10545-13	GA/GLA/GHA
Thermal Shock Resistance	ISO 10545-9	Resistant
Resistance to Stains	ISO 10545-14	Class 5
Crazing Resistance of Glazed Tiles	ISO 10545-11	Resistant

Always inspect materials prior to installation. Always mix 2-3 cartons at a time while installing to ensure the best blend. All product images are representative only. Variation in color and shading is to be expected. Final selection should be made from actual tile samples.



VIEW WEBPAGE

Floor // TERRA BYBLOS 8X8, 8X16, 16X16, 16X24

BEST  **TILE**®
BESTTILE.COM

MARYLAND | MASSACHUSETTS | NEW HAMPSHIRE | NEW JERSEY | NEW YORK | NORTH CAROLINA | PENNSYLVANIA | RHODE ISLAND | VERMONT | VIRGINIA