


Angora | Glazed Porcelain




AVAILABLE SIZES

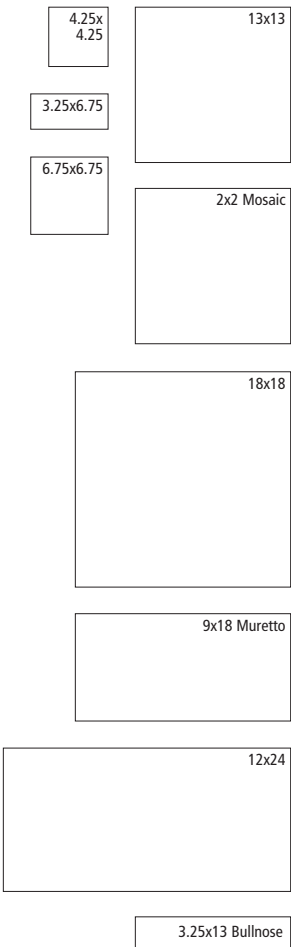

DESCRIPTION



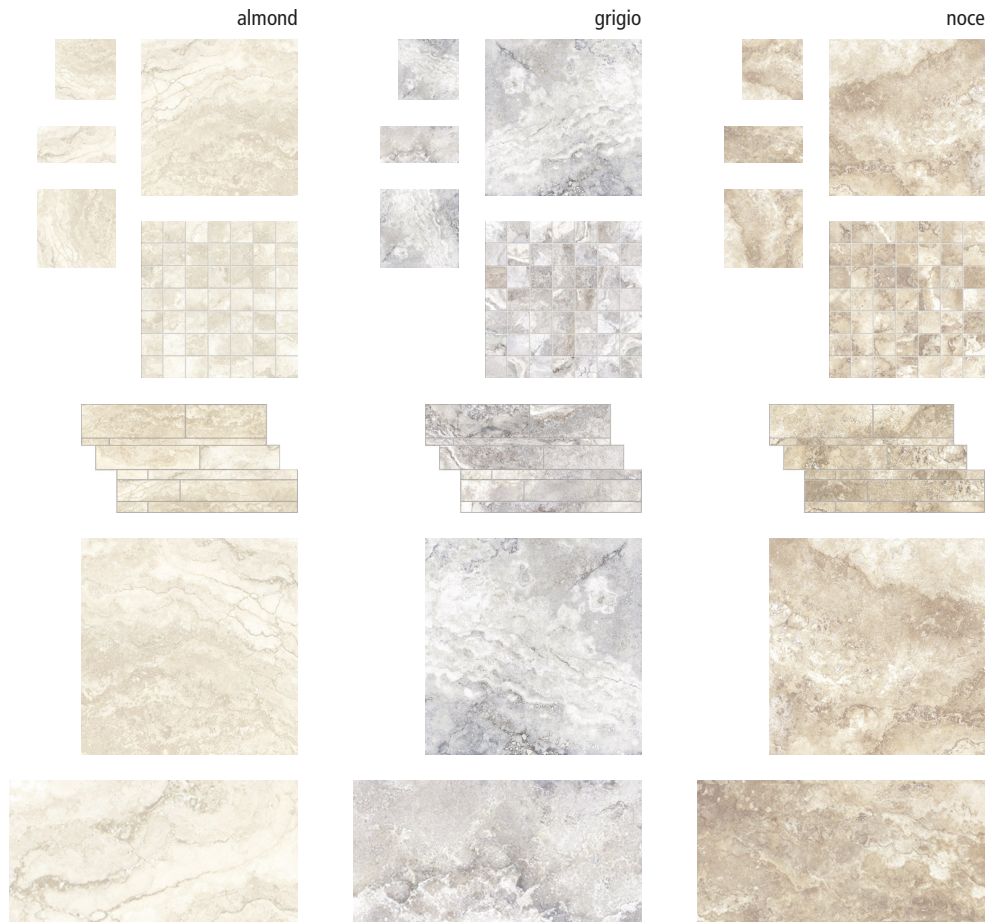





Angora is a stunning glazed porcelain series from Italy that looks like cross-cut travertine. Made with the new high definition, inkjet technology, Angora portrays the look of natural stone in light beige, grey and walnut colors. Multiple shapes and sizes make this great for both walls and floors!

COLORS




TECHNICAL INFORMATION

TILE SIZES

Nominal	Shape	Finish	Thickness
4.25 x 4.25		Matte	8 mm
3.25 x 6.75		Matte	8 mm
6.75 x 6.75		Matte	8 mm
13 x 13		Matte	8 mm
2x2 Mosaic		Matte	8 mm
9 x 18 Muretto Mosaic		Matte	8 mm
18 x 18		Matte	9 mm
12 x 24		Matte	9.5 mm

COORDINATING TRIM

Nominal	Shape	Finish	Thickness
3.25 x 13 Bullnose		Matte	8 mm

PERFORMANCE DATA

CHARACTERISTIC	NORMS	RESULTS
Water Absorption	ISO 10545-3	≤ 0.1 %
PEI Abrasion Resistance (Glazed)	ISO 10545-7	4 / 5
Breaking Strength	ISO 10545-4	56 N/mm ²
Static Coefficient of Friction Wet	C1028	0.61
Dimensions Range	ISO 10545-2	Conforms
Frost Resistance	ISO 10545-12	Frost Proof
Chemical Resistance - Household Chemicals	ISO 10545-13	Resists
Chemical Resistance - Low Concentration of Acids and Bases	ISO 10545-13	Resists
Scratch Hardness	MOHS	7 to 8
Linear Thermal Expansion	ISO 10545-8	7 mk ²
Thermal Shock Resistance	ISO 10545-9	Conforms
Resistance to Stains	ISO 10545-14	Class 5

SHADE VARIATION



V3 - MODERATE VARIATION

While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece may vary significantly. For example "that little bit of color" on one piece of tile may be the primary color on the next piece.

WEAR CODE

Grigio & Noce: 4 - Rated for all residential and light commercial applications.

Almond: 5 - Rated for all residential and commercial applications.

APPLICATIONS

	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL
FLOORS	×	×	Almond
WALLS / BACKSPLASH	×	×	×
POOL DECKING	*	*	
EXTERNAL USE - FROST PROOF	×	*	

× - Has been approved for this application.

* - Information is available upon request.

NOTES

It is not recommended to stagger any tile longer than 18" more than 1/3 the length of the tile.

Always inspect materials prior to installation.

Always mix 2-3 cartons at a time while installing to insure the best blend.