



Calisto | Glazed Porcelain

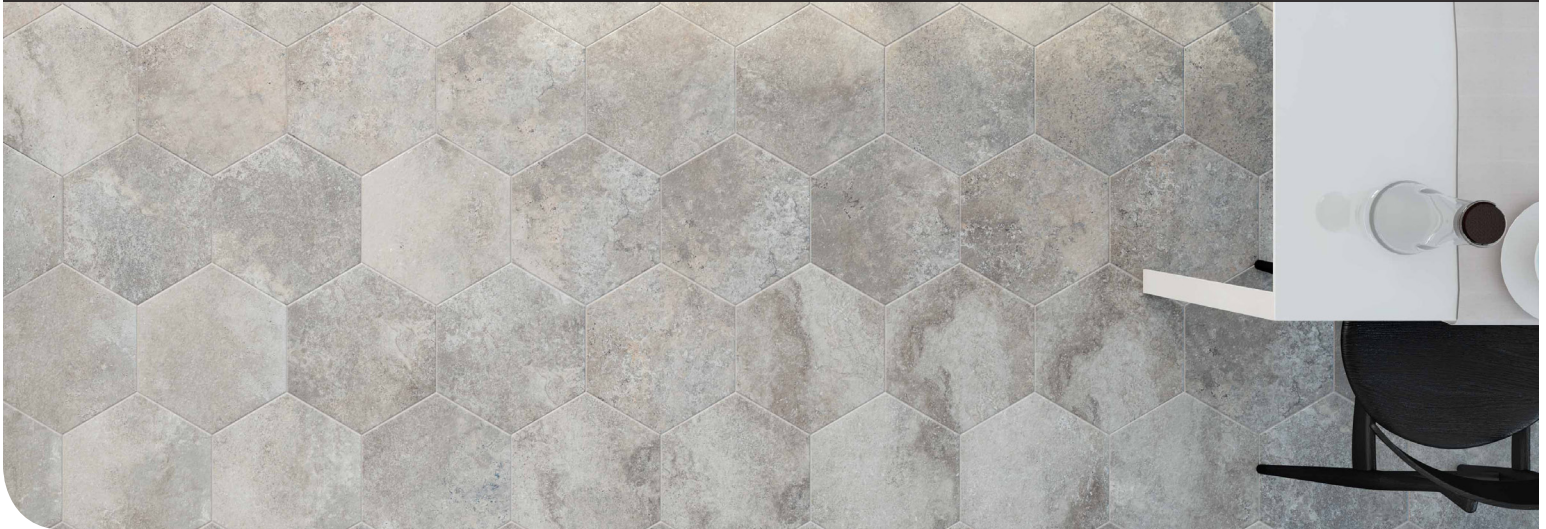


AVAILABLE SIZES

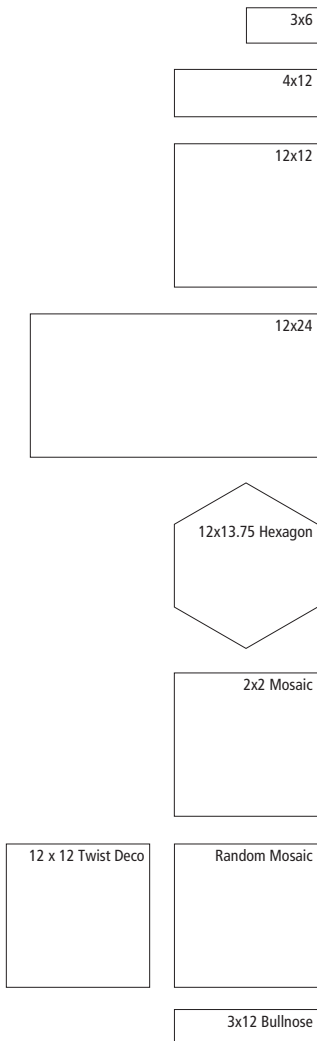

DESCRIPTION








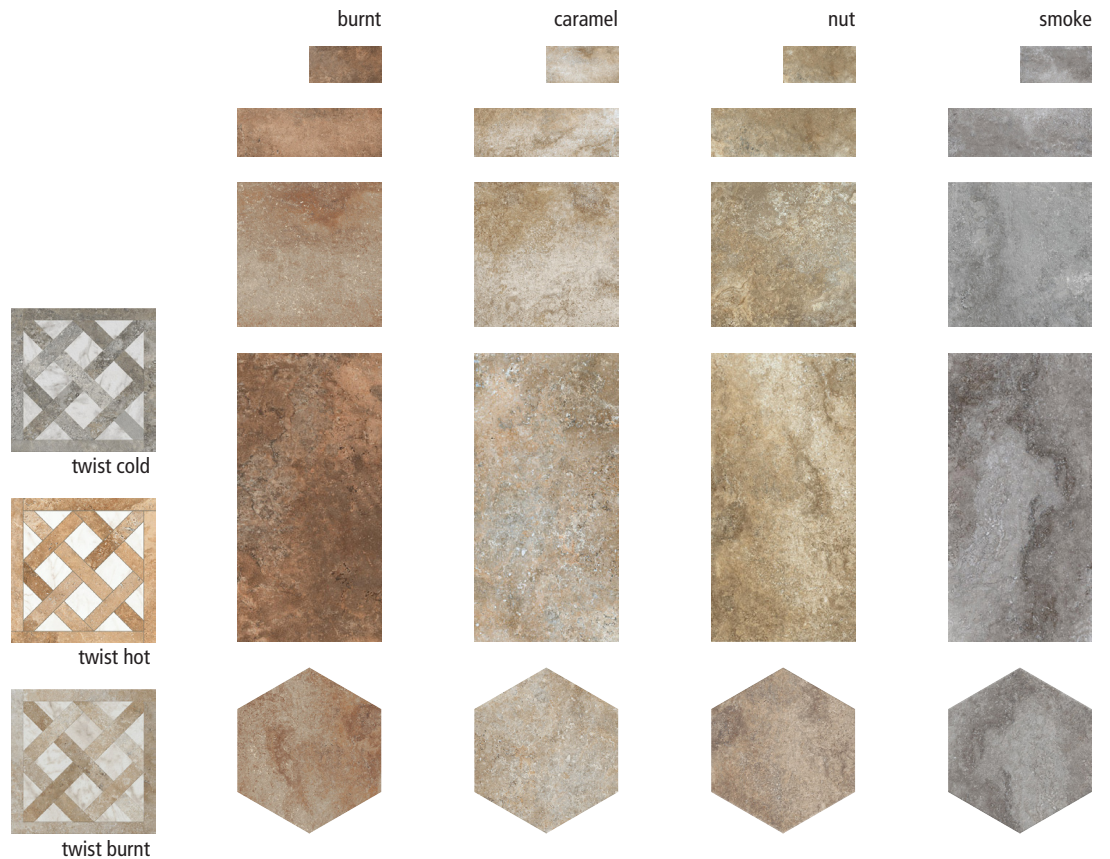
Calisto is a high-quality Italian porcelain collection that modernizes the look of crosscut travertines. A traditional screen that is updated through digital ink-jet technology, this line offers a broad palette of color and tone to any tile project. Calisto is available in four beautiful colors and multiple format options suitable for floors, walls, backsplashes and showers. Choose from 12" x 12", 12" x 24", 12" x 14" hexagon, mosaic, and trim, along with a unique 12" x 12" Twist Deco that replicates inlaid marble.

COLORS




TECHNICAL INFORMATION

TILE SIZES

Nominal	Shape	Finish	Thickness
3 x 6		Matte	8 mm
4 x 12		Matte	8 mm
12 x 12		Matte	8 mm
12 x 24		Matte	9 mm
12 x 13.75 Hexagon		Matte	8 mm
2 x 2 Mosaic		Matte	8 mm
Random Mosaic		Matte	8 mm
12 x 12 Twist Deco		Matte	8 mm

COORDINATING TRIM

Nominal	Shape	Finish	Thickness
3 x 12 Bullnose		Matte	8 mm

PERFORMANCE DATA

CHARACTERISTIC	NORMS	RESULTS
Water Absorption	ISO 10545-3	0.09
PEI Abrasion Resistance (Glazed)	ISO 10545-7	4
Breaking Strength	ISO 10545-4	45.7 N/mm ²
Dynamic Coefficient of Friction Wet	AcuTest	0.43
Dimensions Range	ISO 10545-2	Conforms
Frost Resistance	ISO 10545-12	Frost Proof
Chemical Resistance - Household Chemicals	ISO 10545-13	Resistant
Chemical Resistance - Low Concentration of Acids and Bases	ISO 10545-13	Resistant
Resistance to Stains	ISO 10545-14	Class 5
Crazing Resistance of Glazed Tiles	ISO 10545-11	Resists

SHADE VARIATION



V3 - MODERATE VARIATION

While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece may vary significantly. For example "that little bit of color" on one piece of tile may be the primary color on the next piece.

WEAR CODE

4 - Rated for all residential and light commercial applications.

APPLICATIONS

	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL
FLOORS	✗	✗	
WALLS / BACKSPLASH	✗	✗	✗
POOL DECKING	*		
EXTERNAL USE - FROST PROOF	✗		

✗ - Has been approved for this application.

* - Information is available upon request.

NOTES

It is not recommended to stagger any tile longer than 18" more than 1/3 the length of the tile.

Always inspect materials prior to installation.

Always mix 2-3 cartons at a time while installing to insure the best blend.