





# Pantheon Stone | Glazed Porcelain




#### **AVAILABLE SIZES**





### DESCRIPTION

Pantheon Stone is a high quality Italian porcelain evoking the classic materials used in Roman architectural features. Showcasing an elegant breccia marble screen with light veining, Pantheon Stone is available in four beautiful colors and two standard tile formats, 12" x 24" and 9" x 36". Or, liven up your space with a large 14" hexagon shape for a most impressive design. With coordinating mosaics and trim, all formats are suitable for residential and commercial applications.

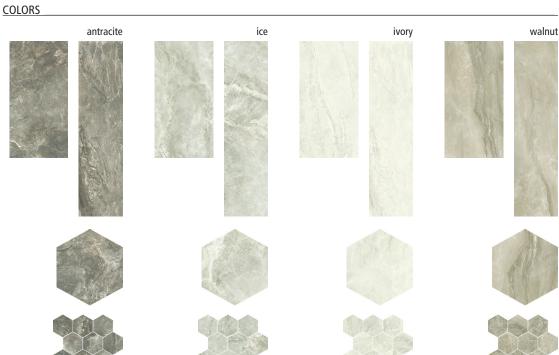















3x24 Bullnose

## TECHNICAL INFORMATIC

#### **TILE SIZES**

Nominal	Shape	Finish	Thickness
12 x 24		Matte	10 mm
9 x 36		Matte	10 mm
14 x 16 Hexagon	$\bigcirc$	Matte	10 mm
4" Hexagon Mosaic		Matte	10 mm
3 x 3 Mosaic	0000	Matte	10 mm

#### COORDINATING TRIM

Nominal	Shape	Finish	Thickness
3 x 24 Bullnose		Matte	10 mm

#### PERFORMANCE DATA

CHARACTERISTIC	NORMS	RESULTS
Water Absorption	ISO 10545-3	≤ 0.5 %
Deep Abrasion	ISO 10545-6	≤ 175 mm3
PEI Abrasion Resistance (Glazed)	ISO 10545-7	5
Breaking Strength	ISO 10545-4	> 35 N/mm2
Dynamic Coefficient of Friction Wet	C1028	0.65-0.68
Frost Resistance	ISO 10545-12	Frost Proof
Chemical Resistance - Household Chemicals	ISO 10545-13	Resistant
Chemical Resistance - Low Concentration of Acids and Bases	ISO 10545-13	Resistant
Scratch Hardness	MOHS	6
Thermal Shock Resistance	ISO 10545-9	Resistant
Resistance to Stains	ISO 10545-14	Class 5

### **SHADE VARIATION**



V3 - MODERATE VARIATION

While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece may vary significantly. For example "that little bit of color" on one piece of tile may be the primary color on the next piece.

#### WEAR CODE

5 - Rated for all residential and commercial applications.

#### **APPLICATIONS**

	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL
FLOORS	×	×	×
WALLS / BACKSPLASH	×	×	×
POOL DECKING	*		
EXTERNAL USE - FROST PROOF	*		

**x** - Has been approved for this application.

\* - Information is available upon request.

#### NOTES

It is not recommended to stagger any tile longer than 18" more than 1/3 the length of the tile.

Always inspect materials prior to installation.

Always mix 2-3 cartons at a time while installing to insure the best blend.