


Roman Travertine

Glazed Porcelain




AVAILABLE SIZES

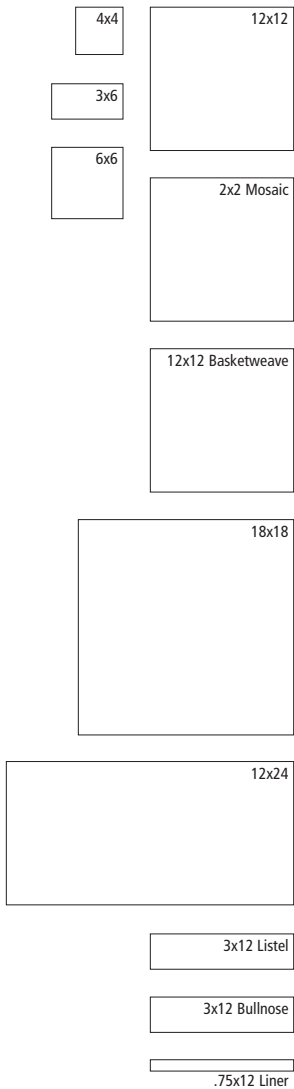

DESCRIPTION







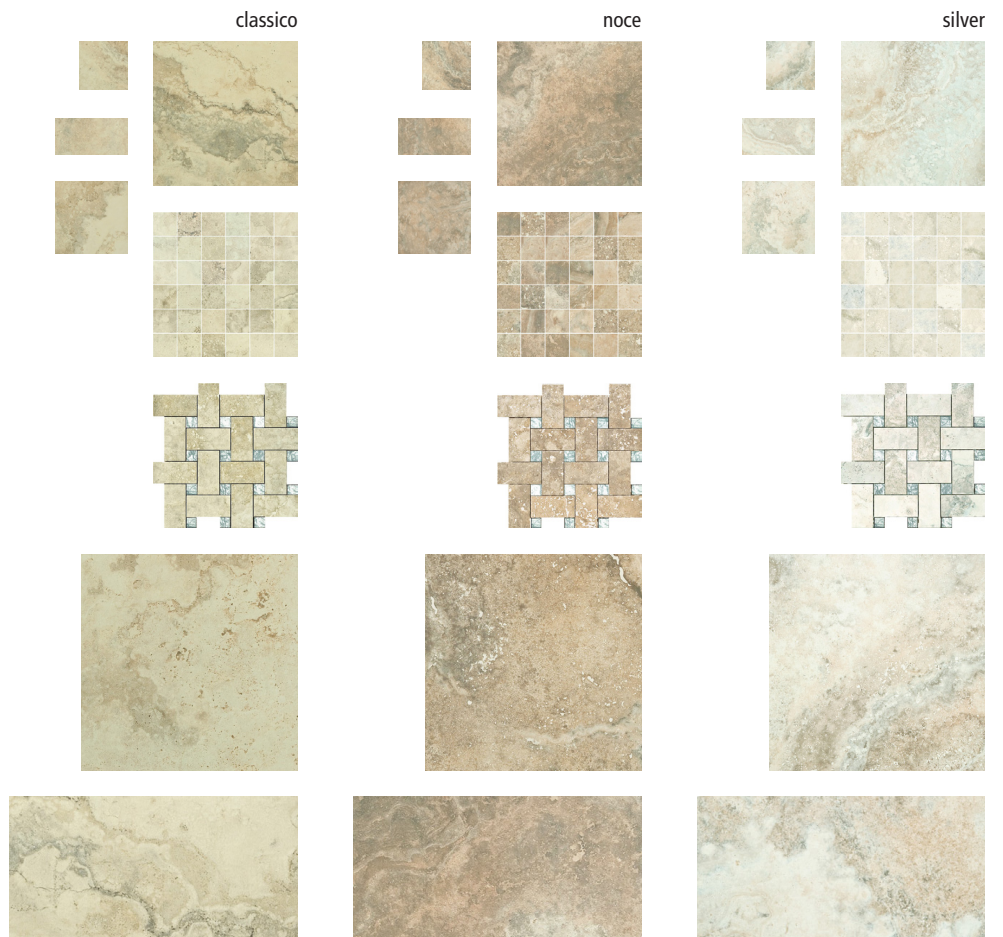

Roman Travertine is a glazed porcelain from Italy that's so realistic you will think it's true stone! Each color is taken from a photo of actual stone and then adjusted to the perfect hue. Available in a variety of sizes, this series has everything - the utmost in tile technology paired with spectacular beauty!

COLORS






TECHNICAL INFORMATION

TILE SIZES

Nominal	Shape	Finish	Thickness
4 x 4		Matte	10 mm
3 x 6		Matte	10 mm
6 x 6		Matte	10 mm
12 x 12		Matte	10 mm
2x2 Mosaic		Matte	10 mm
12 x 12 Basketweave		Matte	10 mm
18 x 18		Matte	10 mm
12 x 24		Matte	10 mm

COORDINATING TRIM

Nominal	Shape	Finish	Thickness
3 x 12 Listel		Matte	10 mm
3 x 12 Bullnose		Matte	10 mm
.75 x 12 Liner		Matte	10 mm

PERFORMANCE DATA

CHARACTERISTIC	NORMS	RESULTS
Water Absorption	ISO 10545-3	≤ 0.5 %
PEI Abrasion Resistance (Glazed)	ISO 10545-7	4
Breaking Strength	ISO 10545-4	> 40N/mm ²
Static Coefficient of Friction Wet	C1028	≥ 0.60
Dimensions Range	ISO 10545-2	Conforms
Frost Resistance	ISO 10545-12	Frost Proof
Chemical Resistance - Household Chemicals	ISO 10545-13	GA
Chemical Resistance - Low Concentration of Acids and Bases	ISO 10545-13	GLA
Scratch Hardness	MOHS	7
Thermal Shock Resistance	ISO 10545-9	Resistant
Resistance to Stains	ISO 10545-14	Class 4

SHADE VARIATION



V3 - MODERATE VARIATION

While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece may vary significantly. For example "that little bit of color" on one piece of tile may be the primary color on the next piece.

WEAR CODE

4 - Rated for all residential and light commercial applications.

APPLICATIONS

	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL
FLOORS	✗	✗	
WALLS / BACKSPLASH	✗	✗	✗
POOL DECKING	*	*	
EXTERNAL USE - FROST PROOF	✗	*	

✗ - Has been approved for this application.

* - Information is available upon request.

NOTES

It is not recommended to stagger any tile longer than 18" more than 1/3 the length of the tile.

Always inspect materials prior to installation.

Always mix 2-3 cartons at a time while installing to insure the best blend.