



Stax | Glazed Porcelain




AVAILABLE SIZES



DESCRIPTION




In Italy, poured cement is covered with wooden planks until cured. When the planks are removed, a textured wood impression remains on the surface. Stax, an Italian porcelain tile suitable for both floors and walls, replicates this look. Stax is a premier, high-quality, colored-body porcelain, providing long lasting durability in all types of commercial and residential installations. Available in six color blends on a 12x24 porcelain tile with coordinating mosaics and trim.

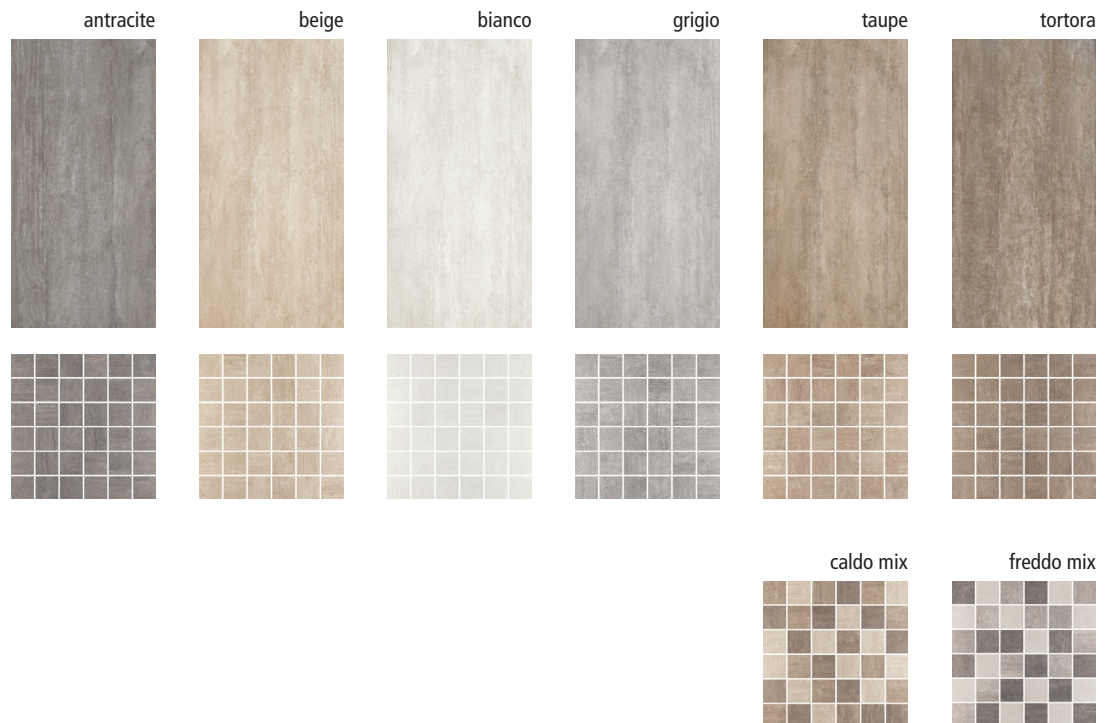COLORS




TECHNICAL INFORMATION

TILE SIZES

Nominal	Shape	Finish	Thickness
12 x 24		Matte	9.5 mm
2 x 2 Mosaic		Matte	9.5 mm
1 x 1 Mix Mosaic		Matte	9.5 mm

COORDINATING TRIM

Nominal	Shape	Finish	Thickness
3.125 x 24 Bullnose		Matte	9.5 mm

PERFORMANCE DATA

CHARACTERISTIC	NORMS	RESULTS
Water Absorption	ISO 10545-3	≤ 0.5 %
PEI Abrasion Resistance (Glazed)	ISO 10545-7	5
Breaking Strength	ISO 10545-4	> 35N/mm ²
Static Coefficient of Friction Wet	C1028	0.63
Dimensions Range	ISO 10545-2	Conforms
Facial Range of Thickness	ISO 10545-2	± 0.5 %
Warpage (Diagonal)	ISO 10545-2	± 0.5 %
Wedging	ISO 10545-2	± 0.5 %
Frost Resistance	ISO 10545-12	Frost Proof
Chemical Resistance - Household Chemicals	ISO 10545-13	GA
Chemical Resistance - Low Concentration of Acids and Bases	ISO 10545-13	GLA
Thermal Shock Resistance	ISO 10545-9	Resistant
Resistance to Stains	ISO 10545-14	Class 5
Crazing Resistance of Glazed Tiles	ISO 10545-11	Resistant

SHADE VARIATION



V3 - MODERATE VARIATION

While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece may vary significantly. For example "that little bit of color" on one piece of tile may be the primary color on the next piece.

WEAR CODE

5 - Rated for all residential and commercial applications.

APPLICATIONS

	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL
FLOORS	×	×	×
WALLS / BACKSPLASH	×	×	×
POOL DECKING			
EXTERNAL USE - FROST PROOF	×	*	*

× - Has been approved for this application.
* - Information is available upon request.

NOTES

It is not recommended to stagger any tile longer than 18" more than 1/3 the length of the tile.

Always inspect materials prior to installation.

Always mix 2-3 cartons at a time while installing to insure the best blend.