


Ocean Blue | Porcelain



AVAILABLE SIZES

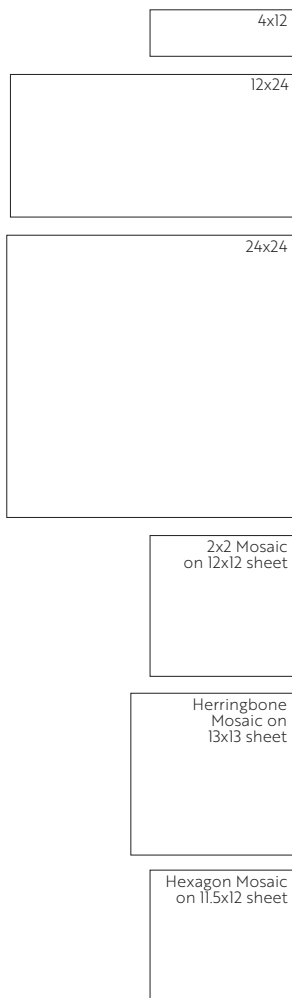


DESCRIPTION

Ocean Blue is a rectified porcelain tile series offering a fanciful stone that does not exist in nature: Calacatta marble with stunning blue veining. This unique, creative interpretation of white marble trends in Carrara, Calacatta, Statuary and Dolomite looks will bring creative ingenuity to your design. Field tile formats in both matte or polished finishes include 12" x 24" rectangular tile, 4" x 12" rectangular tile and 24" x 24" large format tile. For design reach, the series comes with 2" x 2" mosaic tile, 4" Hexagon mosaic tile or a 1" x 3" Herringbone tile. Ocean Blue matte is rated PEI 4 for all Light Commercial and Residential settings, while Ocean Blue polished is rated PEI 3 for all Residential settings.






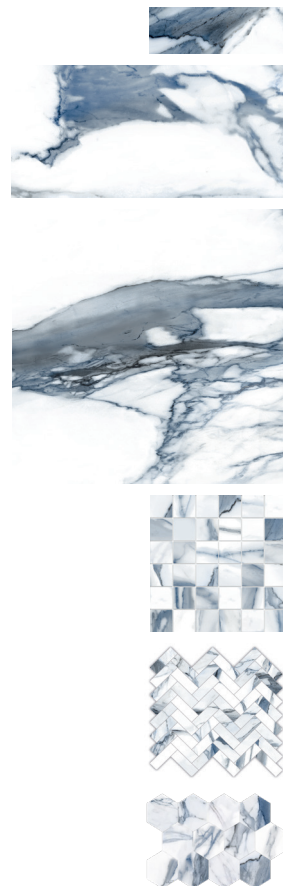


COLORS

ocean blue




TECHNICAL INFORMATION

TILE SIZES

Nominal	Shape	Finish	Thickness	Availability
4 x 12 Rectified		Matte / Polished	9 mm	✓
12 x 24 Rectified		Matte / Polished	9 mm	✓
24 x 24 Rectified		Matte / Polished	9 mm	✓
24 x 48 Rectified		Matte / Polished	9 mm	⌚
48 x 48 Rectified		Matte / Polished	9 mm	⌚
2 x 2 Mosaic		Matte	9 mm	✓
1 x 3 Herringbone Mosaic		Matte	9 mm	✓
4 x 4.5 Hexagon Mosaic		Matte	9 mm	✓

COORDINATING TRIM

Nominal	Shape	Finish	Thickness	Availability
3 x 24 Bullnose		Matte / Polished	9 mm	✓

✓ Stock Item. ⌚ Non-Stock Item. Requires Extra Lead Time.

PERFORMANCE DATA

Characteristic	Norms	Results
Water Absorption	ISO 10545-3	0.20 %
Abrasion Resistance	ISO 10545-7	Matte - 4 Polished - 3
Breaking Strength	ISO 10545-4	Matte - 40-45 N/mm2 Polished - 45-50 N/mm2
Dynamic Coefficient of Friction Wet	AcuTest	Matte - 0.5
Dimensions Range	ISO 10545-2	Conforms
Frost Resistance	ISO 10545-12	Frost Proof
Chemical Resistance - Household Chemicals	ISO 10545-13	Min. Class B
Thermal Shock Resistance	ISO 10545-9	Resistant
Resistance to Stains	ISO 10545-14	Min. Class 3
Crazing Resistance of Glazed Tiles	ISO 10545-11	Resistant

SHADE VARIATION



V3 - MODERATE VARIATION

While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece may vary significantly. For example "that little bit of color" on one piece of tile may be the primary color on the next piece.

WEAR CODE

Matte : 4 - Rated for all residential and light commercial applications.

Polished: 3 - Rated for all residential applications.

APPLICATIONS

	Residential	Light Commercial	Commercial
FLOORS	✗	✗ (Matte Only)	
WALLS / BACKSPLASH	✗	✗	✗
POOL DECKING	* (Matte Only)		
EXTERNAL USE - FROST PROOF	* (Matte Only)		

✗ - Has been approved for this application.

* - Information is available upon request.

NOTES

It is not recommended to stagger any tile longer than 15" more than 1/3 the length of the tile.

Minimum Grout Joint Recommendation: 1/8"

Always inspect materials prior to installation.

Always mix 2-3 cartons at a time while installing to insure the best blend.

All product images are representative only. Variation in color and shading is to be expected. Final selection should be made from actual tile samples.