


Open your style

A E X T R A 2 0

PORCELAIN TILE PAVERS
BALDOSAS DE GRES PORCELÁNICO

MADE IN USA



DESIGNED IN ITALY

◆ CÆSAR ◆
CERAMICS USA

01

WHAT IS

QUÉ ES

— Amplify the emotions of outdoor living.

Amplifica las emociones de la vida al aire libre.

— Be inspired by different looks.

Déjate inspirar por diferentes looks.

— 4 different installation options.

4 opciones de instalación diferentes.

3/4" [2cm]

A E X T R A 2 0

The Aextra20 porcelain stoneware tile collection in extra thickness is designed to significantly broaden the horizons of outdoor design.


La línea de gres porcelánico Aextra20 de espesor superior está pensada para ampliar enormemente los horizontes del diseño de exteriores.

02

COLORS SIZES & FINISHES

COLORES, FORMATOS y ACABADOS

— Size / Formato



24"×24"

— Thickness / Espesor



3/4" [2cm]

— Material /Material

Caesar Aextra20 porcelain stoneware slabs are **monolithic** in **20mm thickness**, are perfectly rectified and squared and have an **anti-slip surface finish**.

Las baldosas de gres porcelánico Aextra20 de Caesar son **monolíticas**, de **20 mm de espesor**, perfectamente rectificadas y escuadradas, **con acabado superficial antideslizante**.

A E X T R A 2 0



Rectified Tile / Losa rectificada

— Color options / Colores

Stone look



TITANIO



GEA



GRAUSTEIN

Wood look



ROVERE



CINDER

Terrazzo look



RIMINI

03

INSTALLATION

COLOCACIÓN




CARRIAGEABLE FOOTING
INSTALLATION WITH
ADHESIVES
PAVIMENTO TRANSITABLE
COLOCACIÓN CON COLA



PATIO
RAISED INSTALLATION
PATIO
COLOCACIÓN SOBREELEVADA



GARDEN
INSTALLATION ONTO
GRASS
JARDÍN
COLOCACIÓN SOBRE CÉSPED



GARDEN
INSTALLATION ONTO
GRAVEL
JARDÍN
COLOCACIÓN SOBRE GRAVA



04

RECOMMENDATIONS FOR INSTALLATION RECOMENDACIONES DE COLOCACION



Aextra20 can be easily installed onto grass substrates simply by following the recommendations set out here: trace the encumbrance of the slabs and dig the substrate up to 3 cm. Then apply a layer of gravel to ensure perfect drainage and proceed with the installation of slabs always checking the planarity of the surface.

AEXTRA20 se puede colocar sobre césped, tomando algunas precauciones sencillas: primero hay que trazar el gálbo de las baldosas y excavar a una profundidad de 3 cm. Luego se extiende una capa de grava, en garantía de un drenaje correcto: por último, es posible colocar las baldosas verificando la planaridad de la superficie.




- A LAYER OF GRAVEL OF 5 CM (GRANULOMETRY 4/8 MM)**
Grava 5 cm (granulometría 4 - 8 mm)
- B SOIL**
Terreno



Compared to standard thickness tiles Aextra20 slabs, installed using the traditional technique, offer a higher resistance to loads which is particularly suitable for carriageable floors.

En comparación con las baldosas de espesor tradicional, las piezas cerámicas aextra20 colocadas con la técnica tradicional ofrecen una resistencia a las cargas superior, ideal en las pavimentaciones para el tránsito de vehículos.

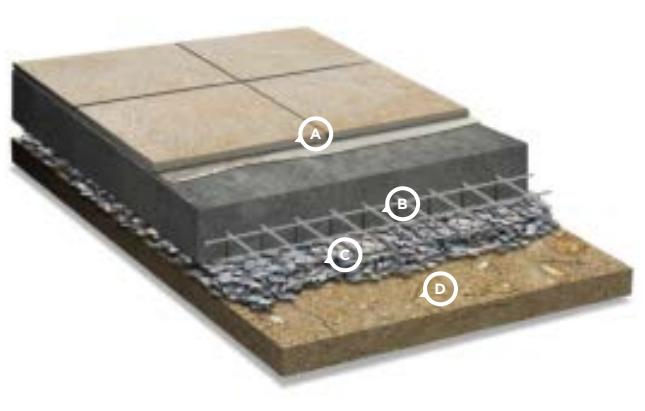

- A ADHESIVE**
Adhesivo
- B FOOTING WITH ELECTRO-WELDED NET**
Losa con red electrosoldada
- C DRAINING LAYER**
Capa de drenaje
- D SOIL**
Terreno



Aextra20 can be installed onto gravel substrates simply by placing the slabs adjacent to one another or creating pathways by installing individual slabs onto the gravel support. It is also advantageous to integrate, below the layer of superficial gravel, another layer of gravel and or pebbles in order to ensure perfect drainage. This installation solution is functional, quick and with a strong visual impact.

AEXTRA20 se puede colocar en seco directamente sobre superficies de grava, simplemente yuxtaponiendo las baldosas entre sí; también es posible realizar caminos, disponiendo a gusto y hundiendo las baldosas individualmente en la grava. Debajo de la grava ornamental extendida en superficie, es oportuno prever otra capa de pedregullo para el drenaje del agua pluvial. Esta modalidad de colocación es práctica, rápida y elegante.




- A LAYER OF GRAVEL OF 5 CM (GRANULOMETRY 4/8 MM)**
Grava 5 cm (granulometría 4 - 8 mm)
- B DRAINING GRAVEL LAYER**
Pedregullo drenante
- C SOIL**
Terreno



For raised installation, Aextra20 slabs are installed onto supports with a distance of 3mm between adjacent slabs once the underlying footing has been duly layered with water-proofing materials. In this way, there is a technical gap below the foot-plan that can be easily inspected by lifting the slabs.

En la modalidad sobreelevada, por encima de la losa adecuadamente impermeabilizada, las baldosas aextra20 se colocan en seco sobre soportes especiales que determinan una distancia de aproximadamente 3 mm. De esta manera se crea un espacio técnico debajo del plano de tránsito, inspeccionable simplemente levantando las baldosas.

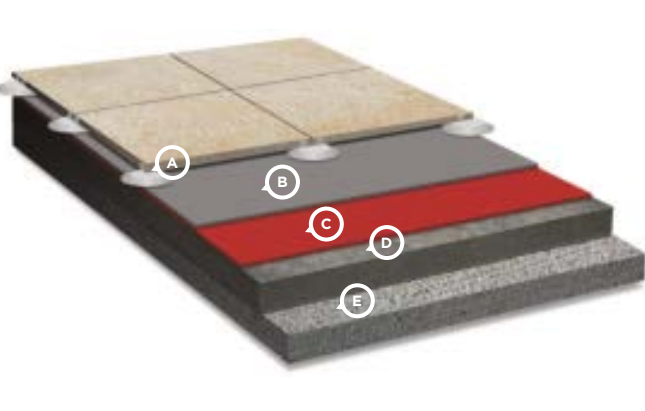

- A SUPPORTS**
Soportes
- B DRAINAGE SHEATH**
Funda drenante
- C WATER-PROOFING SHEATH**
Funda impermeabilizante
- D INCLINED FOOTING**
Losa en pendiente
- E SOIL**
Entramado

ADVANTAGES OF AEXTRA20 PAVERS

VENTAJAS DE LAS BALDOSAS AEXTRA20



SINGLE-PIECE
MONOLÍTICO



RESISTANT TO SALTS
RESISTENTE A LAS SALES



ECO-SUSTAINABLE
SOSTENIBLE



ANTI-SLIP
ANTIDESLIZANTE




FIRE-PROOF
IGNÍFUGO



RESISTANT TO LOADS
RESISTENTE A LAS CARGAS



FROST-PROOF
RESISTENTE A LAS HELADAS



RESISTANT TO THERMAL SHOCK
RESISTENTE A LAS VARIACIONES TÉRMICAS



WEAR RESISTANT
RESISTENTE AL DESGASTE




RESISTANT TO MOULD AND MOSS
INVULNERABLE A MOHO Y MUSGO

ADVANTAGES OF DRY-SYSTEM INSTALLATION

VENTAJAS DE LA COLOCACIÓN EN SECO



INSTALLATION ONTO GRASS
COLOCACIÓN SOBRE CÉSPED

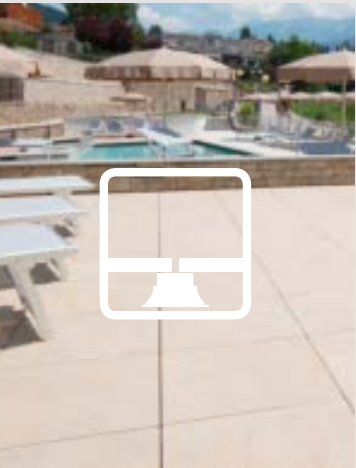


RAISED INSTALLATION
COLOCACIÓN SOBREELEVADA



INSTALLATION ONTO GRAVEL/SAND
COLOCACIÓN SOBRE GRAVA/ARENA



INSTALLATION ONTO GRAVEL/SAND
COLOCACIÓN SOBRE GRAVA/ARENA




QUICK AND EASY TO INSTALL
FÁCIL Y RÁPIDO DE INSTALAR




REUSABLE
REUTILIZABLE



AVOIDING THE RISK OF BREAKING AND CRACKS
PREVIENE FISURAS Y ROTURAS





EASY TO INSPECT AND REMOVABLE
INSPECCIONABLE Y AMOVIBLE



CORRECTING PLANARITY DEFECTS
RESUELVE PROBLEMAS DE PLANARIDAD

SOLUTIONS FOR THE OUTDOOR

SOLUCIONES PARA EL AMBIENTE EXTERIOR

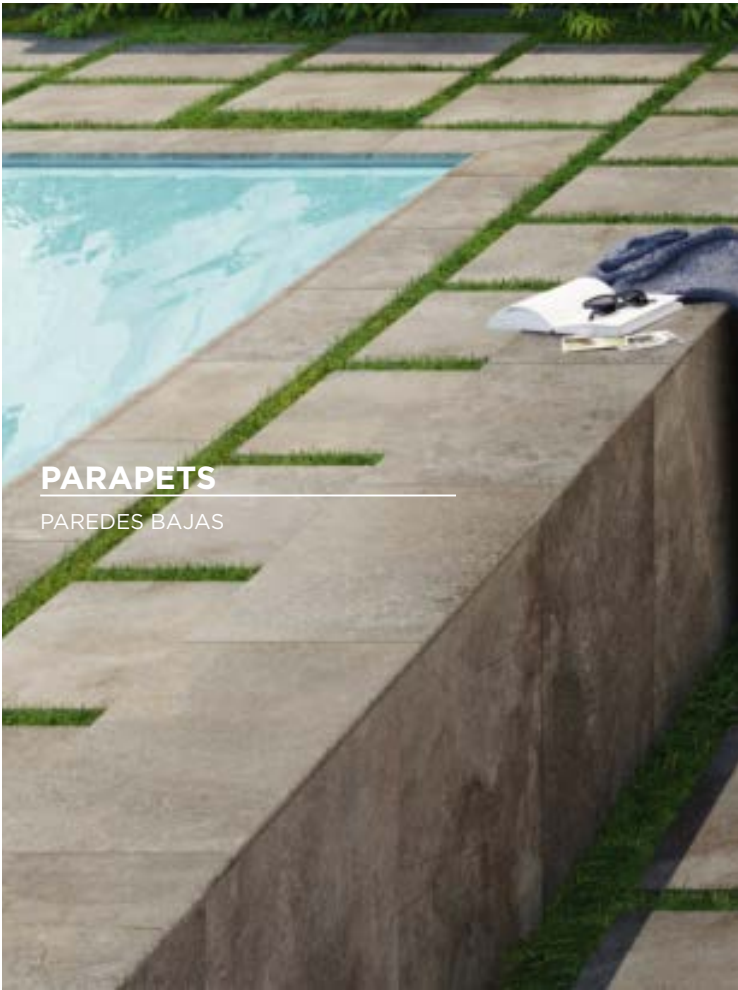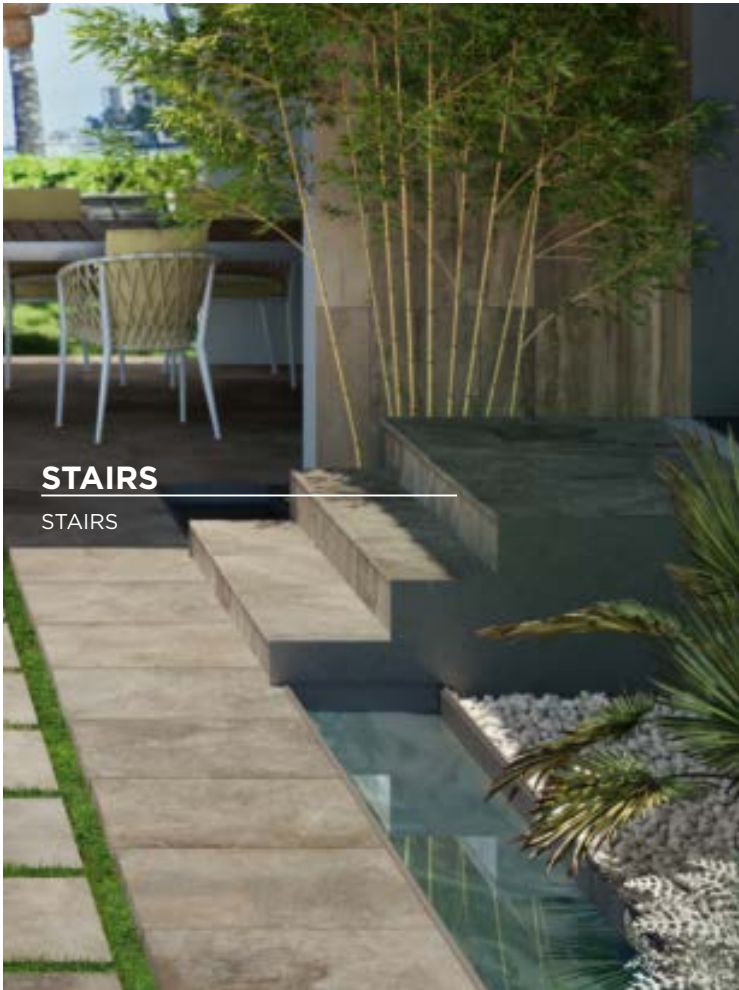

TRIMS

PIEZAS ESPECIALES

Available in all the Aextra20 colors
Disponibles en todos los colores Aextra20

A E X T R A 2 0



12"x24" XSTEP



12"x24" XSTEP INTERNAL CORNER



12"x24" XSTEP EXTERNAL CORNER




12"x24" ROUND



12"x24" ROUND INTERNAL CORNER



12"x24" ROUND EXTERNAL CORNER

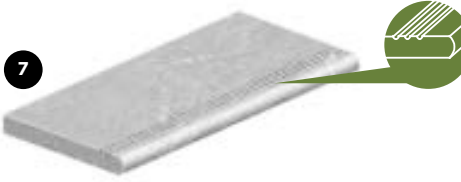

12"x24" XGRIP



12"x24" XGRIP INTERNAL CORNER




12"x24" XGRIP EXTERNAL CORNER



6"x24" RISER



6"x24" POOL GRID



6"x24" POOL GRID CORNERS




12"x24" TOP




12"x24" TOP END

TITANIO

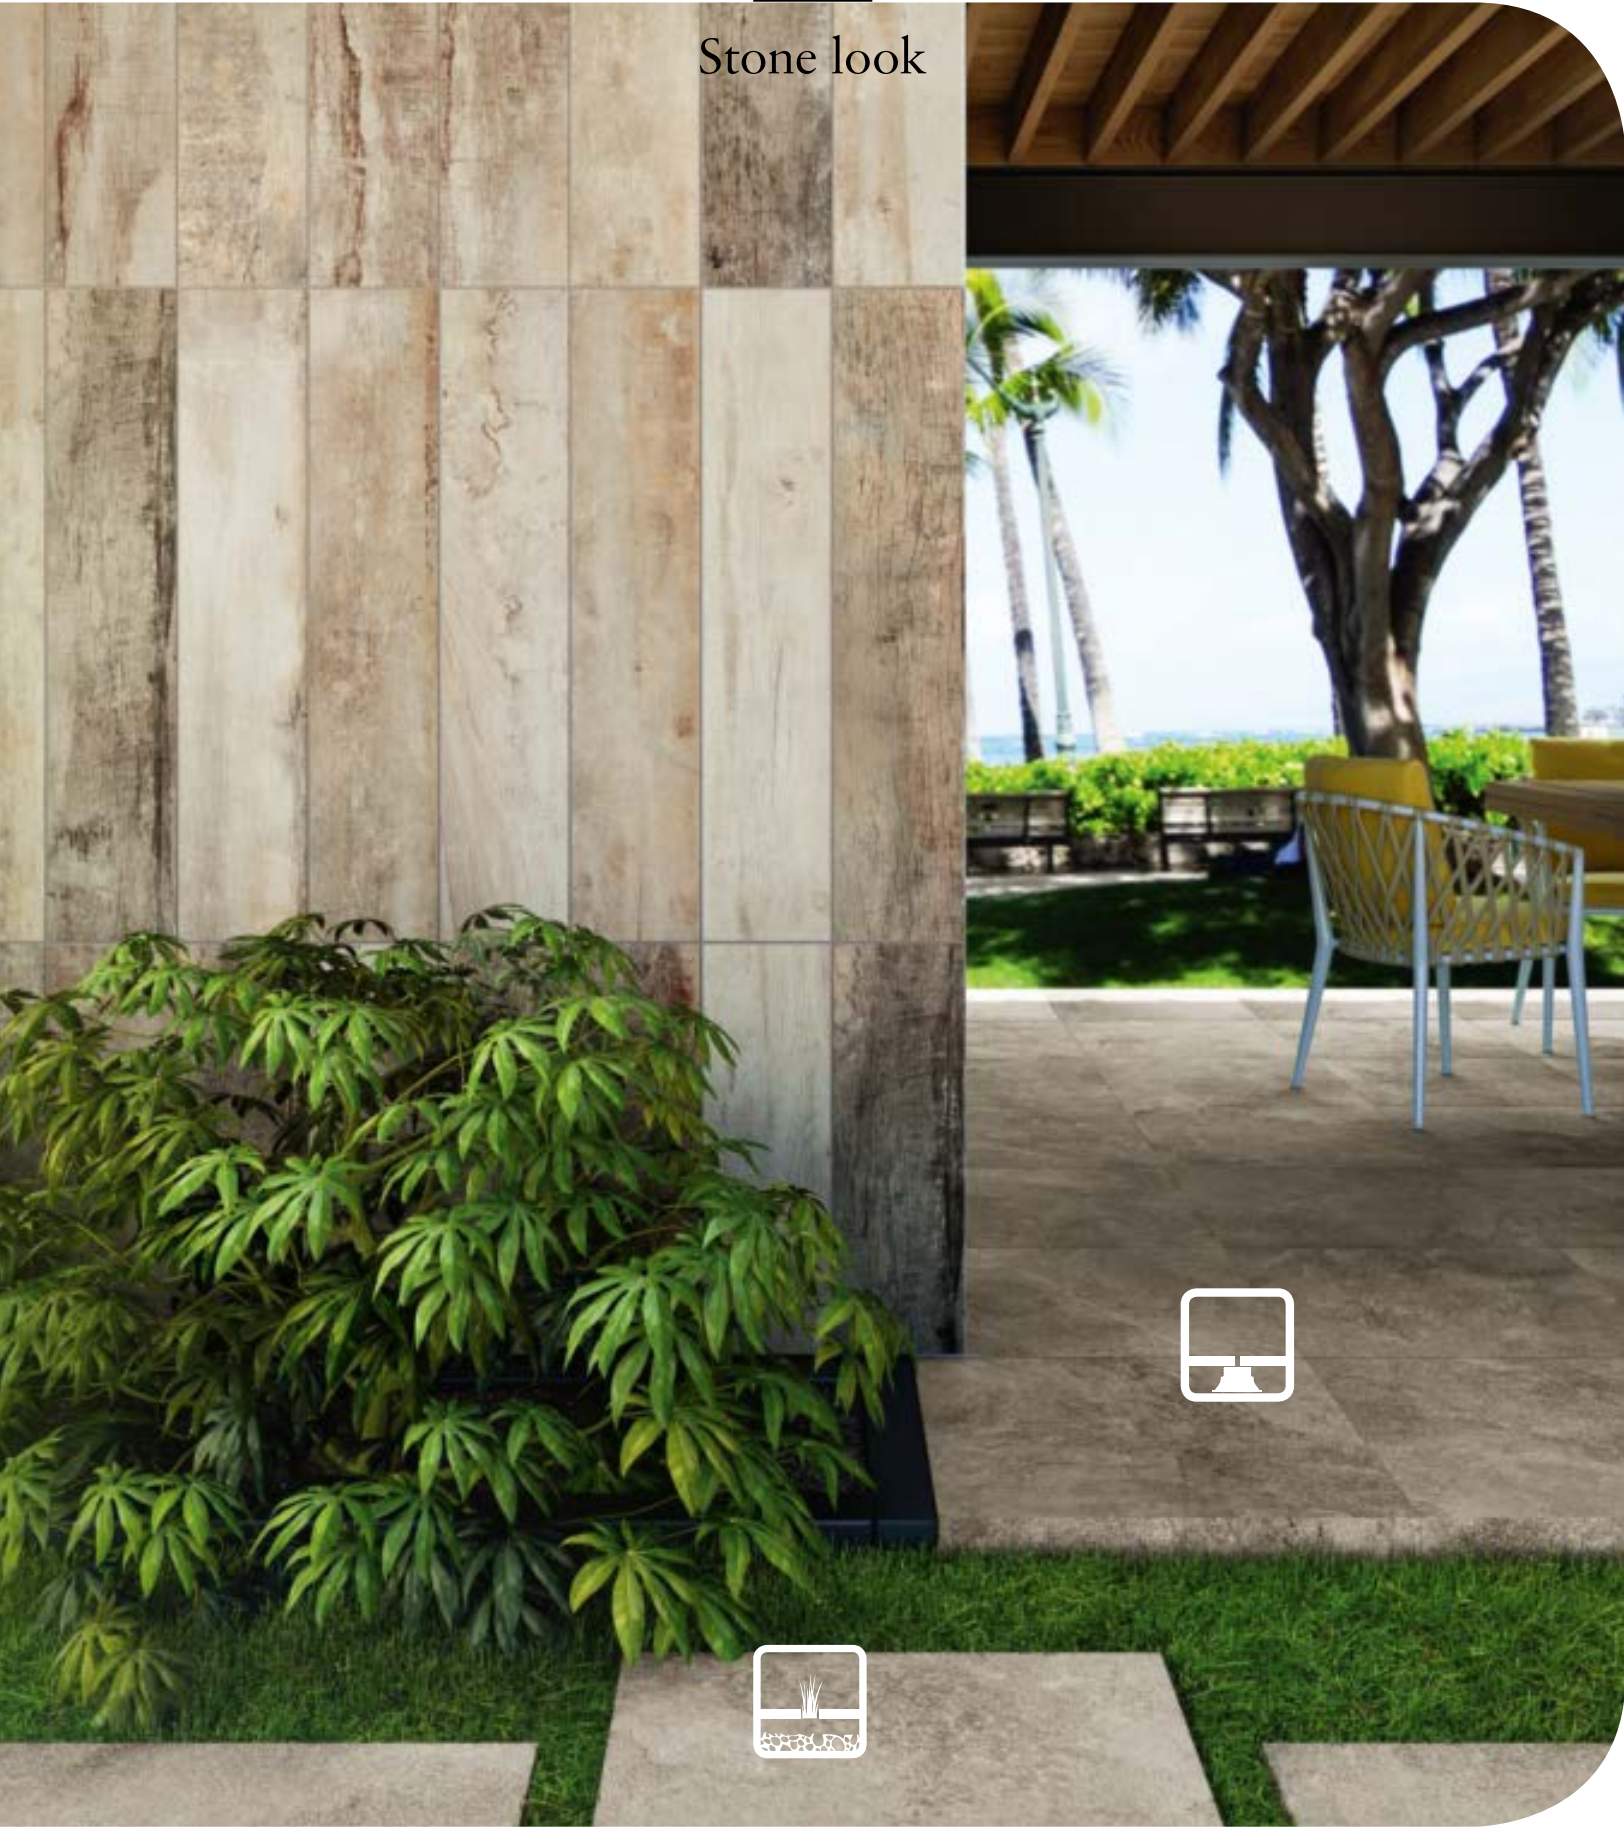

24"x24" TITANIO / 8"x40" REVIVE GINGER

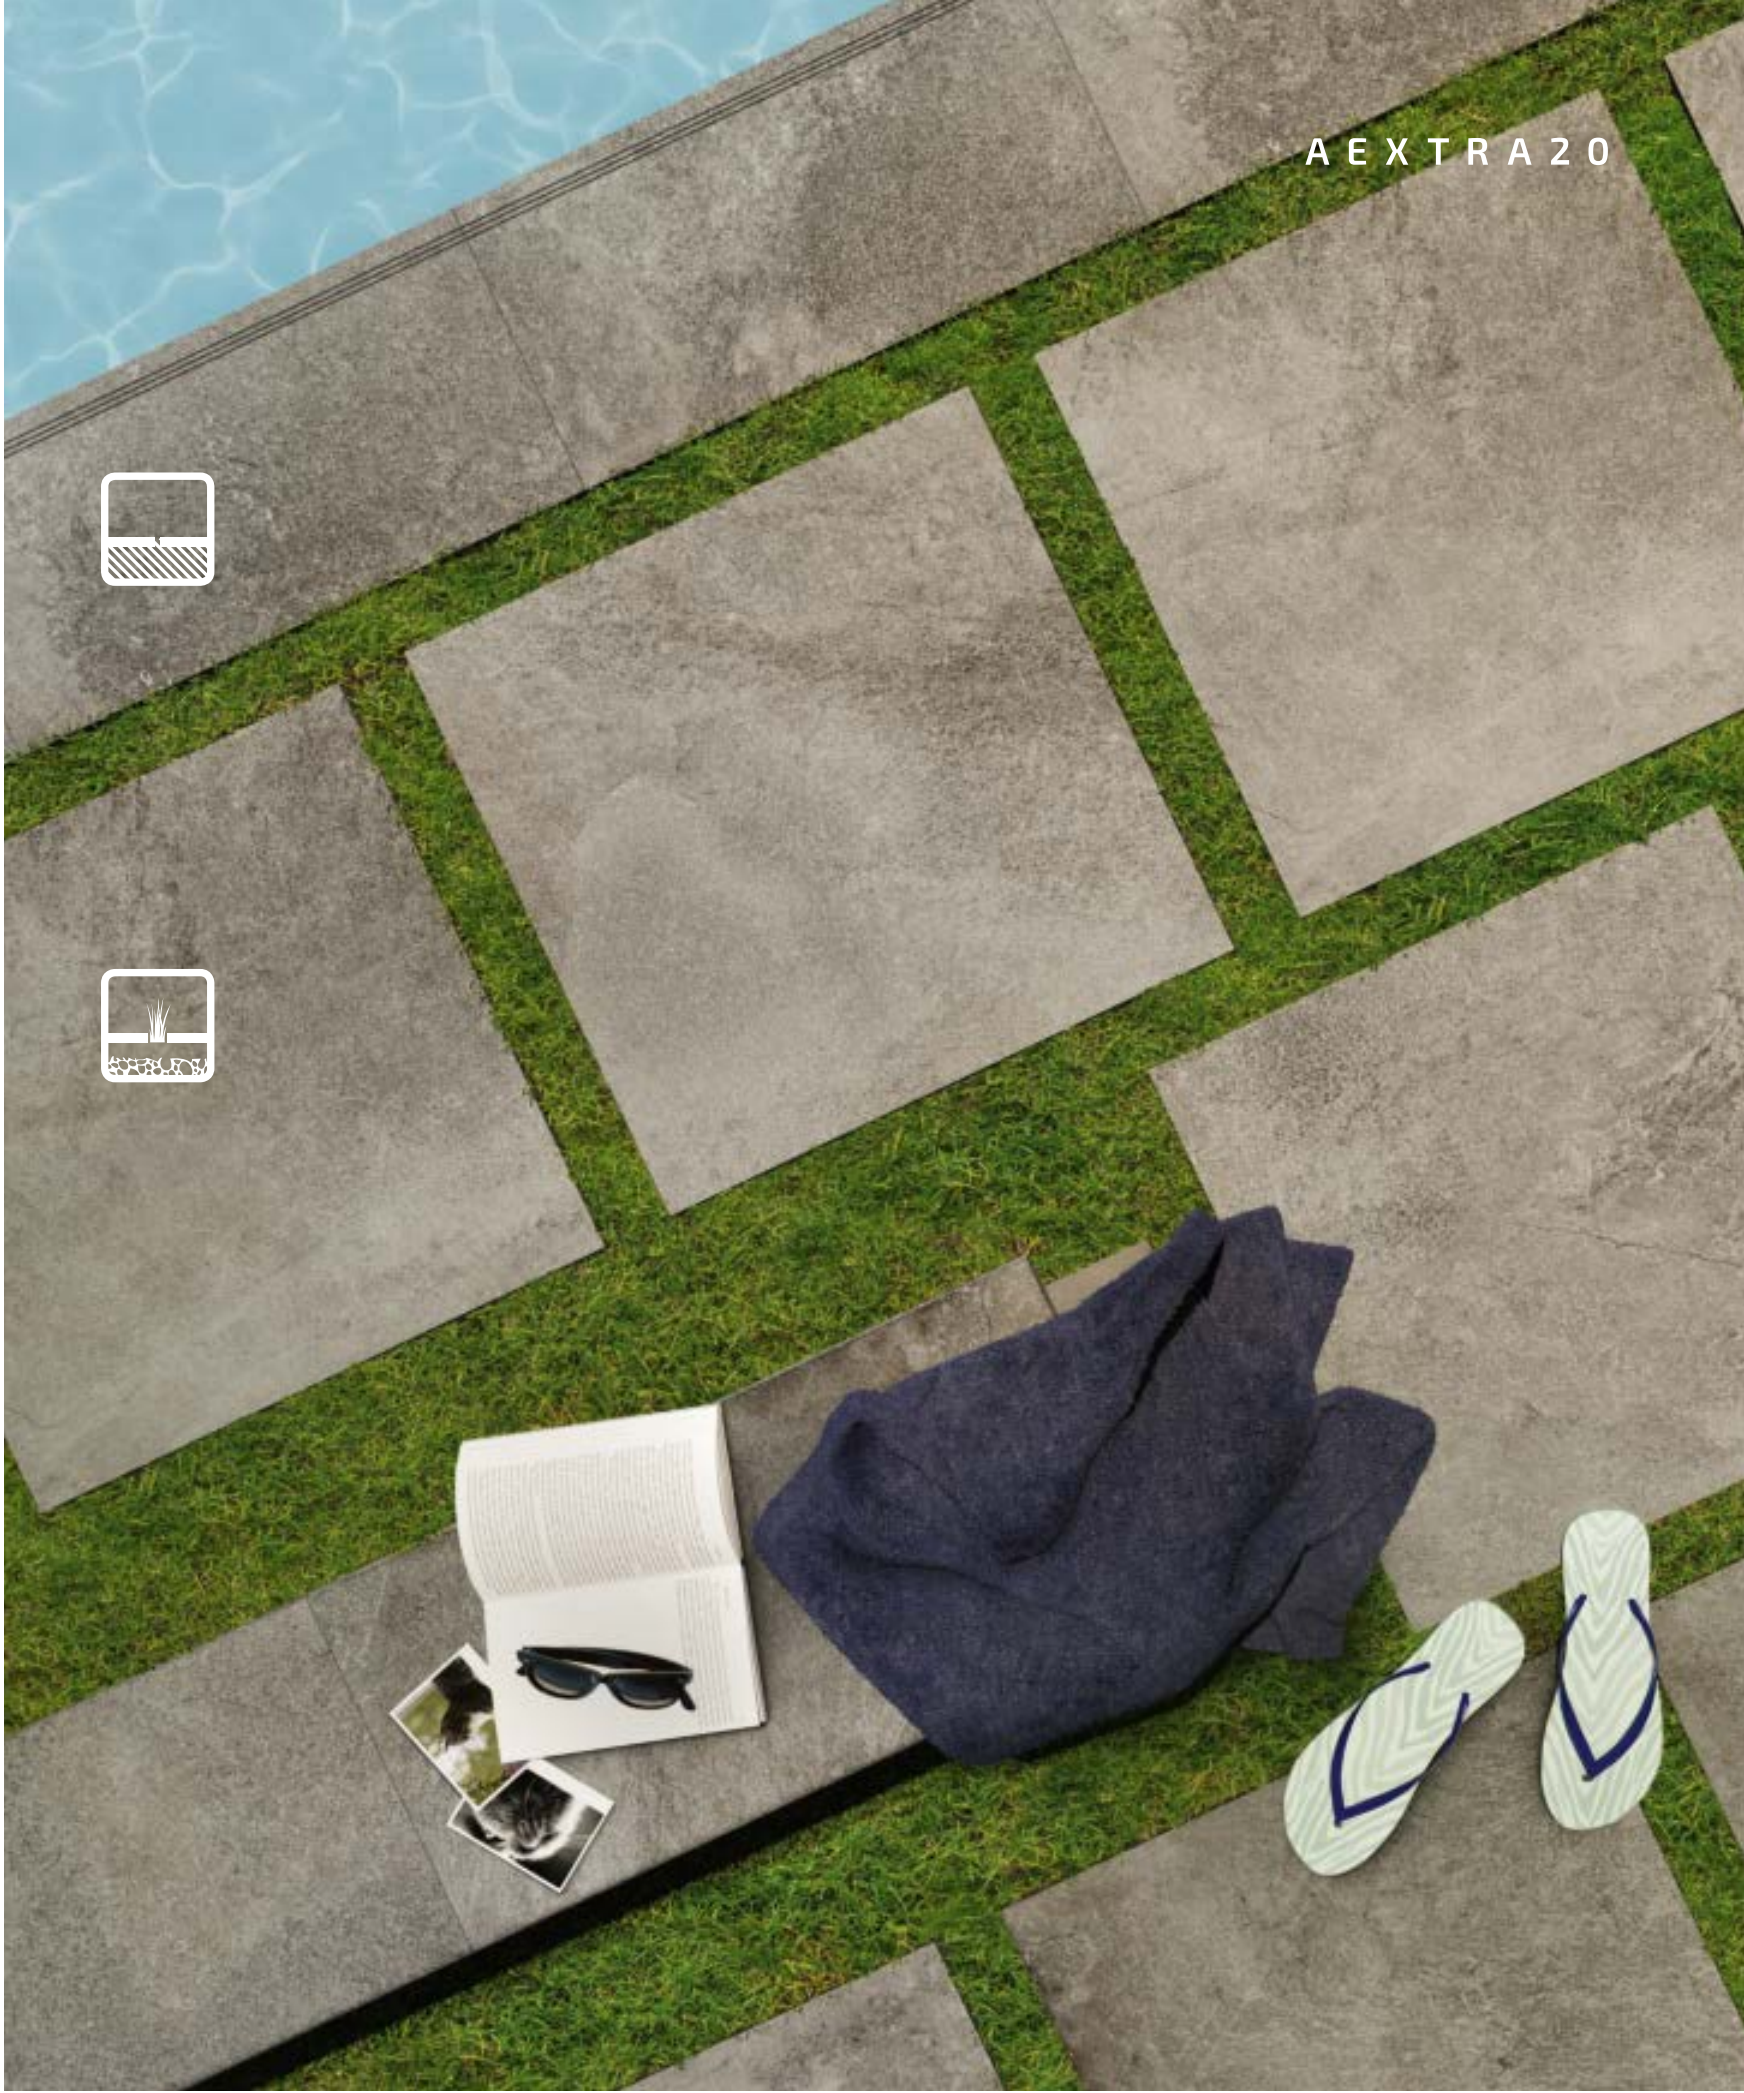

24"x24" TITANIO / 12"x24" XSTEP TITANIO / 12"x24" TOP TITANIO




24"x24" TITANIO / 12"x24" XSTEP TITANIO / 12"x24" TOP TITANIO / 12"x24" TOP END TITANIO / 8"x40" REVIVE GINGER

12"x24" XGRIP TITANIO / 6"x24" RISER TITANIO

GEA

Stone look

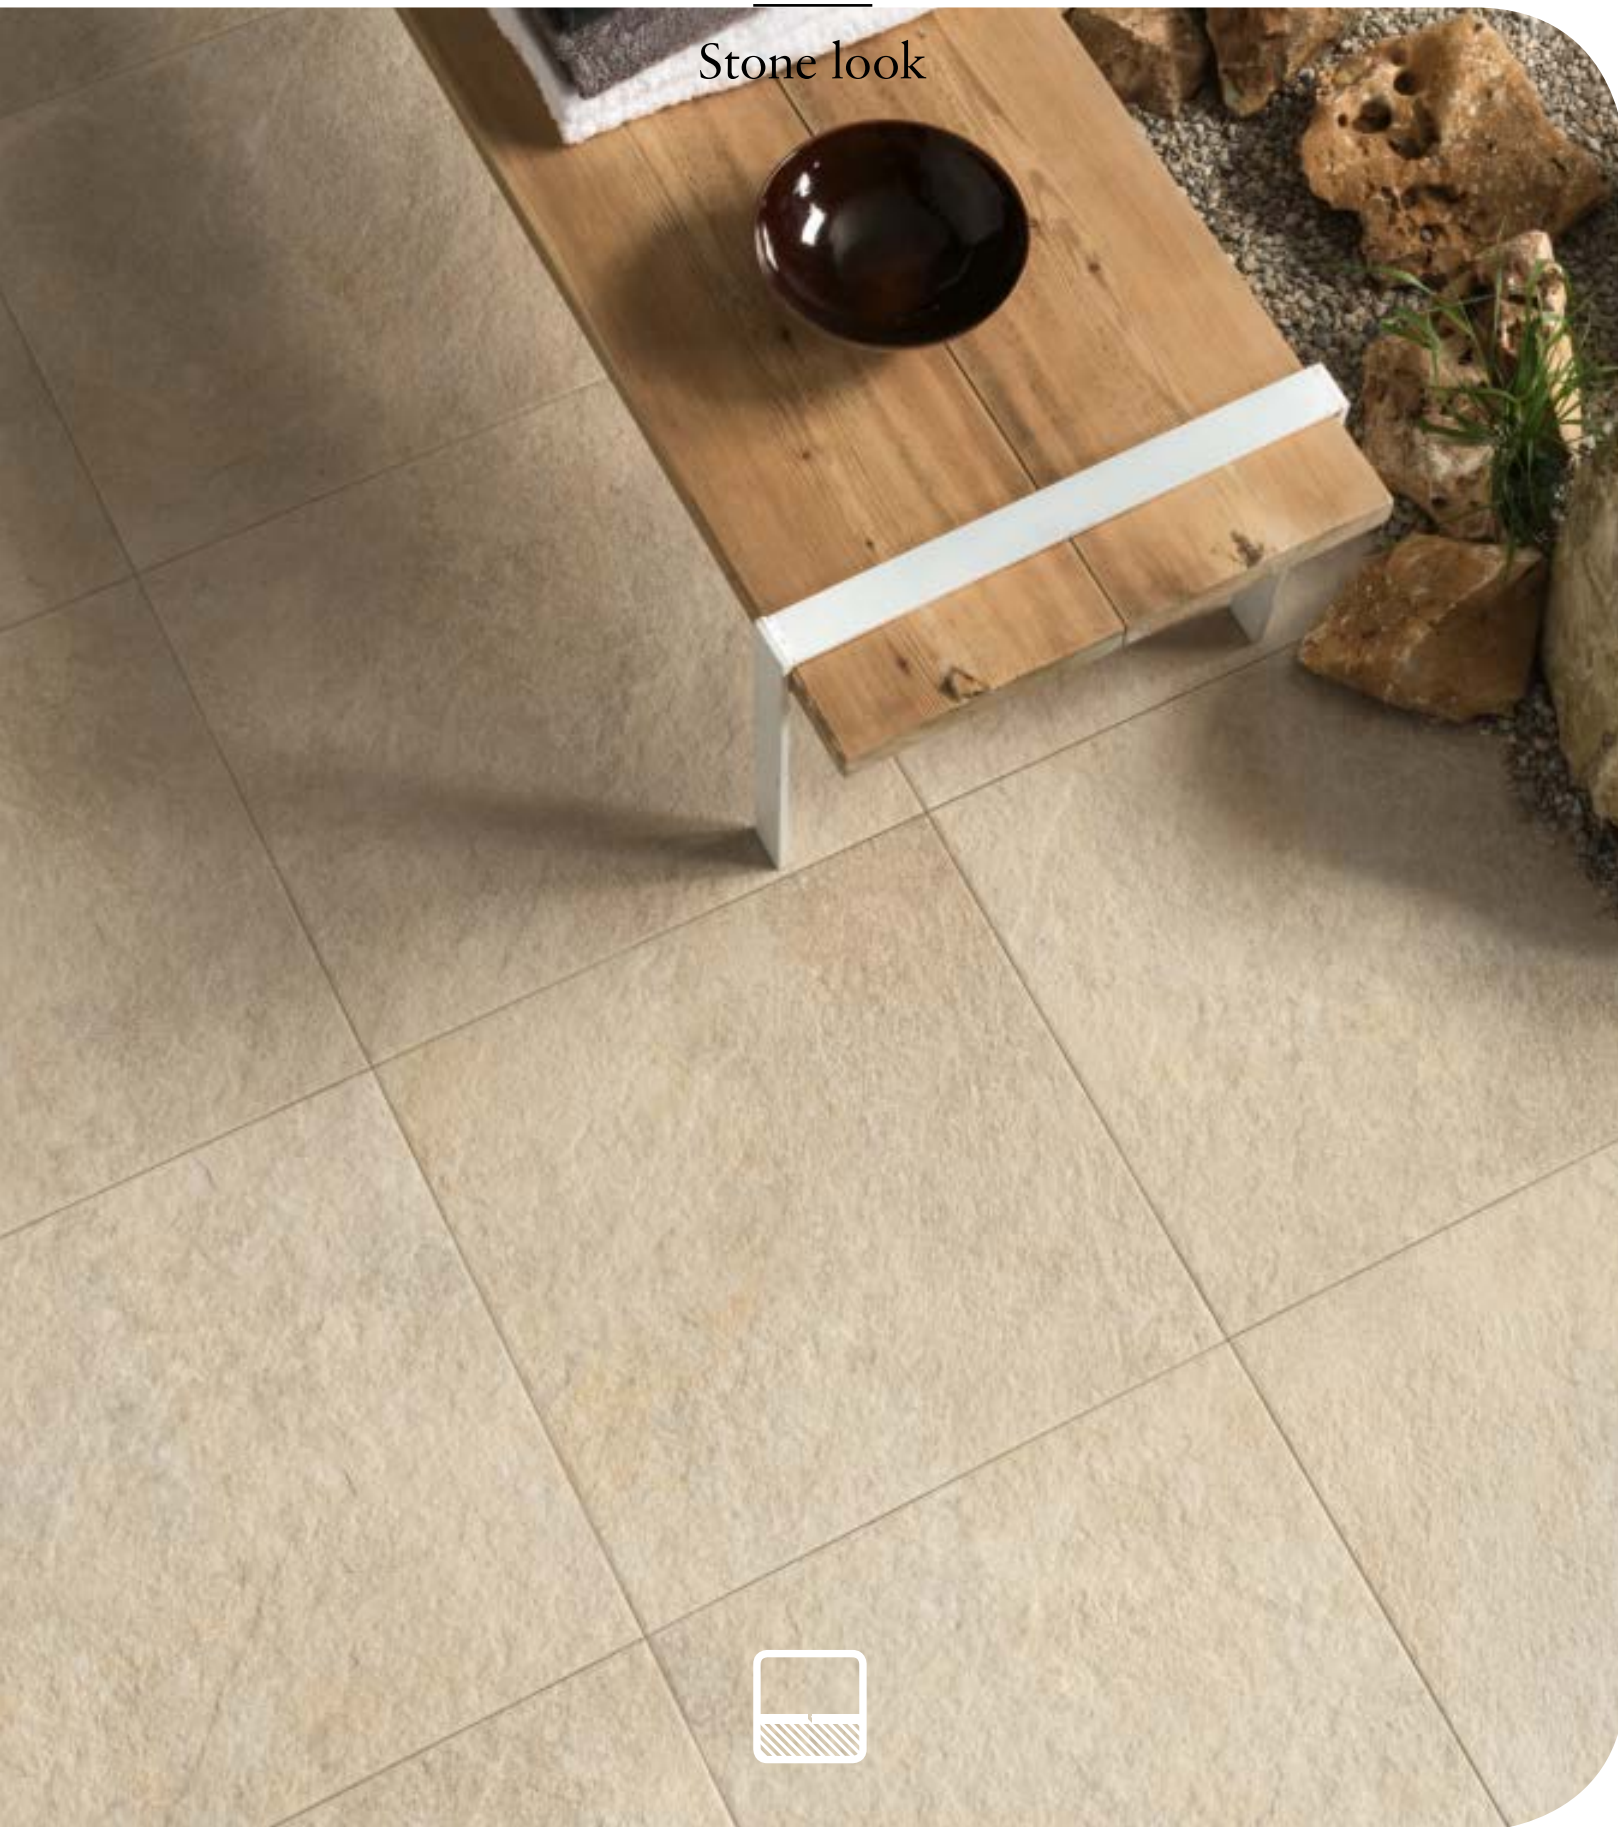

24"x24" GEA


AEXTRA20



12"x24" ROUND GEA / 12"x24" ROUND CORNERS GEA / 24"x24" GEA

ROVERE

Wood look

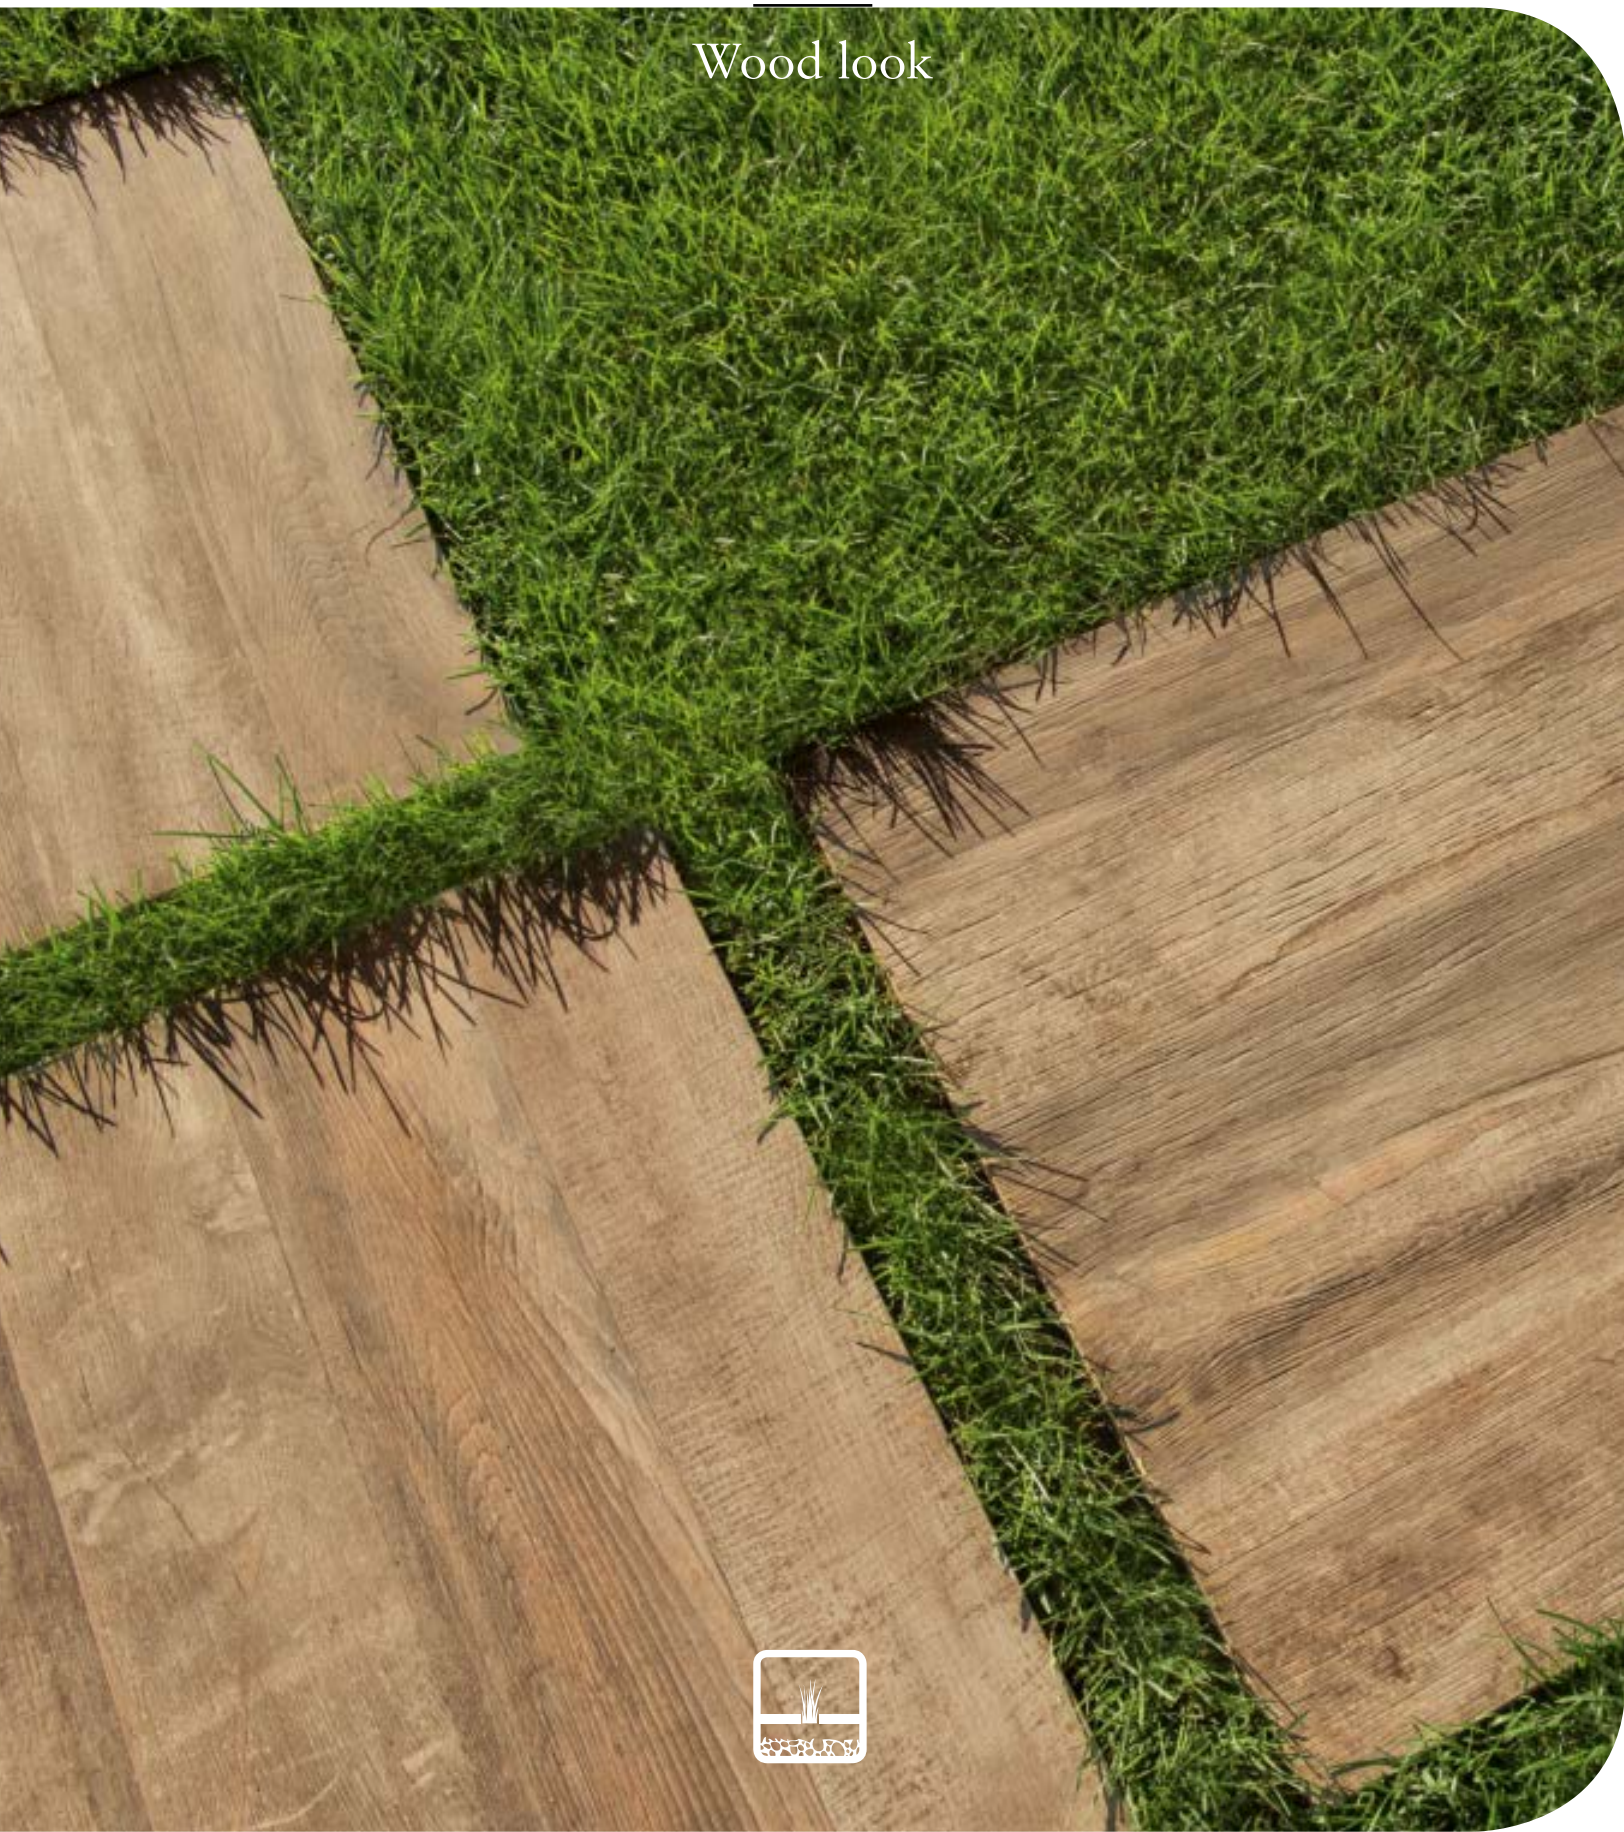

24"x24" ROVERE

GRAUSTEIN

A E X T R A 2 0

Stone look



24"x24" GRAUSTEIN

CINDER

Wood look




24"x24" CINDER

RIMINI

A E X T R A 2 0

Terrazzo look

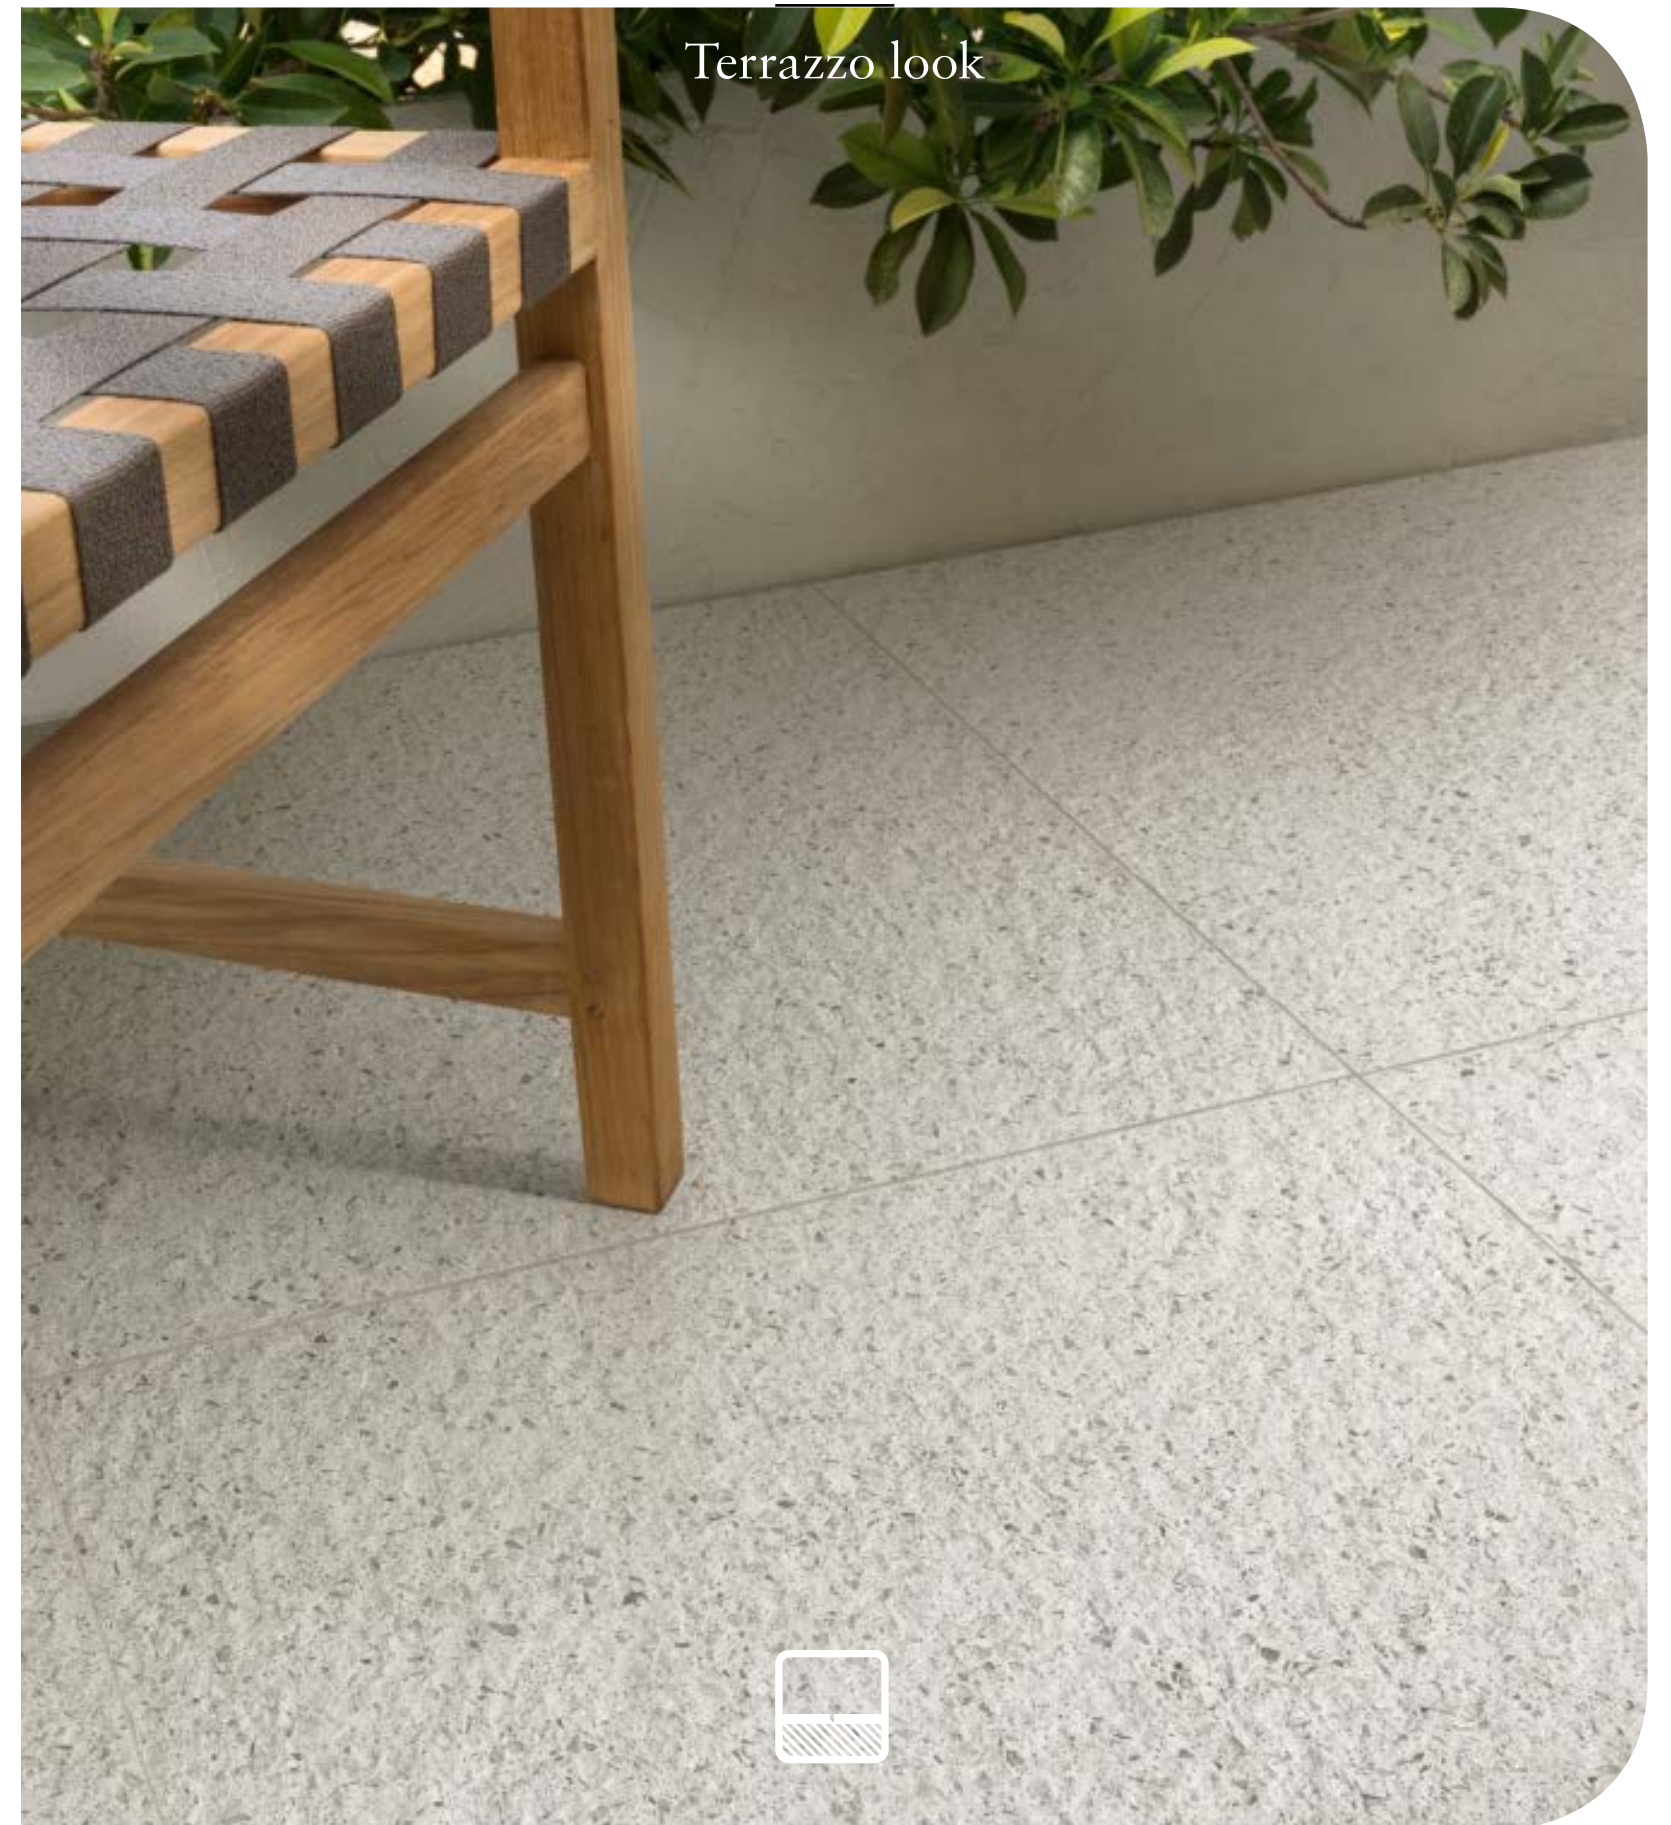

24"x24" RIMINI

24”x24”
Rectified

Stone look

TITANIO

V2



GEA

V2



GRAUSTEIN

V1



Residential
Residencial



Commercial
Comercial



Porcelain
Stoneware
Gres
porcelánico



Floor
Pavimento



DCOF
compliant
Conforme
DCOF



Thickness
3/4"
Espesor
3/4"



Rectified Tile
Baldosa
rectificada



NO V.O.C.
Sin C.O.V.



Frost Proof
Resistencia
a las heladas



Low water
absorption
(<0,5%)
Baja absorción
de agua
(<0,5%)



Made in USA
Fabricado en
EE.UU.

Wood look

ROVERE

V3



CINDER

V3



Terrazzo look

RIMINI

V1



TRIMS

PIEZAS ESPECIALES

Available in all the Aextra20 colors
Disponibles en todos los colores Aextra20



12"x24" XSTEP



12"x24" XSTEP INTERNAL CORNER




12"x24" XSTEP EXTERNAL CORNER



12"x24" ROUND



12"x24" ROUND INTERNAL CORNER

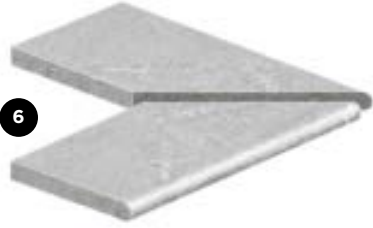

12"x24" ROUND EXTERNAL CORNER



12"x24" XGRIP



12"x24" XGRIP INTERNAL CORNER



12"x24" XGRIP EXTERNAL CORNER



6"x24" RISER



6"x24" POOL GRID



6"x24" POOL GRID CORNERS



12"x24" TOP



12"x24" TOP END

A E X T R A 2 0



Residential
Residencial



Commercial
Comercial



Porcelain
Stoneware
Gres
porcelánico



Floor
Pavimento



DCOF
compliant
Conforme
DCOF



Thickness
3/4"
Espesor
3/4"



Rectified Tile
Baldosa
rectificada



NO V.O.C
Sin C.O.V.



Frost Proof
Resistencia
a las heladas



Low water
absorption
(<0,5%)
Baja absorción
de agua
(<0,5%)



Made in USA
Fabricado en
EE.UU.

COLOR-BODY PORCELAIN TILES - RECTIFIED, ONE CALIBER
Colored-body porcelain stoneware tiles are produced minimizing the color difference between the glaze and the body. Nevertheless, the design is visible only on the surface.



24"x24"
610x610 MM

Titanio	●
Gea	●
Graustein	●
Rovere	●
Cinder	●
Rimini	●

● Matte, Rectified, One caliber

TRIMS Available in all colors
PIEZAS ESPECIALES Disponibles en todos los colores

PACKAGING

SIZE INCHES	MM	BOX					PALLET				
		PCS	SURFACE (SQF)	SURFACE (SQM)	WEIGHT (LBS)	WEIGHT (KG)	BOXES	SURFACE (SQF)	SURFACE (SQM)	WEIGHT (LBS)	WEIGHT (KG)
24"x24"	610x610	2	7.75	0.72	~70.54	~31.9968	30	232.50	21.60	~2,116.20	~959.904

For information about installation and cleaning of Caesar products, please consult our general catalogue or the website www.caesarceramicsusa.com.
Color reproductions may vary from actual products.
Caesar reserves the right to modify the products illustrated in this catalogue for reasons of production or to improve quality. Samples are purely indicative. Packaging and weights may vary for production reasons. Contact our sales department when ordering.
In case of running pattern installation, Caesar recommends a maximum 33% offset.
Caesar warrants that our products meet or exceed the requirements of ANSI, specification ANSI A137.1: 2012, as shown in our Tile Performance Data sheets.

Para información sobre la colocación y la limpieza de los productos Caesar, consultar nuestro catálogo general o la página web www.caesarceramicsusa.com.
La reproducción del color puede variar respecto de los productos reales.
Caesar se reserva la facultad de modificar los productos ilustrados en este catálogo por razones de producción o para mejorar la calidad.
Las muestras son puramente indicativas. El empaquetado y los pesos pueden variar por razones de producción. Contacta con nuestro departamento de ventas cuando realices tu pedido.
En caso de colocación escalonada Caesar recomienda un desfase máximo del 33%.
Caesar garantiza la conformidad de sus productos con los requisitos ANSI, especificación ANSI A137.1: 2012, como se muestra en las fichas de datos de prestación de las baldosas.

If the application of the 3/4" inch (20 mm) slabs foresees the ceramic product used in structural installations, the project engineer and/or customer must carefully assess the project requirements with regard to the technical specifications of the slabs. To prevent the risk of damage or injury, the manufacturer recommends:

- With regard to a raised floor installation a ceramic slab may fracture on impact if a heavy object falls on it from any significant height. Therefore the manufacturer recommends to check the specific intended use before starting the installation and to follow table for raised installation provided below.
In certain conditions, reinforcing must be applied on the back of the slabs (double glass fibre net or a galvanized steel sheet) supplied and applied by the manufacturer;
- With reference to any dry installation system of flooring above the ground level, the manufacturer recommends to comply with local regulations and conditions of use with regard to wind-load, loadbearing, seismic events, etc. Failure to comply with these recommendations may lead to improper use of the product and could cause serious damage or injury.

Cuando la aplicación de las baldosas de 20 mm prevé el uso del producto cerámico en términos estructurales, se recomienda al proyectista o cliente una atenta evaluación de los requisitos del proyecto con respecto a las características técnicas de las baldosas. En particular, para evitar daños materiales y lesiones personales el fabricante recomienda:

- Si la aplicación prevé la colocación sobreelevada, teniendo en cuenta que una baldosa podría romperse al caer sobre ella un cuerpo pesado, verificar por anticipado el uso específico previsto y atenerse a la tabla de instrucciones de colocación sobreelevada que aparece a continuación; en determinadas condiciones, está prevista la aplicación de un refuerzo suministrado por el fabricante (doble red de fibra de vidrio u hoja de acero galvanizado) a la cara posterior de la baldosa;
- Con respecto a la pavimentación colocada en altitud, con cualquier sistema de colocación en seco, respetar las normas específicas y las condiciones de uso locales que conciernen, entre otras cosas, a la acción del viento, la carga estructural, las acciones sísmicas, etc.; El incumplimiento de las recomendaciones siguientes puede llevar a un uso inadecuado del producto y causar eventualmente daños graves a personas y bienes.

INSTRUCTIONS FOR RAISED FLOOR INSTALLATION
INSTRUCCIONES PARA LA INSTALACIÓN DE PAVIMENTOS SOBREELEVADOS

	RAISE OF THE FOOT PLAN / ALTURA DEL PLANO DE TRÁNSITO	
Size / Formato	Up to 3/4 inch / Hasta 3/4 pies	Above 3/4 inch / Más de 3/4 pies
Size 24"x24" / Formato 24"x24"	4 supports/slab (0,32 supports/sqf - 3,4 supports/m²)	Please contact Ceramiche Caesar (Caesartech dept.)
	4 soportes/baldosa (0,32 soportes/sqf - 3,4 soportes/m²)	Contactar con Ceramiche Caesar (oficina Caesartech)



Very Uniform appearance.
Pieces of the same shade value are very uniform and smooth in texture. They can be measured for small color differences and are in compliance with the color uniformity requirements of tables 6-10 (ANSI A137.1-2012)



Uniform Appearance.
Differences among pieces from the same production run are minimal.



Slight Variation.
Clearly distinguishable texture and/or pattern within similar colors.



Moderate Variation.
While the colors and/or textures present on a single piece of tile will be indicative of the colors and/or texture to be expected on the other tiles, the amount of colors and/or texture on each piece may vary significantly. It is recommended that the range be viewed before selection.



Substantial Variation.
Random color and/or texture differences from tile to tile, so that one tile may have totally different colors and/or textures from that on other tiles. Thus, the final installation will be unique. It is recommended that the range be viewed before selection.

A E X T R A 2 0



SUSTAINABLE MIND

ENFOQUE SOSTENIBLE



Maximum concern for the environment
Máximo cuidado del medio ambiente



From our plant

The **brand new production facilities** in the USA are built in compliance with the most stringent standards in term of environmental protection, safety of workers and reduction of energy consumption.

De Nuestra Planta...

Las **nuevas plantas de producción** en Estados Unidos están construidas de conformidad con las más estrictas normas de protección medioambiental, seguridad de los trabajadores y reducción del consumo de energía.



to your project.

By choosing Caesar Ceramics USA, the end user will be sure to purchase **durable, safe and green floor and wall tiles**: being extremely durable, they do not call for any chemical treatment, varnish or special detergent. They do not release dust or other substances, even when subject to high pedestrian traffic.

a tu proyecto

Al elegir Caesar Ceramics USA, el usuario final tendrá la seguridad de estar adquiriendo **baldosas para pisos y revestimientos durables, seguras y ecológicas**: como nuestras baldosas son muy durables, no necesitan tratamientos químicos, pintura ni detergentes especiales. No desprenden polvos u otras sustancias por más que se sometan a un alto tráfico peatonal.



HPD
(Health Product Declaration®)

The Health Product Declaration (HPD) Open Standard provides for the disclosure of product contents and potential associated human and environmental health hazards.

By means of its declaration, Caesar USA adheres to the standard.

La norma abierta relativa a la Declaración de Producto Saludable (Health Product Declaration - HPD) indica el contenido del producto y los respectivos riesgos para la salud humana y medioambiental. **Con esta declaración Caesar USA adhiere a la norma.**



LEED
(Leadership in Energy and Environmental Design)

Caesar Ceramics USA is a member of US Green Building Council (USGBC).

The LEED program, promoted by the USGBC, is the most widely used green building rating system in the world. Available for virtually all building, community and home project types, LEED provides a framework to create healthy, highly efficient and cost-saving green buildings.

Caesar Ceramics USA es miembro del US Green Building Council (USGBC).

El programa LEED, promovido por el USGBC, es el sistema de clasificación de construcción ecológica de mayor difusión mundial. Disponible prácticamente para todos los proyectos de edificios, condominios y hogares, LEED proporciona un criterio para la creación de construcciones ecológicas, saludables, de alta eficiencia y bajos consumos.



TILE PERFORMANCE DATA

TILE PERFORMANCE DATA

COLORED-BODY PORCELAIN TILES - RECTIFIED Classification in accordance with ANSI A137.1: 2012 (P1 class).
BALDOSAS DE GRES PORCELÁNICO COLOREADO EN MASA Clasificación según ANSI A137.1: 2012 (P1 class).

	TECHNICAL FEATURE	ASTM	VALUE REQUIRED ANSI A 137.1-2012	CAESAR AVERAGE VALUE
	Facial dimension Medidas de la cara	ASTM C-499	± 0,25% or ± 0,03 in	In accordance to ANSI A 137.1-2012 Conforme a ANSI A 137.1-2012
	Wedging Efecto trapecio	ASTM C-502	±0,25% or ±0,03 in	
	Warpage diagonal Abarquillamiento diagonal	ASTM C-485	± 0,4% or ± 0,07 in	
	Warpage edge Abarquillamiento de los cantos	ASTM C-485	±0,4% or ±0,05 in	
	Thickness Espesor	ASTM C-499	0,040 inch max (1 mm)	In accordance to ANSI A 137.1-2012
	Water absorption Absorción de agua	ASTM C-373	≤ 0,5%	Passed "impervious tiles" Class P1 Supera la prueba "baldosas impermeables" Clase P1
	Breaking strength Resistencia a la rotura	ASTM C-648	≥ 250 lbs (≥ 1113 N)	≥ 3000 lbs
	Freeze thaw Heladas/Deshielo	ASTM C-1026	No damages Ningún daño	In accordance Conforme
	Chemical resistance Resistencia química	ASTM C-650	As reported Según lo indicado	Unaffected Inalterado
	MOHS hardness Dureza MOHS			6
	Dynamic coefficient of friction*		0,42	In accordance Conforme

Average values referred to the last two years of production and related to the matt finish of the product.
Values relate to the matt finish of the product and to tests carried out by certified external laboratories, whose results are available upon request. Be sure to use the same caliber tiles. Color reproductions may vary from actual products.
* Due to the intrinsic nature of porcelain stoneware tiles, please note that the coefficient of friction may vary within the same production lot or from one production lot to the other. Caesar products can become slippery when wet. We recommend to always keep the surface dry.
In case of running pattern installation, Caesar recommends a maximum 33% offset.

PORCELAIN STONEWARE
Color reproductions may vary from actual products.
Caesar reserves the right to modify the products illustrated in this catalogue for reasons of production or to improve quality.
Samples are purely indicative. Packaging and weights may vary for production reasons. Contact our sales department when ordering.
Caesar warrants that our products meet or exceed the requirements of ANSI, specification ANSI A137.1: 2012, as shown in our Tile Performance Data sheets.
The Caesar complete terms and conditions of sale (including limited warranty) are specified in the price list.
Should you need further information, please contact our sales department.

Valores medios referidos a los últimos dos años de producción y al producto con acabado natural. Los valores se refieren al acabado natural del producto y a pruebas realizadas por laboratorios externos calificados. Los resultados están disponibles y se pueden solicitar. Asegurarse de utilizar baldosas del mismo calibre. Las reproducciones de los colores pueden no coincidir exactamente con los colores reales del producto.
* Dadas las características intrínsecas del gres porcelánico, se ruega notar que el coeficiente de rozamiento puede variar de un lote a otro. Los productos Caesar pueden resultar resbaladizos si están mojados. Se recomienda mantener las superficies siempre secas.
En caso de adoptar la colocación escalonada, Caesar recomienda no escalonar más del 33%.

GRES PORCELÁNICO
Las reproducciones de los colores pueden no coincidir exactamente con los colores reales del producto.
Caesar se reserva el derecho de modificar los productos ilustrados en este catálogo por motivos ligados a la producción y al objetivo de mejorar la calidad.
Las muestras son indicativas. Los embalajes y los pesos pueden variar por motivos ligados a la producción. En el momento del pedido contactar con nuestra oficina de ventas.
Caesar garantiza que sus productos son conformes o superiores a los requisitos de las normas ANSI, especificaciones ANSI A137.1: 2012, como se indica en las tablas técnicas de las baldosas.
Los términos y las condiciones de venta completos de Caesar (incluidas las indicaciones sobre la garantía limitada) figuran en la lista de precios.
Para más información contactar con nuestra oficina de ventas.

A E X T R A 2 0

PORCELAIN TILE PAVERS
BALDOSAS DE GRES PORCELÁNICO

WARNING

Outdoor pavings installed unglued above the ground level are subject to the action of the wind, with the risk, in some cases, of becoming airborne.
The manufacturer recommends to require the assistance of a qualified professional in order to check the suitability of the installation system above the ground adopted, in accordance with the local laws and regulations and the conditions of use. Failure to do so could result in serious injury or property damage.
A ceramic slab installed on a raised pedestal system may fracture on impact if a heavy object is dropped onto it from a height, with a risk of injury to anyone standing or walking on such slab. Failure to adhere to the manufacturer's instructions for installation of slabs on raised pedestal systems may result in serious injury.
For further information and recommendations concerning the installation systems please refer to **www.caesarceramicsusa.com** website.

ATENCION


Las pavimentaciones exteriores colocadas en seco en altitud están sujetas a la acción del viento, con el consiguiente riesgo de levantamiento de las baldosas.
El fabricante recomienda hacer verificar la idoneidad del sistema de colocación en altitud a un técnico habilitado en base a la normativa local vigente y a las condiciones de uso, con el fin de evitar el riesgo de daños a personas y bienes.
Una baldosa cerámica colocada sobre un sistema sobreelevado puede romperse al caer sobre ella un objeto pesado desde cierta altura, con el consiguiente riesgo de lesiones graves para quienes estén pasando o se encuentren de pie sobre ella.
El incumplimiento de las instrucciones del fabricante para la colocación sobre sistemas sobreelevados puede ocasionar lesiones graves.
Para más información y recomendaciones de colocación visitar nuestro sitio **www.caesarceramicsusa.com**.

A E X T R A 2 0

PORCELAIN TILE PAVERS
BALDOSAS DE GRES PORCELÁNICO

◆ CÆSAR ◆
CERAMICS USA

CAESAR CERAMICS USA INC.
500 Wilson Pike Cir, Ste 127
Brentwood TN 37027-3261

MADE IN USA

DESIGNED IN ITALY

caesarceramicsusa.com