

Bambusa | Porcelain



AVAILABLE SIZES



Basketweave
Mosaic on
12x12 sheet

Losango
Mosaic on
12x12 sheet

12x24 Fascia
Texture

12x24


24x24

2.5x24 Bullnose

DESCRIPTION

Bambusa is a porcelain tile series that offers a unique modern textured tile look. This elegant porcelain series works for both floor tile and wall tile applications, offering a one-of-a-kind interpretation of grass, jute, sisal and bamboo surfaces on a linear tile design and across multiple decorative tile options. Available in over nine porcelain tile sizes and two mosaic tile options, Bambusa comes in six stunning colors with just the right amount of range and tone. Bambusa is rated PEI 4 for all residential and light commercial applications.

COLORS

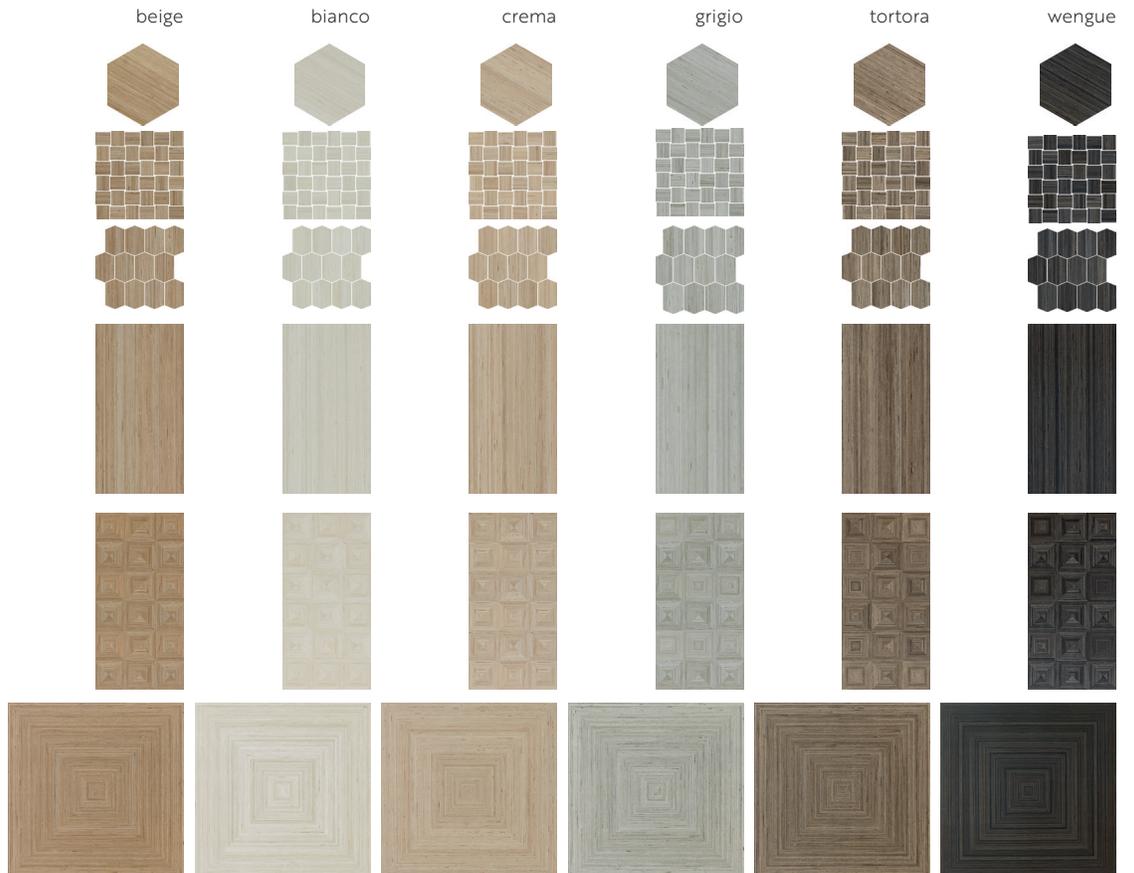

TECHNICAL INFORMATION

TILE SIZES

Nominal	Shape	Finish	Thickness	Availability
8 x 8		Matte	10 mm	☺
9.5 x 11 Hexagon		Matte	10 mm	✓
12 x 24 Rectified		Matte	10 mm	✓
12 x 24 Fascia Textured Rect.		Matte	10 mm	✓
24 x 24 Rectified		Matte	10 mm	☺
24 x 24 Intarsio Rectified		Matte	10 mm	✓
12 x 48 Rectified		Matte	10 mm	☺
24 x 48 Rectified		Matte	10 mm	☺
48 x 48 Rectified		Matte	10 mm	☺
48 x 48 Intarsio Rectified		Matte	10 mm	☺
Basketweave Mosaic		Matte	10 mm	✓
Losanga Mosaic		Matte	10 mm	✓

COORDINATING TRIM

Nominal	Shape	Finish	Thickness	Availability
2.5 x 24 Bullnose		Matte	10 mm	✓

✓ Stock Item. ☺ Non-Stock Item. Requires Extra Lead Time.

PERFORMANCE DATA

CHARACTERISTIC	NORMS	RESULTS
Water Absorption	ISO 10545-3	0.10 %
Abrasion Resistance	ISO 10545-7	4
Breaking Strength	ISO 10545-4	≥ 55 N/mm ²
Dynamic Coefficient of Friction Wet	AcuTest	0.50
Dimensions Range	ISO 10545-2	Conforms
Frost Resistance	ISO 10545-12	Frost Proof
Chemical Resistance - Household Chemicals	ISO 10545-13	A-LA-HA
Chemical Resistance - Low Concentration of Acids	ISO 10545-13	A-LA-HA
Scratch Hardness	MOHS	8.5
Thermal Shock	ISO 10545-9	Resistant
Resistance to Stains	ISO 10545-14	Class 5

SHADE VARIATION



V2 - SLIGHT VARIATION
Clearly distinguishable differences in texture and/or pattern within similar colors.

WEAR CODE

4 - Rated for all residential and light commercial applications.

APPLICATIONS

	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL
FLOORS	✗	✗	
WALLS / BACKSPLASH	✗	✗	✗
POOL DECKING			
EXTERNAL USE - FROST PROOF	*	*	

✗ - Has been approved for this application.

* - Discuss proper installation method with your Sales Representative.

NOTES

It is not recommended to stagger any tile longer than 15" more than 1/3 the length of the tile.

Minimum Grout Joint Recommendation: 3/16" for 8x8 & Hexagon; 1/8" for all other sizes.

Always inspect materials prior to installation.

Always mix 2-3 cartons at a time while installing to insure the best blend.

All product images are representative only. Variation in color and shading is to be expected. Final selection should be made from actual tile samples.