


# Imperial Stone | Porcelain




## AVAILABLE SIZES



## DESCRIPTION





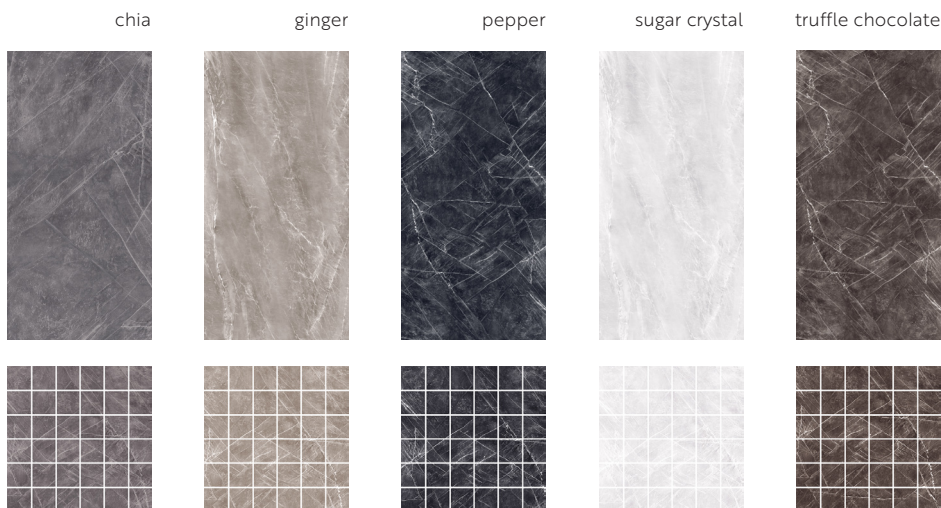



Imperial Stone is an American-made porcelain tile series offering one of the most unique stone tile looks for today's modern space. This color body porcelain tile series emphasizes an exciting white stone vein across five elegant colors with consistent tone range. Elegant white and grey tile options contrast with deep brown and black tile offerings across honed or semi-polished tile finishes. Imperial Stone is an extensive floor tile series that also comes with beautiful mosaic tile options to create unique designs for any residential or light commercial project.

## COLORS





# TECHNICAL INFORMATION

## TILE SIZES

Nominal	Shape	Finish	Thickness	Availability
12 x 24 Rectified		Lappato	8 mm	✓
12 x 24 Rectified		Honed	8 mm	✓
24 x 24 Rectified		Lappato	8 mm	⌚
24 x 24 Rectified		Honed	8 mm	⌚
20 x 24 Hexagon		Honed	8 mm	⌚
2 x 2 Mosaic		Honed	8 mm	✓
9 x 12 Index Mosaic		Honed	8 mm	⌚
10 x 12 Harmony Mosaic		Honed	8 mm	⌚

## COORDINATING TRIM

Nominal	Shape	Finish	Thickness	Availability
3 x 24 Bullnose		Matte	8 mm	✓
6 x 12 Cove Base		Matte	8 mm	⌚

✓ Stock Item. ⌚ Non-Stock Item. Requires Extra Lead Time.

## PERFORMANCE DATA

CHARACTERISTIC	NORMS	RESULTS
Water Absorption	ASTM C373	≤ 0.01 %
Abrasion Resistance	ASTM C1027	Class 3
Breaking Strength	ASTM C648	≥400 lbs
Bond Strength	ASTM C482	≥ 200 psi
Dynamic Coefficient of Friction Wet	AcuTest	≥ 0.42 (Honed)
Thickness Dimension	ASTM C499	In Accordance
Facial Dimension	ASTM C499	In Accordance
Warpage Diagonal	ASTM C485	In Accordance
Wedgling Average	ASTM C502	In Accordance
Frost Resistance	ASTM C-1026	Frost Proof
Chemical Resistance	ASTM C-650	Class A
Scratch Hardness	MOHS	≥ 7

## RECYCLED CONTENT



Contains 40% Pre-Consumer Recycled Content.  
6% of the Materials and Resources is Post-Consumer Recycled Glass.

## SHADE VARIATION



V2 - SLIGHT VARIATION  
Clearly distinguishable differences in texture and/or pattern within similar colors.

## WEAR CODE

4 - Rated for all residential and light commercial applications.

## APPLICATIONS

	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL
FLOORS	✗	✗	
WALLS / BACKSPLASH	✗	✗	✗
POOL DECKING	*	*	
EXTERNAL USE - FROST PROOF	*	*	

✗ - Has been approved for this application.

\* - Discuss proper installation method with your Sales Representative.

## NOTES

It is not recommended to stagger any tile longer than 15" more than 1/3 the length of the tile.

Minimum Grout Joint Recommendation: 3/16"

Always inspect materials prior to installation.

Always mix 2-3 cartons at a time while installing to insure the best blend.

All product images are representative only. Variation in color and shading is to be expected. Final selection should be made from actual tile samples.

