

Topography | Porcelain



AVAILABLE SIZES



4x24



12x24

2x2 Mosaic
on 12x12 sheet

Herringbone
Mosaic
on 13x13 sheet


Hexagon Mosaic
on 11x14 sheet

3x24 Bullnose

DESCRIPTION





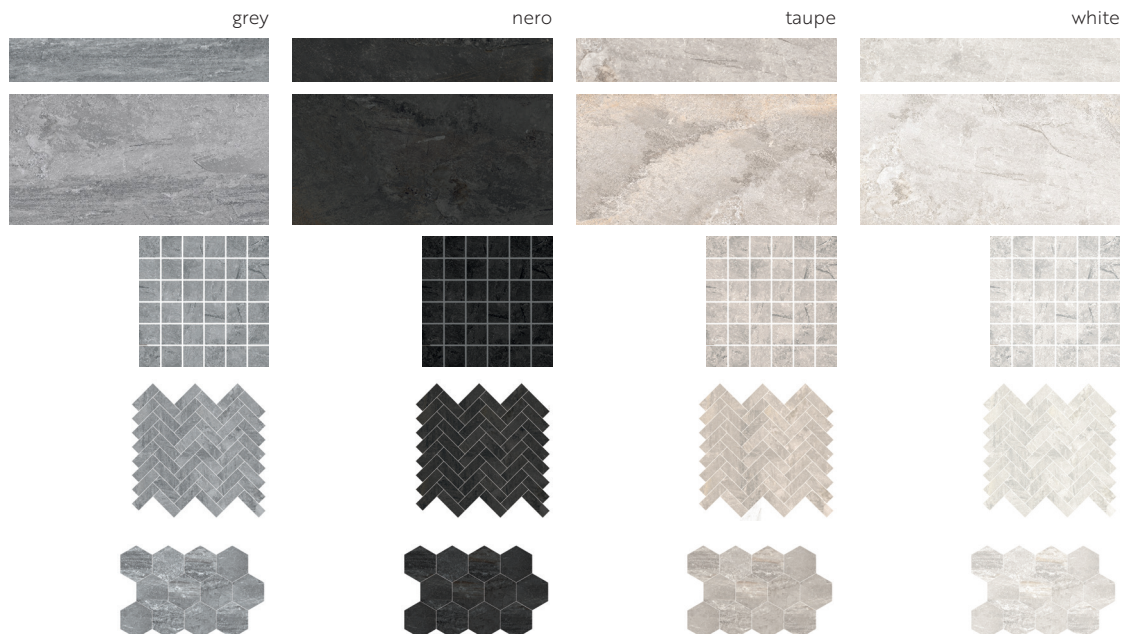


Topography is a colorbody technical Italian porcelain tile reflecting a contemporary interpretation of quartzite stone tile looks. This elegant, modern porcelain series works for both floor tile and wall tile applications, offering unique design-oriented rectangle tile sizes such as 4" x 24" and a beautiful selection of mosaic tile options, including hexagon tiles and herringbone tiles. Topography comes in four stunning colorways with just the right amount of range and tone.

COLORS




TECHNICAL INFORMATION

TILE SIZES

| Nominal | Shape | Finish | Thickness | Availability |
|--------------------|---|--------|-----------|--------------|
| 4 x 12 Rectified |  | Matte | 9 mm | 🔄 |
| 4 x 24 Rectified |  | Matte | 9 mm | ✓ |
| 12 x 24 Rectified |  | Matte | 9 mm | ✓ |
| 24 x 48 Rectified |  | Matte | 9 mm | 🔄 |
| 2x2 Mosaic |  | Matte | 9 mm | ✓ |
| Hexagon Mosaic |  | Matte | 9 mm | ✓ |
| Herringbone Mosaic |  | Matte | 9 mm | ✓ |

✓ Stock Item. 🔄 Non-Stock Item. Requires Extra Lead Time.


COORDINATING TRIM

| Nominal | Shape | Finish | Thickness | Availability |
|-----------------|---|--------|-----------|--------------|
| 3 x 24 Bullnose |  | Matte | 9 mm | ✓ |

PERFORMANCE DATA

| CHARACTERISTIC | NORMS | RESULTS |
|--|--------------|-------------|
| Water Absorption | ISO 10545-3 | ≤ 0.05 % |
| Abrasion Resistance (Glazed) | ISO 10545-7 | 4 / 5 |
| Breaking Strength | ISO 10545-4 | ≥ 35 N/mm2 |
| Dynamic Coefficient of Friction Wet | AcuTest | ≥ 0.42 |
| Dimensions Range | ISO 10545-2 | Conforms |
| Frost Resistance | ISO 10545-12 | Frost Proof |
| Chemical Resistance - Household Chemicals | ISO 10545-13 | GA |
| Chemical Resistance - Low Concentration of Acids | ISO 10545-13 | GA |
| Thermal Shock Resistance | ISO 10545-9 | Resistant |
| Resistance to Stains | ISO 10545-14 | Class 5 |
| Crazing Resistance of Glazed Tiles | ISO 10545-11 | Resistant |

SHADE VARIATION



V3 - MODERATE VARIATION

While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece may vary significantly. For example "that little bit of color" on one piece of tile may be the primary color on the next piece.

WEAR CODE

White: 5 - Rated for all residential and commercial applications.
All Other Colors: 4 - Rated for all residential and light commercial applications.

APPLICATIONS

| | RESIDENTIAL | LIGHT COMMERCIAL | COMMERCIAL |
|----------------------------|-------------|------------------|-------------------|
| FLOORS | ✗ | ✗ | ✗ (White Only) |
| WALLS / BACKSPLASH | ✗ | ✗ | ✗ |
| POOL DECKING | * | * | |
| EXTERNAL USE - FROST PROOF | * | * | |

✗ - Has been approved for this application.
* - Discuss proper installation method with your Sales Representative.

NOTES

It is not recommended to stagger any tile longer than 15" more than 1/3 the length of the tile.

Minimum Grout Joint Recommendation: 1/8"

Always inspect materials prior to installation.

Always mix 2-3 cartons at a time while installing to insure the best blend.

All product images are representative only. Variation in color and shading is to be expected. Final selection should be made from actual tile samples.