


# Glacier Lake | Porcelain




## AVAILABLE SIZES



## DESCRIPTION

Glacier Lake Italian porcelain tile is a unique interpretation of glass tile, glass block and glass surface applications. A 4" x 12" glossy rectangular tile is brought to life with seven vibrant colors: White, Grey, Taupe, Black, Green, Light Blue and Cobalt Blue. A decorative 4" x 12" tile "Groove" presents horizontal ridges in all colors. The series is rounded out with a 4" x 12" and 12" x 24" matte porcelain tile in white, grey, taupe and black for coordinating floor tile applications. Glacier Lake porcelain is rated for applications ranging from Residential to Light Commercial, depending on color. An innovative Italian porcelain tile series whose creative evolution of glazes and finishes brings the look of glass surfaces to life in a unique, modern vibe.


## GROOVE GLOSSY COLORS

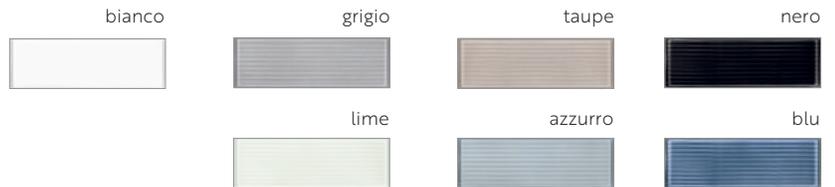

## BLOCK GLOSSY COLORS



## BLOCK MATTE COLORS

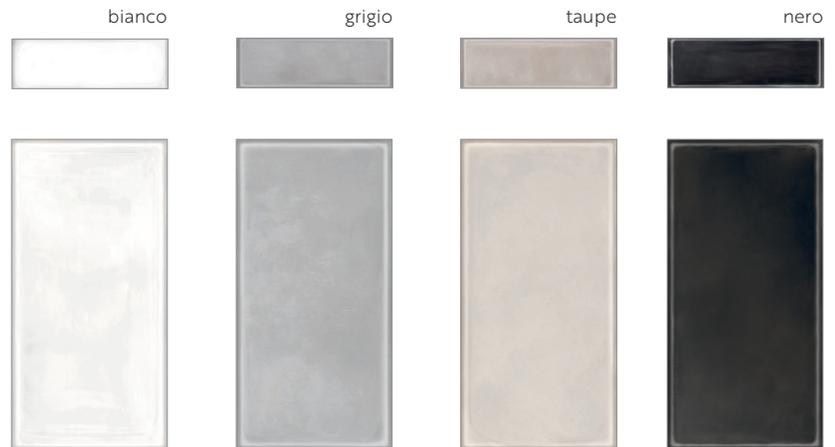

# TECHNICAL INFORMATION

## TILE SIZES

Nominal	Shape	Finish	Thickness	Availability
4 x 12 Groove		Glossy	10 mm	✓
4 x 12 Block		Glossy	10 mm	✓
4 x 12 Block		Matte	10 mm	✓
12 x 24 Block		Matte	10 mm	✓

## COORDINATING TRIM

Nominal	Shape	Finish	Thickness	Availability
.8 x 12 Quarter Round		Glossy	10 mm	✓
.8 x 12 Quarter Round		Matte	10 mm	✓

✓ Stock Item. ◻ Non-Stock Item. Requires Extra Lead Time.

## PERFORMANCE DATA

CHARACTERISTIC	NORMS	RESULTS
Water Absorption	ISO 10545-3	≤ 0.5 %
Abrasion Resistance	ISO 10545-7	2 / 3 / 4
Breaking Strength	ISO 10545-4	≥ 35 N/mm <sup>2</sup>
Dynamic Coefficient of Friction	AcuTest	0.51 (Matte)
Dimensions Range	ISO 10545-2	Conforms
Frost Resistance	ISO 10545-12	Frost Proof
Chemical Resistance - Household Chemicals	ISO 10545-13	Min Class 3
Chemical Resistance -Low Concentration of Acids and Bases	ISO 10545-13	Min Class 3
Thermal Shock Resistance	ISO 10545-9	Resists
Resistance to Stains	ISO 10545-14	Min Class 3
Crazing Resistance of Glazed Tiles	ISO 10545-11	Resistant

## SHADE VARIATION



### V2 - SLIGHT VARIATION

Clearly distinguishable differences in texture and/or pattern within similar colors.

## WEAR CODE

Azzurro Glossy / Bianco Glossy & Matte / Lime Glossy / Grigio Matte / Taupe Glossy & Matte: 4 - Rated for all residential and light commercial applications

Grigio Glossy / Nero Matte: 3 - Rated for all residential applications

Blu Glossy / Nero Glossy: 2 - Rated for light residential applications

## APPLICATIONS

	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL
FLOORS	✗	✗ (Glossy: Bianco, Lime, Taupe, Azzurro; Matte: Bianco, Grigio, Taupe)	
WALLS / BACKSPLASH	✗	✗	✗
POOL DECKING	*	* (Matte: Bianco, Grigio, Taupe)	
EXTERNAL USE - FROST PROOF	*	* (Matte: Bianco, Grigio, Taupe)	

✗ - Has been approved for this application.

\* - Discuss proper installation method with your Sales Representative.

## NOTES

It is not recommended to stagger any tile longer than 15" more than 1/3 the length of the tile.

Minimum Grout Joint Recommendation: 3/16"

Always inspect materials prior to installation.

Always mix 2-3 cartons at a time while installing to insure the best blend.

All product images are representative only. Variation in color and shading is to be expected. Final selection should be made from actual tile samples.