





AVAILABLE SIZES



DESCRIPTION





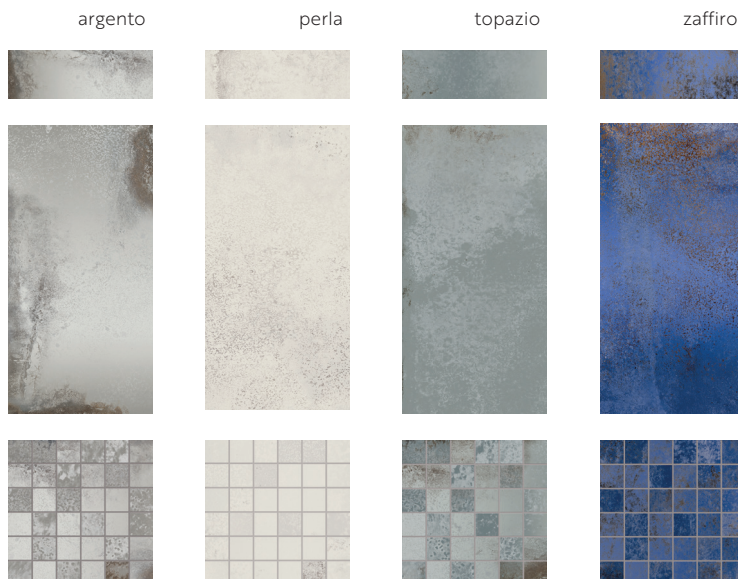



Reflections is a glazed Italian porcelain tile that imitates antiqued mirror glass tiles, alongside transformative contemporary tile effects such as oxidization. The series comes in 4" x 12" and 12" x 24" rectangular tile formats in both polished tile and matte tile finishes. A 2" x 2" mesh-mounted mosaic tile is also available. Reflections porcelain tile offers four bold colorways: White (Perla), Grey (Argento), Cobalt Blue (Zaffiro) and Aqua Green (Topazio). Reflections Perla and Argento are rated PEI 5 for all Residential and Commercial applications. Zaffiro and Topazio are rated PEI 4 for all Residential and Light Commercial applications. With Reflections, your room presents a striking visual impact with a tactile effect – you will want to touch the tile to get a sense of its depth!

COLORS




TECHNICAL INFORMATION

TILE SIZES

Nominal	Shape	Finish	Thickness	Availability
4 x 12 Rectified		Matte/ Polished	10 mm	✓
6 x 24 Rectified		Matte/ Polished	10 mm	⌚
12 x 12 Gemma Deco Rectified		Polished	10 mm	⌚
12 x 24 Rectified		Matte/ Polished	10 mm	✓
24 x 24 Rectified		Matte	10 mm	⌚
8 x 48 Frammenti Rectified		Polished	10 mm	⌚
24 x 48 Frammenti Rectified		Polished	10 mm	⌚
2 x 2 Mosaic		Matte	10 mm	✓

COORDINATING TRIM

Nominal	Shape	Finish	Thickness	Availability
3 x 24 Bullnose Rectified		Matte/ Polished	10 mm	✓
✓ Stock Item. ⌚ Non-Stock Item. Requires Extra Lead Time.				

PERFORMANCE DATA

Characteristic	Norms	Results
Water Absorption	ISO 10545-3	≤ 0.5 %
Abrasion Resistance	ISO 10545-7	4 / 5
Breaking Strength	ISO 10545-4	≥ 45 N/mm ²
Dynamic Coefficient of Friction Wet	AcuTest	≥ 0.50 (Natural)
Dimensions Range	10545-2	Conforms
Frost Resistance	ISO 10545-12	Frost Proof
Chemical Resistance - Household Chemicals	ISO 10545-13	A
Chemical Resistance - Low Concentration of Acids and Bases	ISO 10545-13	LA
Thermal Shock Resistance	ISO 10545-9	Conforms
Resistance to Stains	ISO 10545-14	Class 5
Crazing Resistance of Glazed Tiles	ISO 10545-11	Conforms

RECYCLED CONTENT



Contains 12% Pre-Consumer Recycled Content.

SHADE VARIATION



V3 - MODERATE VARIATION

While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece may vary significantly. For example "that little bit of color" on one piece of tile may be the primary color on the next piece.

WEAR CODE

Argento / Perla: 5 - Rated for all residential and commercial applications

Topazio / Zaffiro: 4 - Rated for all residential and light commercial applications

APPLICATIONS

	Residential	Light Commercial	Commercial
FLOORS	✗	✗	✗ (Argento & Perla Natural)
WALLS / BACKSPLASH	✗	✗	✗
POOL DECKING			
EXTERNAL USE - FROST PROOF			

✗ - Has been approved for this application.

* - Discuss proper installation method with your Sales Representative.

NOTES

It is not recommended to stagger any tile longer than 15" more than 1/3 the length of the tile.

Minimum Grout Joint Recommendation: 1/8"

Always inspect materials prior to installation.

Always mix 2-3 cartons at a time while installing to insure the best blend.

All product images are representative only. Variation in color and shading is to be expected. Final selection should be made from actual tile samples.

