





Pantheon Stone | Glazed Porcelain




AVAILABLE SIZES



DESCRIPTION



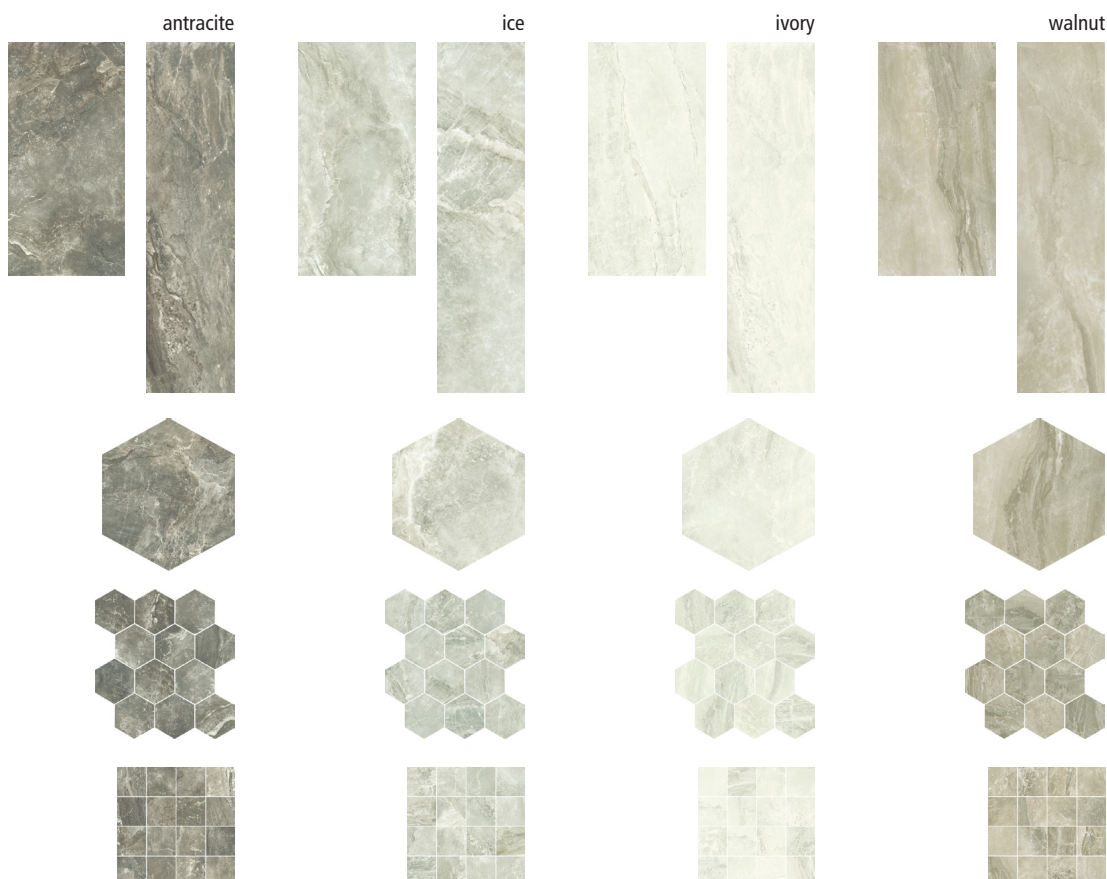


Pantheon Stone is a high quality Italian porcelain evoking the classic materials used in Roman architectural features. Showcasing an elegant breccia marble screen with light veining, Pantheon Stone is available in four beautiful colors and two standard tile formats, 12" x 24" and 9" x 36". Or, live up your space with a large 14" hexagon shape for a most impressive design. With coordinating mosaics and trim, all formats are suitable for residential and commercial applications.

COLORS




TECHNICAL INFORMATION

TILE SIZES

Nominal	Shape	Finish	Thickness
12 x 24		Matte	10 mm
9 x 36		Matte	10 mm
14 x 16 Hexagon		Matte	10 mm
4" Hexagon Mosaic		Matte	10 mm
3 x 3 Mosaic		Matte	10 mm


COORDINATING TRIM

Nominal	Shape	Finish	Thickness
3 x 24 Bullnose		Matte	10 mm

PERFORMANCE DATA

CHARACTERISTIC	NORMS	RESULTS
Water Absorption	ISO 10545-3	≤ 0.5 %
Deep Abrasion	ISO 10545-6	≤ 175 mm3
PEI Abrasion Resistance (Glazed)	ISO 10545-7	5
Breaking Strength	ISO 10545-4	> 35 N/mm2
Dynamic Coefficient of Friction Wet	C1028	0.65-0.68
Frost Resistance	ISO 10545-12	Frost Proof
Chemical Resistance - Household Chemicals	ISO 10545-13	Resistant
Chemical Resistance - Low Concentration of Acids and Bases	ISO 10545-13	Resistant
Scratch Hardness	MOHS	6
Thermal Shock Resistance	ISO 10545-9	Resistant
Resistance to Stains	ISO 10545-14	Class 5

SHADE VARIATION



V3 - MODERATE VARIATION

While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece may vary significantly. For example "that little bit of color" on one piece of tile may be the primary color on the next piece.

WEAR CODE

5 - Rated for all residential and commercial applications.

APPLICATIONS

	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL
FLOORS	✕	✕	✕
WALLS / BACKSPLASH	✕	✕	✕
POOL DECKING	*		
EXTERNAL USE - FROST PROOF	*		

✕ - Has been approved for this application.
* - Information is available upon request.

NOTES

It is not recommended to stagger any tile longer than 18" more than 1/3 the length of the tile.

Always inspect materials prior to installation.

Always mix 2-3 cartons at a time while installing to insure the best blend.

All product images are representative only. Variation in color and shading is to be expected. Final selection should be made from actual tile samples.