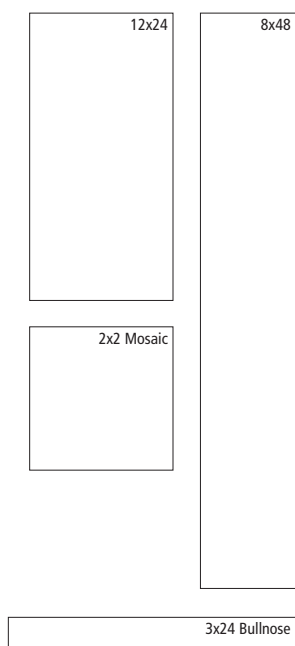


Residence | Glazed Porcelain



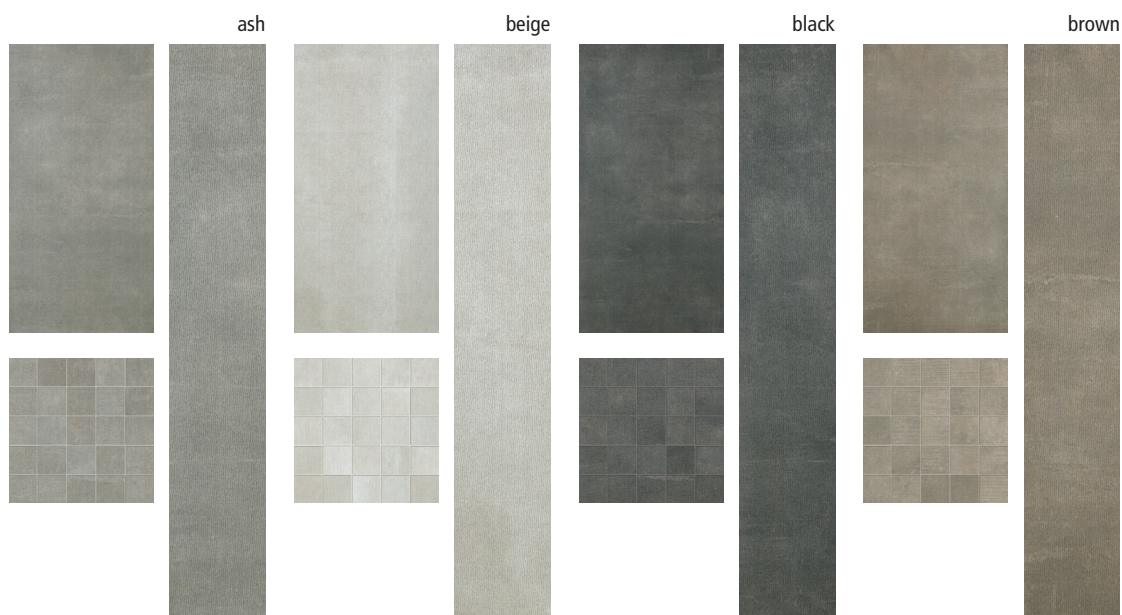
AVAILABLE SIZES



DESCRIPTION




Introducing Residence, a color-body porcelain with the modern design of textured linen on washed cement. The unique look is enhanced by contemporary shade tones across a palette of subtle, trending colors. Choose from a natural finish or an impressive semi-polished lappato finish in two rectangular formats, 12"x24" and 8"x48". A modern line that brings balanced warmth to any setting, Residence Italian porcelain is available in four colors, each with coordinating mosaic and trim, and is suitable for all residential and light commercial tile applications.

COLORS




TECHNICAL INFORMATION

TILE SIZES

Nominal	Shape	Finish	Thickness
12 x 24		Matte or Lappato	9 mm
8 x 48		Matte or Lappato	10 mm
2 x 2 Mosaic		Matte	9 mm

COORDINATING TRIM

Nominal	Shape	Finish	Thickness
3 x 24 Bullnose		Matte	9 mm

PERFORMANCE DATA

CHARACTERISTIC	NORMS	RESULTS
Water Absorption	ISO 10545-3	≤ 0.4 %
PEI Abrasion Resistance (Glazed)	ISO 10545-7	4
Breaking Strength	ISO 10545-4	> 1700 N
Dynamic Coefficient of Friction Wet	AcuTest	Matte - 0.66 Lappato - 0.32
Dimensions Range	ISO 10545-2	± 0.2 %
Frost Resistance	ISO 10545-12	Frost Proof
Chemical Resistance - Household Chemicals	ISO 10545-13	Resistant
Chemical Resistance - Low Concentration of Acids and Bases	ISO 10545-13	Resistant
Linear Thermal Expansion	ISO 10545-8	Conforms
Thermal Shock Resistance	ISO 10545-9	Guaranteed
Resistance to Stains	ISO 10545-14	Class 5

SHADE VARIATION



V3 - MODERATE VARIATION
While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece may vary significantly. For example "that little bit of color" on one piece of tile may be the primary color on the next piece.

WEAR CODE

4 - Rated for all residential and light commercial applications.

APPLICATIONS

	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL
FLOORS	✕	✕	
WALLS / BACKSPLASH	✕	✕	✕
POOL DECKING	*		
EXTERNAL USE - FROST PROOF	✕	*	

✕ - Has been approved for this application.
* - Information is available upon request.

NOTES

It is not recommended to stagger any tile longer than 18" more than 1/3 the length of the tile.

Always inspect materials prior to installation.

Always mix 2-3 cartons at a time while installing to insure the best blend.