



Watered Silk | Glazed Porcelain




AVAILABLE SIZES



DESCRIPTION

Watered Silk porcelain tile offers an elegant design boasting graceful tone-on-tone movement. Italian-made, this soothing color-body porcelain is an upscale reflection of monochromatic colors with distinctive veining. Choose from five modern colors in either an 8"x24" or 12"x24" format with both matte and semi-polished finishes. Accent your residential or commercial space with a coordinating 2"x2" mosaic or 3-D Muretto accent.

COLORS

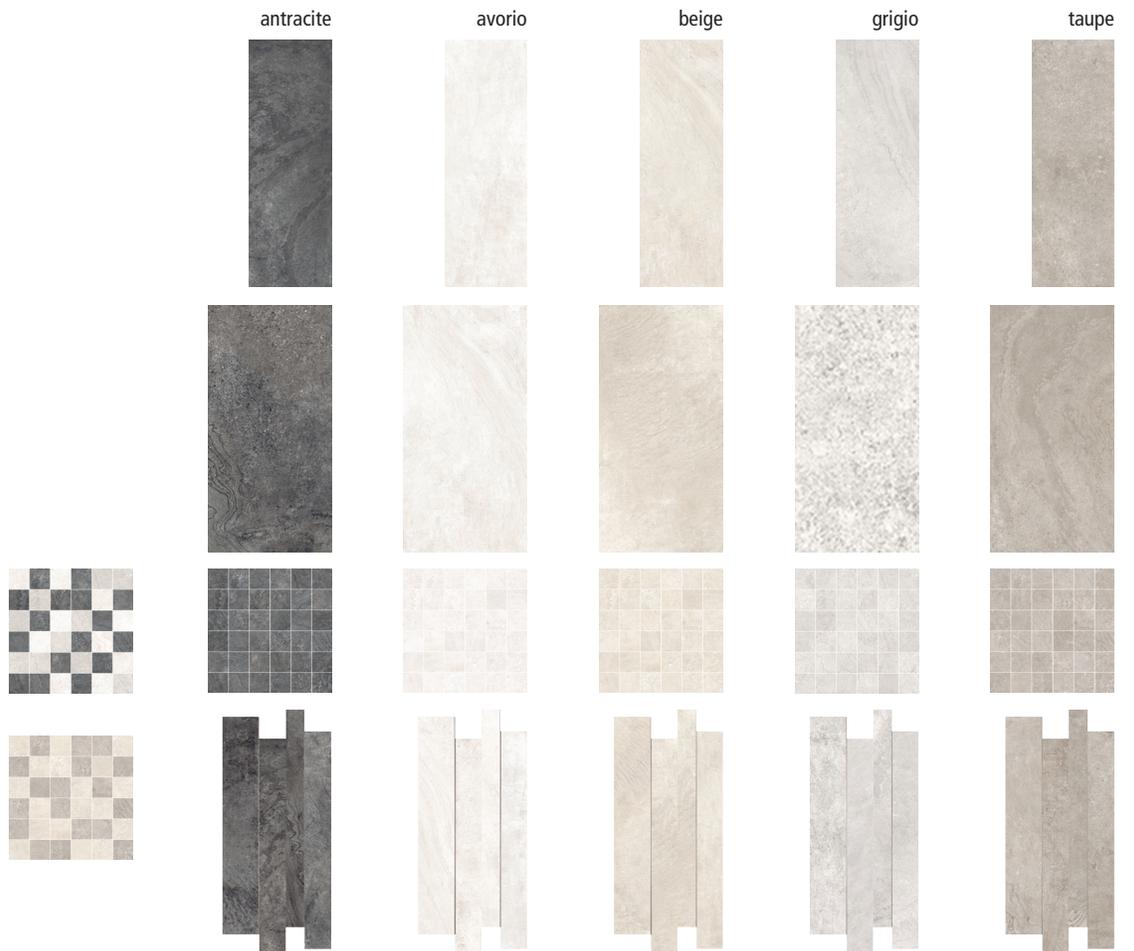

TECHNICAL INFORMATION

TILE SIZES

Nominal	Shape	Finish	Thickness
8 x 24 rectified		Lappato	10.2 mm
12 x 24 rectified		Lappato	10.2 mm
12 x 24		Matte	10.2 mm
2 x 2 Mosaic		Matte	10.2 mm
12 x 24 3-D Muretto Mosaic		Matte	10.2 mm

COORDINATING TRIM

Nominal	Shape	Finish	Thickness
2.75 x 24 Bullnose		Lappato	10.2 mm
2.75 x 24 Bullnose		Matte	10.2 mm

PERFORMANCE DATA

CHARACTERISTIC	NORMS	RESULTS
Water Absorption	ISO 10545-3	≤ 0.5%
Deep Abrasion	ISO 10545-6	<175
PEI Abrasion Resistance (Glazed)	ISO 10545-7	5
Breaking Strength	ISO 10545-4	> 35 N/mm ²
Dynamic Coefficient of Friction Wet	AcuTest	0.59 (Matte Only)
Dimensions Range	ISO 10545-2	Conforms
Frost Resistance	ISO 10545-12	Frost Proof
Chemical Resistance - Household Chemicals	ISO 10545-13	Min. GB
Thermal Shock Resistance	ISO 10545-9	Resistant
Resistance to Stains	ISO 10545-14	Min. Class 3
Crazing Resistance of Glazed Tiles	ISO 10545-11	Resistant

SHADE VARIATION



V3 - MODERATE VARIATION

While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece may vary significantly. For example "that little bit of color" on one piece of tile may be the primary color on the next piece.

WEAR CODE

5 - Rated for all residential and commercial applications.

APPLICATIONS

	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL
FLOORS	✘	✘	✘
WALLS / BACKSPLASH	✘	✘	✘
POOL DECKING	*		
EXTERNAL USE - FROST PROOF	*	*	

✘ - Has been approved for this application.

* - Information is available upon request.

NOTES

It is not recommended to stagger any tile longer than 18" more than 1/3 the length of the tile.

Always inspect materials prior to installation.

Always mix 2-3 cartons at a time while installing to insure the best blend.

All product images are representative only. Variation in color and shading is to be expected. Final selection should be made from actual tile samples.