






Tullia | Glazed Porcelain


AVAILABLE SIZES



DESCRIPTION





Tullia Italian porcelain brings the wood tile look to a new, exciting standard. Combining traditional American pine wood screens with vibrant colors such as blues, greens and greys, Tullia is a premier, high-quality porcelain tile perfect for today's room. Available in two rectangular tile formats: 3.5" x 14" and 6" x 36", plus 3.5" x 14" trim. Accent with a stunning 3" porcelain hexagon or basketweave mosaic.

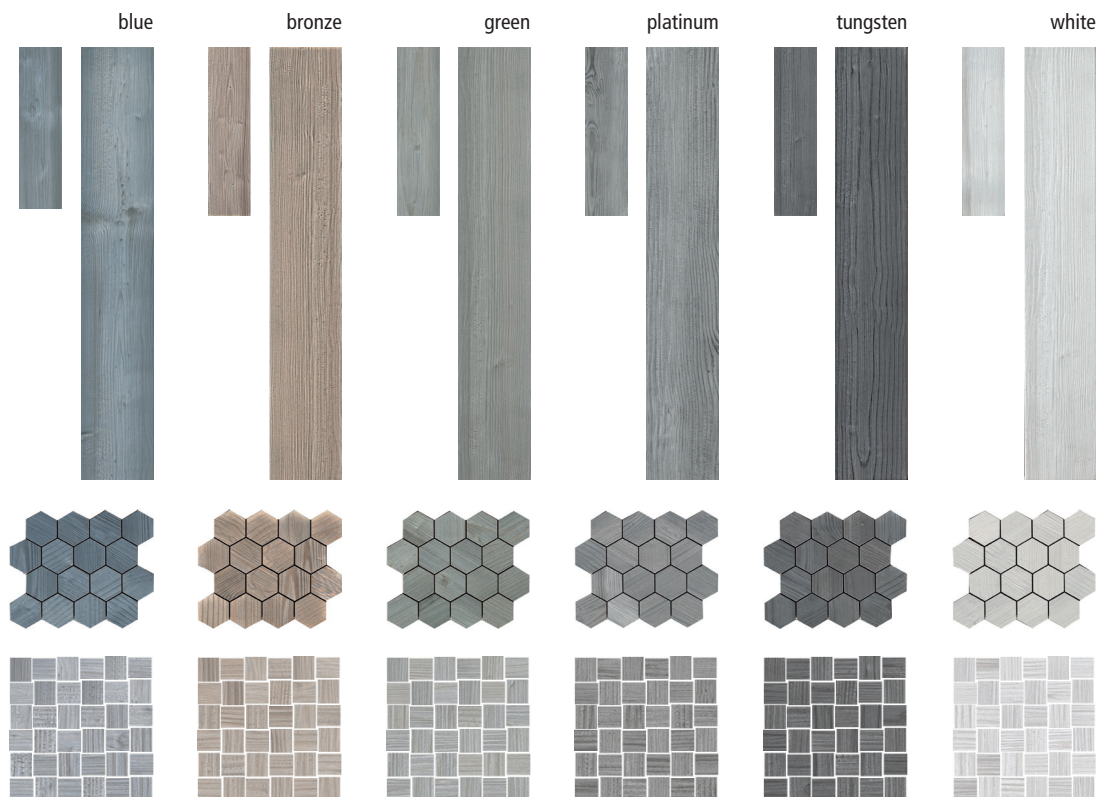COLORS




TECHNICAL INFORMATION

TILE SIZES

| Nominal | Shape | Finish | Thickness |
|--------------------------------|---|--------|-----------|
| 3.5 x 14 |  | Matte | 10 mm |
| 6 x 36 |  | Matte | 10 mm |
| Hexagon Mosaic |  | Matte | 10 mm |
| Basketweave "Intreccio" Mosaic |  | Matte | 10 mm |

COORDINATING TRIM

| Nominal | Shape | Finish | Thickness |
|-------------------|---|--------|-----------|
| 3.5 x 14 Bullnose |  | Matte | 10 mm |

PERFORMANCE DATA

| CHARACTERISTIC | NORMS | RESULTS |
|-------------------------------------|--------------|-------------|
| Water Absorption | ISO 10545-3 | 0.07 % |
| PEI Abrasion Resistance (Glazed) | ISO 10545-7 | 4 |
| Breaking Strength | ISO 10545-4 | 52 N/mm3 |
| Static Coefficient of Friction Wet | ASTM C1028 | 0.65 |
| Dynamic Coefficient of Friction Wet | AcuTest | 0.65 |
| Dimensions Range | ISO 10545-2 | Conforms |
| Frost Resistance | ISO 10545-12 | Frost Proof |
| Scratch Hardness | MOHS | 8 |
| Thermal Shock Resistance | ISO 10545-9 | Resists |
| Crazing Resistance of Glazed Tiles | ISO 10545-11 | Resists |

SHADE VARIATION



V2 - SLIGHT VARIATION
Clearly distinguishable differences in texture and/or pattern within similar colors.

WEAR CODE

4 - Rated for all residential and light commercial applications.

APPLICATIONS

| | RESIDENTIAL | LIGHT COMMERCIAL | COMMERCIAL |
|----------------------------|-------------|------------------|------------|
| FLOORS | ✗ | ✗ | |
| WALLS / BACKSPLASH | ✗ | ✗ | ✗ |
| POOL DECKING | * | | |
| EXTERNAL USE - FROST PROOF | * | | |

✗ - Has been approved for this application.
* - Information is available upon request.

NOTES

It is not recommended to stagger any tile longer than 18" more than 1/3 the length of the tile.

Minimum grout joint recommendation: 3/16"

Always inspect materials prior to installation.

Always mix 2-3 cartons at a time while installing to insure the best blend.

All product images are representative only. Variation in color and shading is to be expected. Final selection should be made from actual tile samples.