






Place | Porcelain



◆ **CÆSAR** ◆
CERAMICS USA




AVAILABLE SIZES

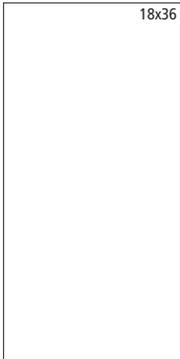

DESCRIPTION

Place is a technical porcelain designed in Italy but made in the USA. A series of slate tile looks, this series is truly American in its replication of slate and quartzite screens. An advanced synthesis of technical porcelain production and natural stone looks, suitable for both commercial and residential settings.

COLORS

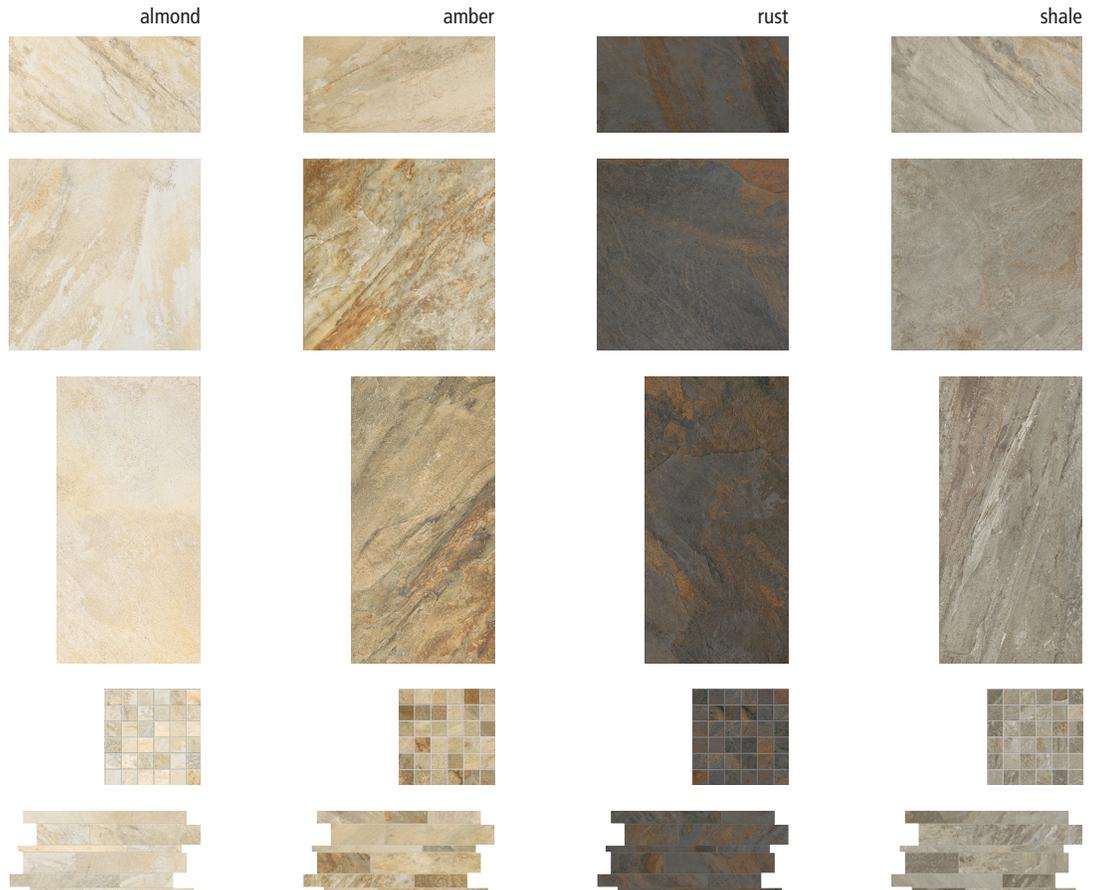

TECHNICAL INFORMATION

TILE SIZES

Nominal	Shape	Finish	Thickness
12 x 24		Matte	9 mm
24 x 24		Matte	9 mm
18 x 36		Matte	9 mm
2 x 2 Mosaic		Matte	9 mm
12 x 24 Brickmix Mosaic		Matte	9 mm

COORDINATING TRIM

Nominal	Shape	Finish	Thickness
3 x 24 Bullnose		Matte	9 mm
6 x 12 Cove Base		Matte	9 mm

PERFORMANCE DATA

CHARACTERISTIC	NORMS	RESULTS
Water Absorption	C373	≤ 0.5%
PEI Abrasion Resistance (Glazed)	C1027	NA
Breaking Strength	C648	≥400 lbs
Dynamic Coefficient of Friction Wet	AcuTest	0.42
Dimensions Range	C499	.5% (+/- 2 mm)
Facial Range of Thickness	C499	≤ 0.5% (+/- 2 mm)
Wedging	C502	0.5% (+/- 2 mm)
Frost Resistance	C1026	Frost Proof
Chemical Resistance	C650	Unaffected
Scratch Hardness	MOHS	6

SHADE VARIATION



V4 - RANDOM VARIATION

Random color differences from tile to tile, so that one tile may have totally different colors from that of other tiles. Thus the final installation will be unique.

WEAR CODE

5 - Rated for all residential and commercial applications.

APPLICATIONS

	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL
FLOORS	✘	✘	✘
WALLS / BACKSPLASH	✘	✘	✘
POOL DECKING	*	*	
EXTERNAL USE - FROST PROOF	*	*	

✘ - Has been approved for this application.

* - Information is available upon request.

NOTES

It is not recommended to stagger any tile longer than 18" more than 1/3 the length of the tile.

Grout Joint Recommendation: 1/8"

Always inspect materials prior to installation.

Always mix 2-3 cartons at a time while installing to insure the best blend.

All product images are representative only. Variation in color and shading is to be expected. Final selection should be made from actual tile samples.

