



Cheverly | Ceramic / Porcelain



AVAILABLE SIZES




2x10 Bullnose

DESCRIPTION



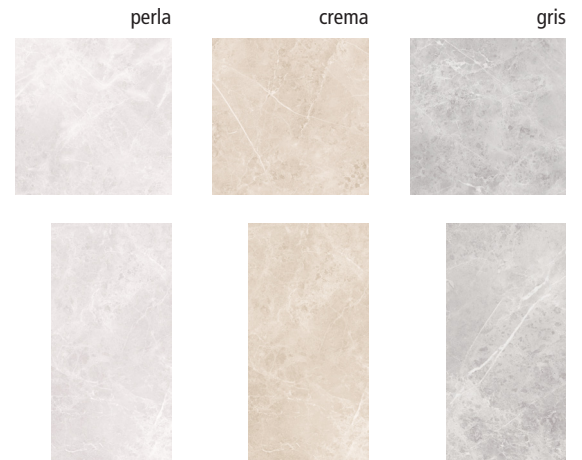

Cheverly is a Spanish porcelain floor tile with ceramic wall tile options in both glossy or matte finish. This elegant marble stone look comes in grey, ivory or beige tones. A porcelain and ceramic tile combination perfect for any setting, including bathrooms and showers.

COLORS





TECHNICAL INFORMATION

TILE SIZES

Nominal	Shape	Material	Thickness
13 x 13 Matte		Porcelain	9.5 mm
10 x 20 Glossy Wall		Ceramic	9.7 mm
10 x 20 Matte Wall		Ceramic	9.7 mm
2 x 2 Matte Mosaic		Porcelain	9.5 mm

COORDINATING TRIM

Nominal	Shape	Material	Thickness
2 x 10 Glossy Bullnose		Ceramic	9.7 mm
2 x 10 Matte Bullnose		Ceramic	9.7 mm

PERFORMANCE DATA

CHARACTERISTIC	NORMS	RESULTS (13x13 Only)
Water Absorption	ISO 10545-3	≤ 0.2 %
PEI Abrasion Resistance (Glazed)	ISO 10545-7	4
Breaking Strength	ISO 10545-4	49 N/mm2
Wet DCOF	AcuTest	0.45
Dimensions Range	ISO 10545-2	Conforms
Frost Resistance	ISO 10545-12	Frost Proof
Chemical Resistance - Household Chemicals	ISO 10545-13	GA/GLA/GHA
Chemical Resistance - Low Concentration of Acids and Bases	ISO 10545-13	GA/GLA/GHA
Scratch Hardness	MOHS	5
Resistance to Stains	ISO 10545-14	Class 5

SHADE VARIATION



V2 - SLIGHT VARIATION
Clearly distinguishable differences in texture and/or pattern within similar colors.

WEAR CODE

13x13 / 2x2 Mosaic: 4 - Rated for all residential and light commercial applications.
10x20 / 2x10 Bullnose: 1 - Rated for wall applications only.

APPLICATIONS

	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL
FLOORS	X	X	
WALLS / BACKSPLASH	X	X	X
POOL DECKING			
EXTERNAL USE - FROST PROOF			

X - Has been approved for this application.
* - Information is available upon request.

NOTES

It is not recommended to stagger any tile longer than 18" more than 1/3 the length of the tile.

Minimum Grout Joint Recommendation: 3/16"

Always inspect materials prior to installation.

Always mix 2-3 cartons at a time while installing to insure the best blend.

All product images are representative only. Variation in color and shading is to be expected. Final selection should be made from actual tile samples.