




Oxide 2.0 | Porcelain





AVAILABLE SIZES



DESCRIPTION





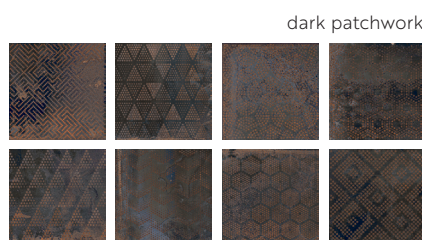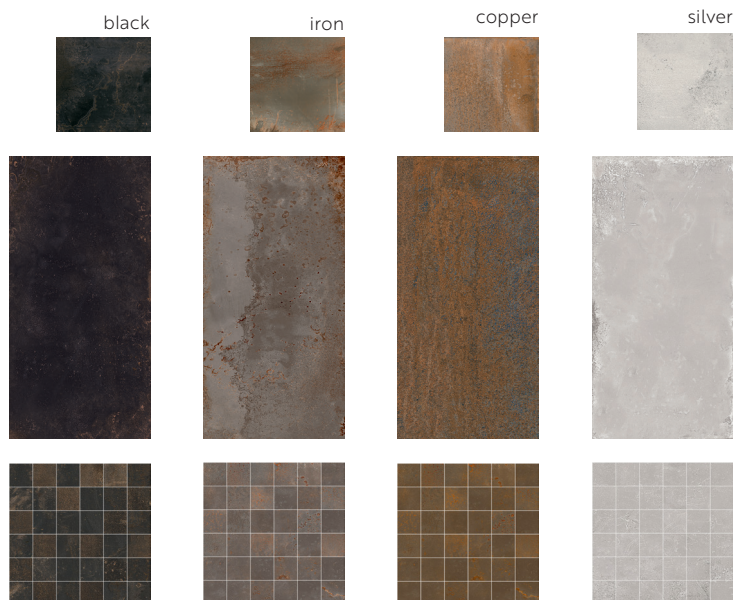


An exciting, modern and unique porcelain tile series that brings new vision to the metallic tile, cement tile and oxidized tile looks: Oxide 2.0 is a colorbody porcelain that achieves a rare artistic expression. Inspired by metallic transformation effects, this technical porcelain tile series rises to a level of story-telling. Truly a 'living' material that will transform any living space.

COLORS




TECHNICAL INFORMATION

TILE SIZES

Nominal	Shape	Finish	Thickness	Availability
8 x 8 Rectified		Matte	10 mm	✓
12 x 24 Rectified		Matte	10 mm	✓
24 x 24 Rectified		Matte	10 mm	⌚
24 x 48 Rectified		Matte	10 mm	⌚
48 x 48 Rectified		Matte	10 mm	⌚
2x2 Mosaic		Matte	10 mm	✓
Hexagon Mosaic		Matte	10 mm	✓

✓ Stock Item. ⌚ Non-Stock Item. Requires Extra Lead Time.

COORDINATING TRIM

Nominal	Shape	Finish	Thickness
2.875 x 24 Bullnose		Matte	10 mm

PERFORMANCE DATA

CHARACTERISTIC	NORMS	RESULTS
Water Absorption	ISO 10545-3	< 0.1%
Abrasion Resistance (Glazed)	ISO 10545-7	5
Breaking Strength	ISO 10545-4	> 45 N/mm2
Dynamic Coefficient of Friction Wet	AcuTest	0.5
Dimensions Range	ISO 10545-2	Conforms
Frost Resistance	ISO 10545-12	Frost Proof
Crazing Resistance of Glazed Tiles	ISO 10545-11	Resistant

SHADE VARIATION

8x8:



V4 - RANDOM VARIATION
Random color differences from tile to tile, so that one tile may have totally different colors from that of other tiles. Thus the final installation will be unique.

All Other Sizes:



V3 - MODERATE VARIATION
While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece may vary significantly. For example "that little bit of color" on one piece of tile may be the primary color on the next piece.

WEAR CODE

5 - Rated for all residential and commercial applications.

APPLICATIONS

	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL
FLOORS	✗	✗	✗
WALLS / BACKSPLASH	✗	✗	✗
POOL DECKING	*	*	
EXTERNAL USE - FROST PROOF	*	*	

✗ - Has been approved for this application.
* - Information is available upon request.

NOTES

It is not recommended to stagger any tile longer than 18" more than 1/3 the length of the tile.

Minimum Grout Joint Recommendation: 1/8"

Always inspect materials prior to installation.

Always mix 2-3 cartons at a time while installing to insure the best blend.

All product images are representative only. Variation in color and shading is to be expected. Final selection should be made from actual tile samples.