

Stonecrete | Porcelain




STONEPEAK
high tech porcelain




AVAILABLE SIZES



12x24



24x24

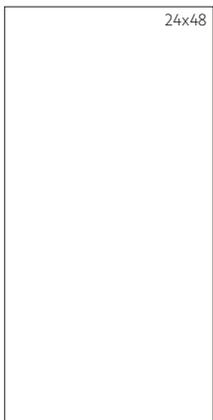

24x48



12x24
Design 6 Mosaic



Cube 3D
Mosaic
on 12x12
sheet



3x6 Parquet
Mosaic
on 12x12
sheet



3x24 Bullnose



6x12 Cove
Base

DESCRIPTION

Stonecrete is an American-made porcelain tile series offering a modern aged cement tile look. This color body porcelain tile series emphasizes subtle color blends to create a uniform look on either a honed tile or shiny tile finish. An extensive floor tile series with modern square tile and rectangle tile sizes, Stonecrete also comes with beautiful mosaic tile options to create unique designs for any residential or light commercial project.

COLORS



TECHNICAL INFORMATION

TILE SIZES

Nominal	Shape	Finish	Thickness
12 x 24 Rectified		Matte / Lappato	8 mm
24 x 24 Rectified		Matte / Lappato	8 mm
24 x 48 Rectified		Matte / Lappato	8 mm
12 x 12 Cube 3D		Matte	8 mm
3 x 6 Parquet Mosaic		Matte	8 mm
12 x 24 Design 6 Mosaic		Matte	8 mm

COORDINATING TRIM

Nominal	Shape	Finish	Thickness
3 x 24 Bullnose		Matte	8 mm
6 x 12 Cove Base		Matte	7.5 mm

PERFORMANCE DATA

CHARACTERISTIC	NORMS	RESULTS
Water Absorption	C373	≤ 0.1 %
PEI Abrasion Resistance (Glazed)	C1027	Class 4
Breaking Strength	C648	≥ 400 lbs
Bond Strength	C482	≥ 200 psi
Wet DCOF	AcuTest	≥ 0.55 (matte) ≥ 0.42 (lappato)
Thickness Dimension	C499	In Accordance
Facial Dimension	C499	In Accordance
Warpage Diagonal	C485	In Accordance
Wedging	C502	In Accordance
Frost Resistance	C1026	Frost Proof
Chemical Resistance	C650	Class A
Scratch Hardness	MOHS	7

RECYCLED CONTENT



Contains ≥ 40% Pre-Consumer Recycled Content.

SHADE VARIATION



V3 - MODERATE VARIATION

While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece may vary significantly. For example "that little bit of color" on one piece of tile may be the primary color on the next piece.

WEAR CODE

4 - Rated for all residential and light commercial applications.

APPLICATIONS

	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL
FLOORS	✘	✘	
WALLS / BACKSPLASH	✘	✘	
POOL DECKING	*	*	
EXTERNAL USE - FROST PROOF	*	*	

✘ - Has been approved for this application.
* - Information is available upon request.

NOTES

It is not recommended to stagger any tile longer than 18" more than 1/3 the length of the tile.

Minimum Grout Joint Recommendation: 1/8"

Always inspect materials prior to installation.

Always mix 2-3 cartons at a time while installing to insure the best blend.

All product images are representative only. Variation in color and shading is to be expected. Final selection should be made from actual tile samples.

