


# Temple Stones | Porcelain




## AVAILABLE SIZES

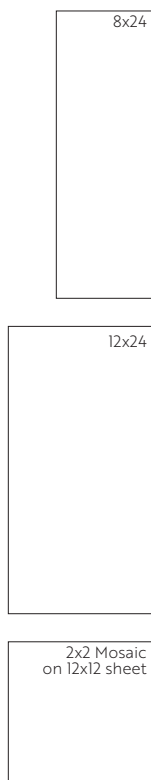

## DESCRIPTION





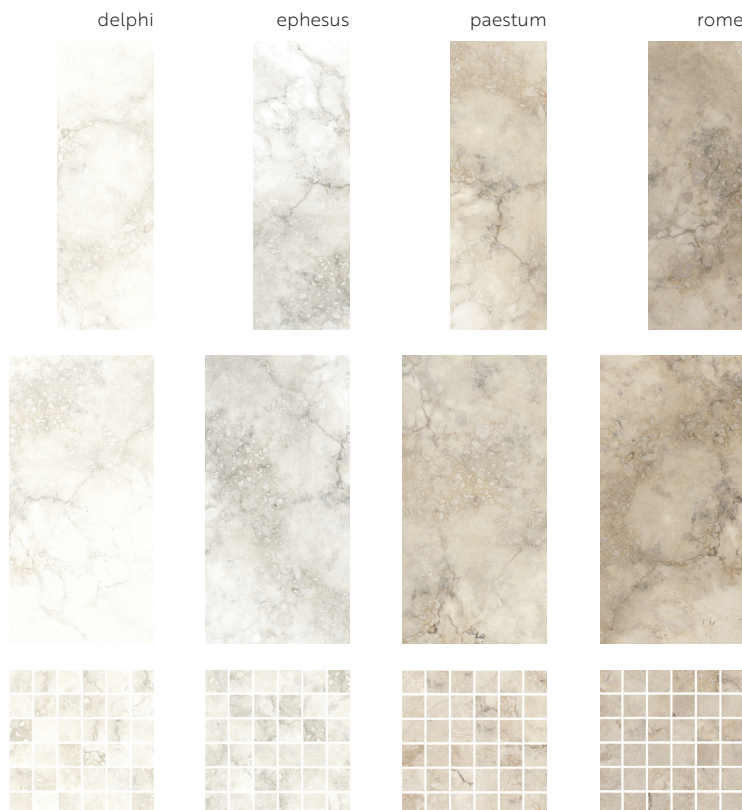


Temple Stones is an Italian porcelain tile series that offers the elegant, timeless look of Italian Travertine stone tiles. A line perfectly suited for sophisticated rooms, Temple Stones has multiple design options, from classic rectangular tile formats such as 12" x 24" to modern tile sizes such as 8" x 24". Available in both matte and polished finishes, this tile series is a truly unique achievement in stone look tiles, and can easily crossover between residential and commercial settings while offering broad design versatility.

## COLORS



# TECHNICAL INFORMATION

## TILE SIZES

Nominal	Shape	Finish	Thickness	Availability
8 x 24 Rectified		Matte	10 mm	✓
8 x 24 Rectified		Lappato	10 mm	✓
12 x 24 Rectified		Matte	10 mm	✓
12 x 24 Rectified		Lappato	10 mm	✓
24 x 24 Rectified		Matte	10 mm	⌚
24 x 24 Rectified		Lappato	10 mm	⌚
2 x 2 Mosaic		Matte	10 mm	✓

✓ Stock Item. ⌚ Non-Stock Item. Requires Extra Lead Time.

## PERFORMANCE DATA

CHARACTERISTIC	NORMS	RESULTS
Water Absorption	ISO 10545-3	≤ 0.05 %
Abrasion Resistance (Glazed)	ISO 10545-7	Rome = 4; Other Colors = 5
Breaking Strength	ISO 10545-4	≥ 35 N/mm2
Dynamic Coefficient of Friction Wet	AcuTest	≥ 0.42
Dimensions Range	ISO 10545-2	Conforms
Frost Resistance	ISO 10545-12	Frost Proof
Chemical Resistance - Household Chemicals	ISO 10545-13	Resistant
Chemical Resistance - Low Concentration of Acids	ISO 10545-13	Resistant
Thermal Shock Resistance	ISO 10545-9	Resistant
Crazing Resistance of Glazed Tiles	ISO 10545-11	Resistant

## RECYCLED CONTENT



Contains 10% Pre-Consumer Recycled Content.

## SHADE VARIATION



V3 - MODERATE VARIATION  
While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece may vary significantly. For example "that little bit of color" on one piece of tile may be the primary color on the next piece.

## WEAR CODE

Rome: 4 - Rated for all residential and light commercial applications.  
All Others: 5 - Rated for all residential and commercial applications.

## APPLICATIONS

	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL
FLOORS	✗	✗	✗ (all except Rome)
WALLS / BACKSPLASH	✗	✗	✗
POOL DECKING	*	*	
EXTERNAL USE - FROST PROOF	*	*	

✗ - Has been approved for this application.  
\* - Information is available upon request.

## NOTES

It is not recommended to stagger any tile longer than 18" more than 1/3 the length of the tile.

Minimum Grout Joint Recommendation: 1/8"

Always inspect materials prior to installation.

Always mix 2-3 cartons at a time while installing to insure the best blend.

All product images are representative only. Variation in color and shading is to be expected. Final selection should be made from actual tile samples.