


# Tiburon | Ceramic / Porcelain




## AVAILABLE SIZES

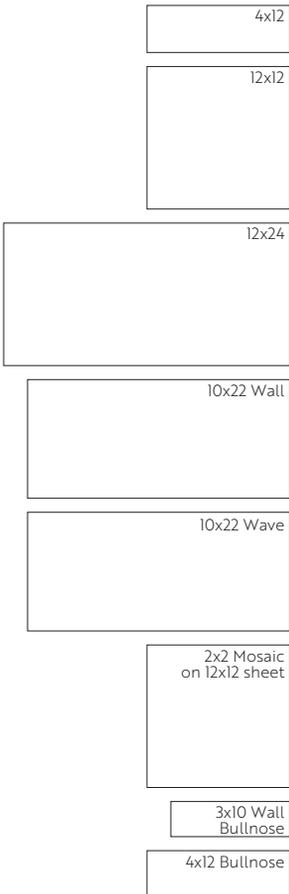

## DESCRIPTION

Tiburon is an elegant porcelain floor and ceramic wall tile series with a vein-cut travertine stone look. Four simple, muted colors are offered in multiple tile formats, including decorative tiles and mosaics. Tiburon is perfect for residential spaces and surfaces, such as kitchens, bathrooms, backsplashes and large living spaces.

## COLORS

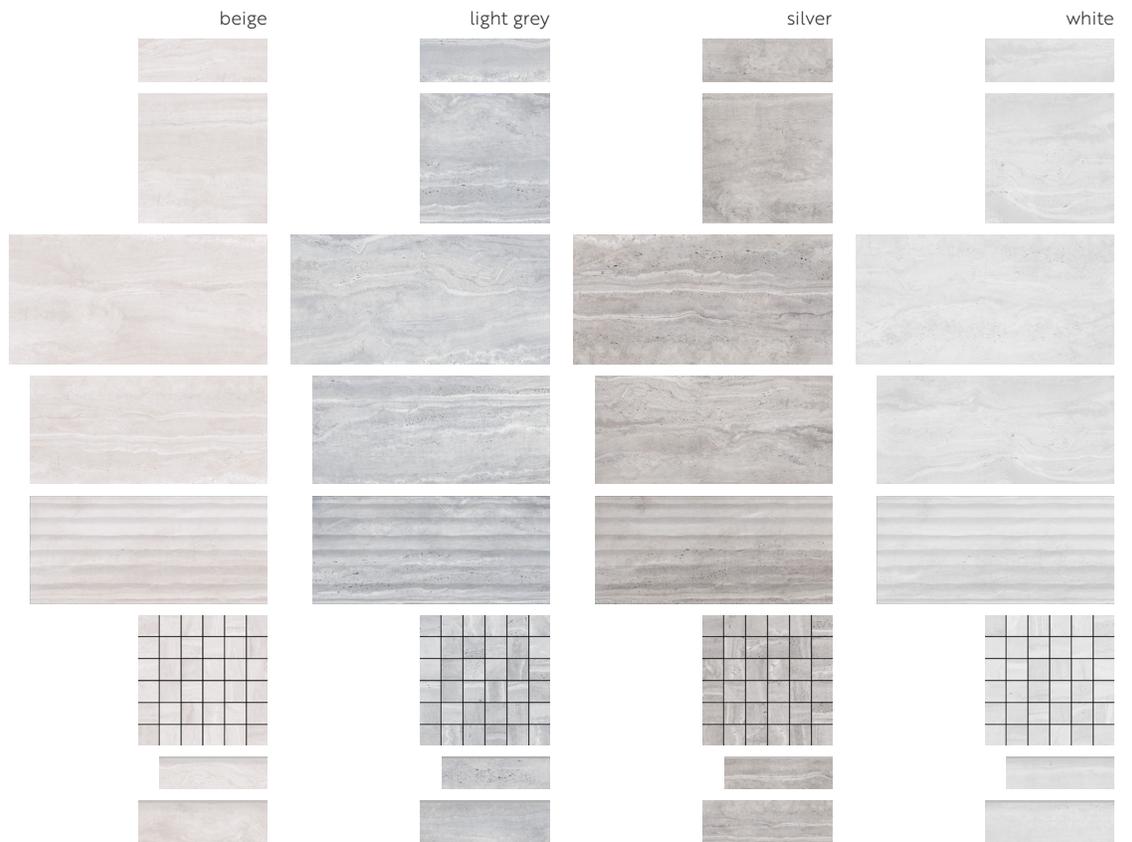

# TECHNICAL INFORMATION

## TILE SIZES

Nominal	Shape	Material	Thickness
4 x 12		Porcelain	8 mm
12 x 12		Porcelain	8 mm
12 x 24		Porcelain	8 mm
10 x 22 Glossy Wall		Ceramic	8 mm
10 x 22 Glossy Wave		Ceramic	8 mm
2x2 Mosaic		Porcelain	8 mm

## COORDINATING TRIM

Nominal	Shape	Material	Thickness
3 x 10 Glossy Wall Bullnose		Ceramic	8 mm
4 x 12 Bullnose		Porcelain	8 mm

## PERFORMANCE DATA

CHARACTERISTIC	NORMS	RESULTS
Water Absorption	C373	≤ 0.5 %
PEI Abrasion Resistance (Glazed)	C1027	Silver = 4; Others = 5
Breaking Strength	C648	≥ 140 kN
Bond Strength	C482	≥ 50 psi
Dynamic Coefficient of Friction Wet	AcuTest	≥ 0.42
Thickness Dimension	C499	In Accordance
Facial Dimension	C499	In Accordance
Warpage Diagonal	C485	In Accordance
Wedging	C502	In Accordance
Frost Resistance	C1026	Frost Proof
Chemical Resistance	C650	GL: GA, GLA

## SHADE VARIATION



V2 - SLIGHT VARIATION  
Clearly distinguishable differences in texture and/or pattern within similar colors.

## WEAR CODE

10x22 / Bullnose: 1 - Rated for wall applications only  
Silver: 4 - Rated for all residential and light commercial applications.  
All Others: 5 - Rated for all residential and commercial applications.

## APPLICATIONS

	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL
FLOORS	X	X	
WALLS / BACKSPLASH	X	X	X
POOL DECKING			
EXTERNAL USE - FROST PROOF	*	*	

X - Has been approved for this application.  
\* - Information is available upon request.

## NOTES

It is not recommended to stagger any tile longer than 18" more than 1/3 the length of the tile.

Minimum Grout Joint Recommendation: 3/16"

Always inspect materials prior to installation.

Always mix 2-3 cartons at a time while installing to insure the best blend.

All product images are representative only. Variation in color and shading is to be expected. Final selection should be made from actual tile samples.