







Urban 2.0 | Porcelain

STONEPEAK
high tech porcelain




AVAILABLE SIZES

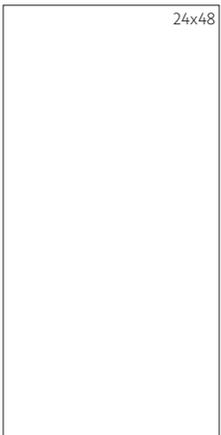

DESCRIPTION

Urban 2.0 is an American-made porcelain tile series offering a quartzite stone look perfect for any modern space. This color body porcelain tile series emphasizes a restrained quartz stone look with consistent color range and unique stone vein movement. An extensive floor tile series that also comes with beautiful mosaic tile options to create unique designs for any residential or light commercial project.

COLORS

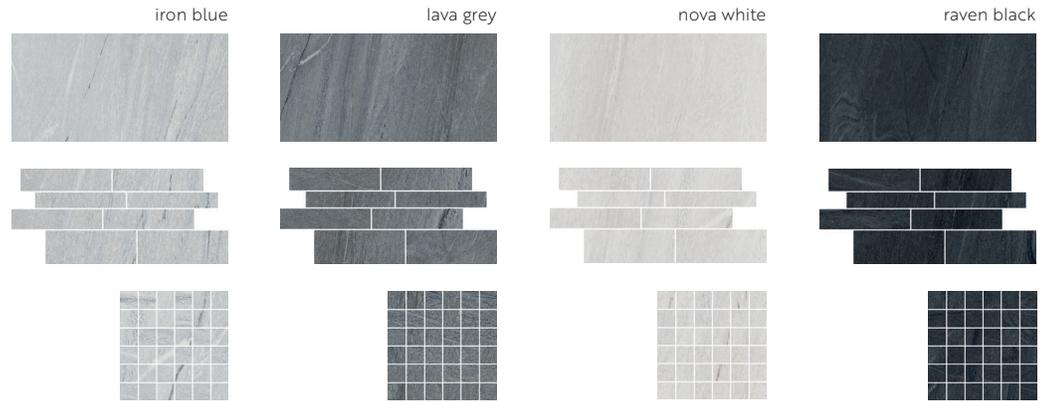

TECHNICAL INFORMATION

TILE SIZES

Nominal	Shape	Finish	Thickness
12 x 24 Rectified		Matte	8 mm
24 x 24 Rectified		Matte	8 mm
24 x 48 Rectified		Matte	8 mm
2 x 2 Mosaic		Matte	8 mm
12 x 24 Design 6 Mosaic		Matte	8 mm

COORDINATING TRIM

Nominal	Shape	Finish	Thickness
3 x 24 Bullnose		Matte	8 mm
6 x 12 Cove Base		Matte	7.5 mm

PERFORMANCE DATA

CHARACTERISTIC	NORMS	RESULTS
Water Absorption	C373	≤ 0.2 %
Abrasion Resistance (Glazed)	CI027	Class 4
Breaking Strength	C648	≥ 400 lbs
Bond Strength	C482	≥ 200 psi
Wet DCOF	AcuTest	≥ 0.42
Dimensions Range	C499	In Accordance
Facial Range of Thickness	C499	In Accordance
Warpage Diagonal	C485	In Accordance
Wedging	C502	In Accordance
Frost Resistance	CI026	Frost Proof
Chemical Resistance	C650	Class A
Scratch Hardness	MOHS	7

RECYCLED CONTENT



Contains ≥ 40% Pre-Consumer Recycled Content.

SHADE VARIATION



V3 - MODERATE VARIATION

While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece may vary significantly. For example "that little bit of color" on one piece of tile may be the primary color on the next piece.

WEAR CODE

4 - Rated for all residential and light commercial applications.

APPLICATIONS

	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL
FLOORS	X	X	
WALLS / BACKSPLASH	X	X	
POOL DECKING	*	*	
EXTERNAL USE - FROST PROOF	*	*	

X - Has been approved for this application.
* - Information is available upon request.

NOTES

It is not recommended to stagger any tile longer than 18" more than 1/3 the length of the tile.

Minimum Grout Joint Recommendation: 1/8"

Always inspect materials prior to installation.

Always mix 2-3 cartons at a time while installing to insure the best blend.

All product images are representative only. Variation in color and shading is to be expected. Final selection should be made from actual tile samples.

