



Inner | Porcelain




AVAILABLE SIZES

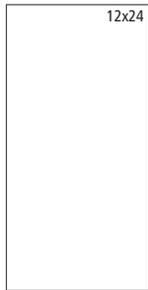

DESCRIPTION

This Italian porcelain tile represents the newest standard in high-quality technology. An artistic fusion of quartzite stone and metal, Inner incorporates a unique metal-like finish into the tile that produces reflective stone veining. A modern tile elevated to a new design appeal, this technical porcelain is available in 12" x 24" or larger tile formats, along with a 2" x 2" mosaic tile pattern.

COLORS

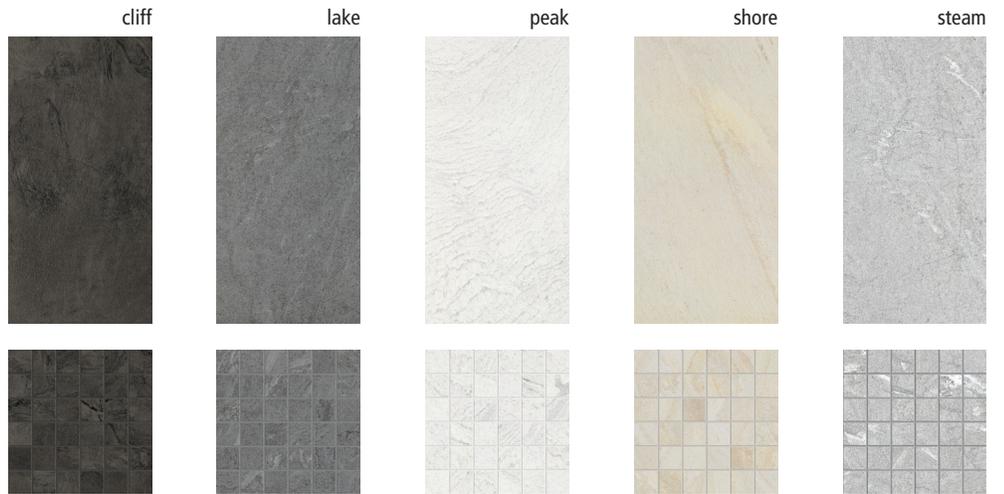

TECHNICAL INFORMATION

TILE SIZES

Nominal	Shape	Finish	Thickness
12 x 24		Matte	10 mm
2 x 2 Mosaic		Matte	10 mm

COORDINATING TRIM

Nominal	Shape	Finish	Thickness
3 x 24 Bullnose		Matte	10 mm

PERFORMANCE DATA

CHARACTERISTIC	NORMS	RESULTS
Water Absorption	ISO 10545-3	0.05%
Deep Abrasion	ISO 10545-6	≤ 145 mm ³
PEI Abrasion Resistance (Glazed)	ISO 10545-7	NA
Breaking Strength	ISO 10545-4	≥ 47 N/mm ²
Dynamic Coefficient of Friction Wet	AcuTest	0.62
Dimensions Range	ISO 10545-2	Conforms
Frost Resistance	ISO 10545-12	Frost Proof
Chemical Resistance - Household Chemicals	ISO 10545-13	Resistant
Chemical Resistance - Low Concentration of Acids and Bases	ISO 10545-13	Resistant
Thermal Shock Resistance	ISO 10545-9	Resistant
Resistance to Stains	ISO 10545-14	Cleanable

SHADE VARIATION



V2 - SLIGHT VARIATION
Clearly distinguishable differences in texture and/or pattern within similar colors.

WEAR CODE

5 - Rated for all residential and commercial applications.

APPLICATIONS

	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL
FLOORS	✘	✘	✘
WALLS / BACKSPLASH	✘	✘	✘
POOL DECKING	*	*	*
EXTERNAL USE - FROST PROOF	*	*	*

✘ - Has been approved for this application.
* - Information is available upon request.

NOTES

It is not recommended to stagger any tile longer than 18" more than 1/3 the length of the tile.

Grout joint recommendation: 1/8"

Always inspect materials prior to installation.

Always mix 2-3 cartons at a time while installing to insure the best blend.

All product images are representative only. Variation in color and shading is to be expected. Final selection should be made from actual tile samples.