

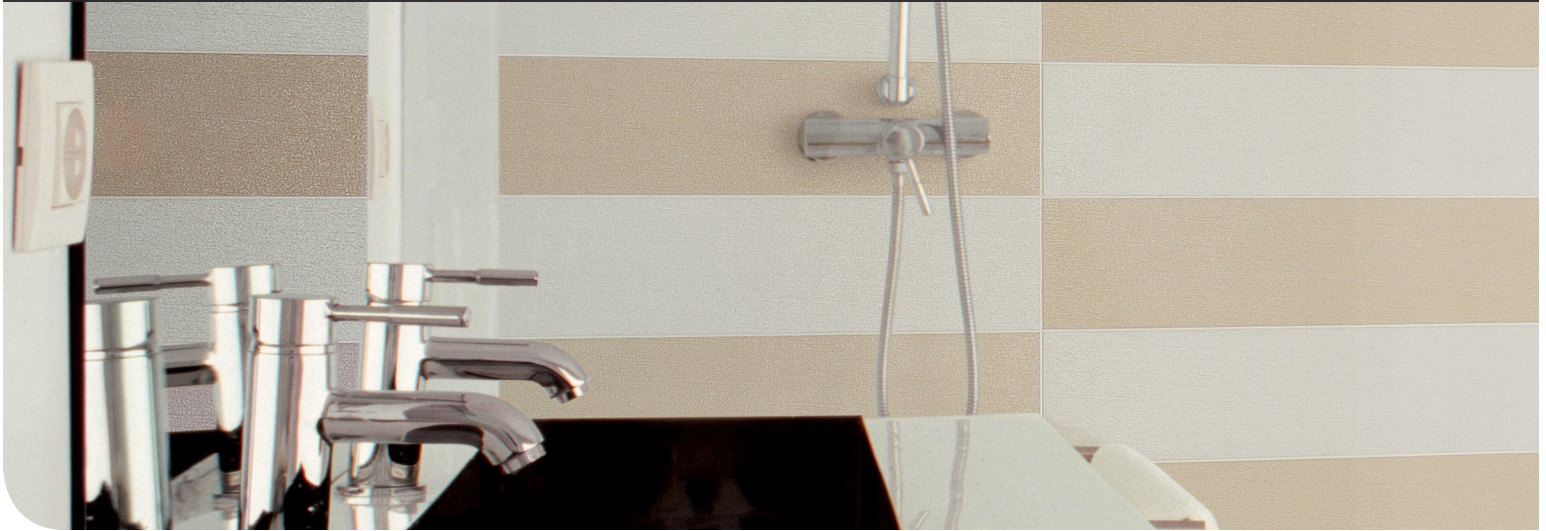


**Glam | Porcelain**



**AVAILABLE SIZES**



**DESCRIPTION**





Cutting edge Italian design and shades. A subtle play of light. Luxury. Elegance. Refinement.

**COLORS**




# TECHNICAL INFORMATION

## TILE SIZES

Nominal	Shape	Finish	Thickness
12 x 24		Matte	10 mm
12 x 24 Flower		Matte	10 mm
3 x 3 Mosaic		Matte	10 mm
24 x 24		Matte	10 mm

## COORDINATING TRIM

Nominal	Shape	Finish	Thickness
3 x 24 Bullnose		Honed	10 mm

## PERFORMANCE DATA

CHARACTERISTIC	NORMS	RESULTS
Water Absorption	ISO 10545-3	0.05%
PEI Abrasion Resistance (Glazed)	ISO 10545-7	5
Breaking Strength	ISO 10545-4	≥ 47 N/mm <sup>2</sup>
Static Coefficient of Friction Wet	C1028	≥ 0.60
Dimensions Range	ISO 10545-2	Conforms
Frost Resistance	ISO 10545-12	Frost Proof
Chemical Resistance - Household Chemicals	ISO 10545-13	Resistant
Thermal Shock Resistance	ISO 10545-9	Resistant
Resistance to Stains	ISO 10545-14	Cleanable

## RECYCLED CONTENT



Coffee and Gala each contain 20% Pre-Consumer Recycled Content.

## SHADE VARIATION



V2 - SLIGHT VARIATION  
Clearly distinguishable differences in texture and/or pattern within similar colors.

## WEAR CODE

5 - Rated for all residential and commercial applications.

## APPLICATIONS

	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL
FLOORS	✘	✘	✘
WALLS / BACKSPLASH	✘	✘	✘
POOL DECKING	*	*	*
EXTERNAL USE - FROST PROOF	✘	*	*

✘ - Has been approved for this application.

\* - Information is available upon request.

## NOTES

It is not recommended to stagger any tile longer than 18" more than 1/3 the length of the tile.

Always inspect materials prior to installation.

Always mix 2-3 cartons at a time while installing to insure the best blend.