


Zebrino | Glazed Porcelain




AVAILABLE SIZES

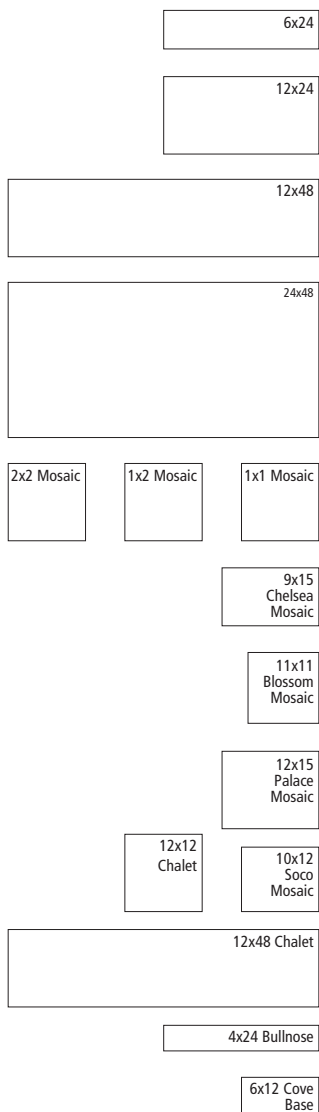

DESCRIPTION







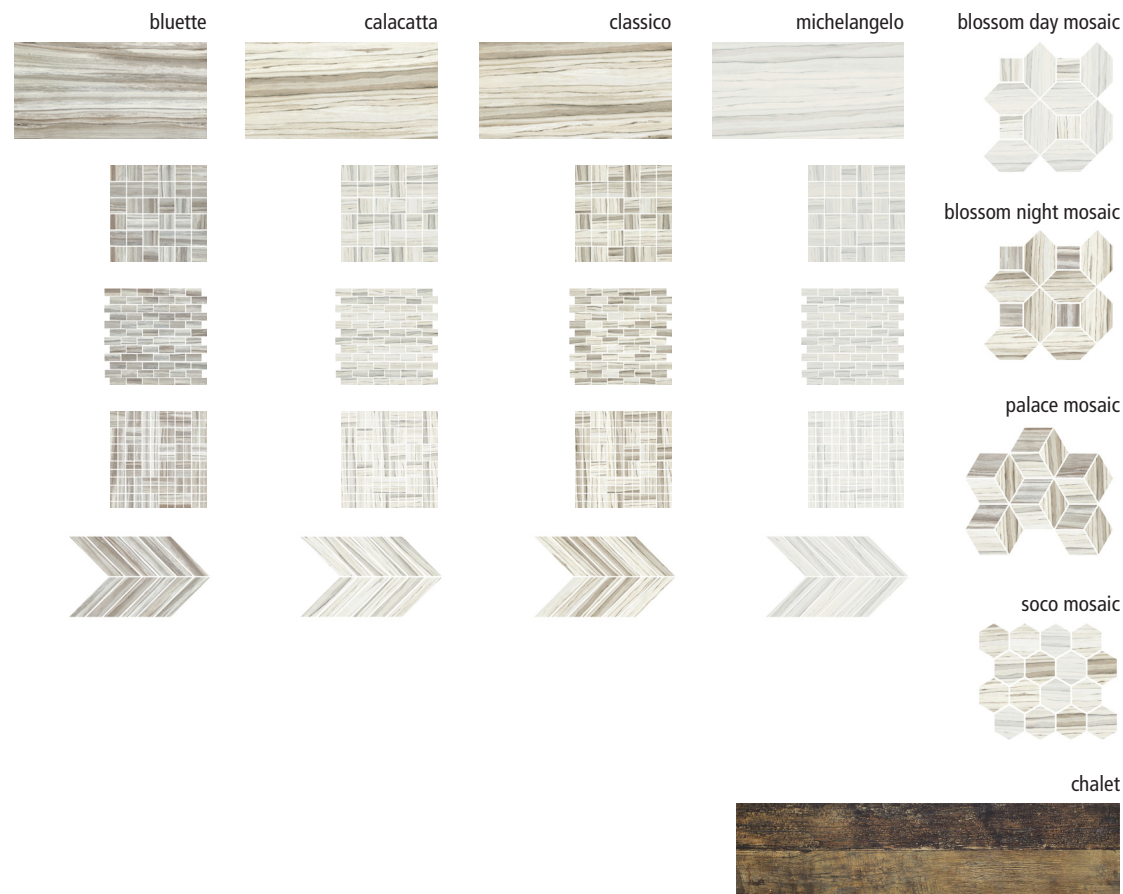






Zebrino by Stonepeak is an Italian designed porcelain made in the United States. Emulating the movement of Italian marble from the Apuan Alps, Zebrino is unique for its dramatic linear veining. Available in four colors and four sizes, the line can be accented with either a 2" x 2" mosaic, a selection of beautiful water-jet cut mosaic patterns, or a contrasting 12" x 48" wood-plank decorative. This novel marble look brings a new, refreshing take on the white marble trend - and offers an interesting and design-oriented selection of mosaics.

COLORS





TECHNICAL INFORMATION

TILE SIZES

Nominal	Shape	Finish	Thickness
12 x 24		Matte	8 mm
6 x 24		Matte	8 mm
12 x 48		Matte	8 mm
24 x 48		Matte	8 mm
2 x 2 mosaic on 12 x 12 sheet		Matte	8 mm
1 x 2 mosaic on 12 x 12 sheet		Matte	8 mm
1 x 1 mosaic on 12 x 12 sheet		Matte	8 mm
9 x 15 chelsea mosaic		Matte	8 mm
11 x 11 blossom mosaic		Matte	8 mm
12 x 15 palace mosaic		Matte	8 mm
10 x 12 soco mosaic		Matte	8 mm
12 x 12 chalet		Matte	8 mm
12 x 48 chalet		Matte	8 mm

COORDINATING TRIM

Nominal	Shape	Finish	Thickness
4 x 24 Bullnose		Matte	8 mm
6 x 12 Cove Base		Matte	8 mm

PERFORMANCE DATA

CHARACTERISTIC	NORMS	RESULTS
Water Absorption	C373	≤ 0.1%
Deep Abrasion	C1243	< 150 mm3
PEI Abrasion Resistance (Glazed)	C1027	5
Breaking Strength	C648	> 350 lbf
Dynamic Coefficient of Friction Wet	AcuTest	≥ 0.66
Static Coefficient of Friction Wet	C1028	≥ 0.60
Warpage (Diagonal)	C485	≤ 0.40 %
Wedging	C502	≤ 0.25%
Frost Resistance	C1026	No Evidence of Damage
Chemical Resistance	C650	Unaffected
Scratch Hardness	MOHS	7

RECYCLED CONTENT



Contains 65% Pre-Consumer Recycled Content.
6% of the Materials and Resources is Post-Consumer Recycled Glass.

SHADE VARIATION



V2 - SLIGHT VARIATION
Clearly distinguishable differences in texture and/or pattern within similar colors.

WEAR CODE

5 - Rated for all residential and commercial applications.

APPLICATIONS

	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL
FLOORS	✗	✗	✗
WALLS / BACKSPLASH	✗	✗	✗
POOL DECKING	*		
EXTERNAL USE - FROST PROOF	*	*	

✗ - Has been approved for this application.
* - Information is available upon request.

NOTES

It is not recommended to stagger any tile longer than 18" more than 1/3 the length of the tile.

Always inspect materials prior to installation.

Always mix 2-3 cartons at a time while installing to insure the best blend.

All product images are representative only. Variation in color and shading is to be expected. Final selection should be made from actual tile samples.

