# Marble Look GLAZED PORCELAIN


# BEST TILE / BESTTILE.COM Minas



# BLACK



# PEARL

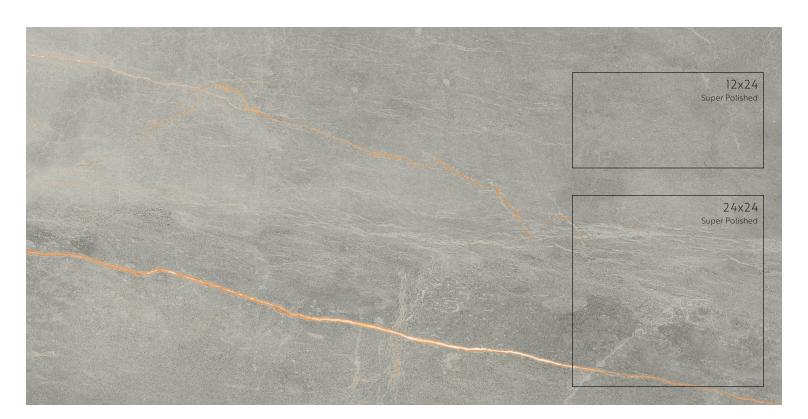

VARIATION



VARIATION





GLAZED PORCELAIN





Floor // MINAS BLACK 24X24 Wall // MINAS BLACK 12X24

## COLORS, SIZES & AVAILABILITY

			\ <del>\</del>	굺		
NOMINAL SIZE	FINISH	THICKNESS	GROUT JOINT	BLAC	PEA	
12 x 24 Rectified	Super Polished	10.5 mm	1/8″	✓	✓	
24 x 24 Rectified	Super Polished	10.5 mm	1/8"	✓	✓	
24 x 48 Rectified	Super Polished	10.5 mm	1/8"	ರ	ರ	
48 x 48 Rectified	Super Polished	10.5 mm	1/8"	ŭ	ರ	

Stock Item. U Non-Stock Item. Requires Extra Lead Time

### TECH INFO

R = Residential, LC = Light Commercial, C = Commercia

ORIGIN: Spain	RECOMMENDED APPLICATIONS	R	LC	С
SHADE VARIATION: V3 - Moderate Variation	51.0.005	_		
WEAR RATING: Black: 2 - Walls + Light Residential Floors; Pearl: 3 -	FLOORS	•		
Walls + Residential Floors	WALLS / BACKSPLASH		•	
It is not recommended to stagger any tile longer than 15" more than 1/3 the length of the tile.	POOL DECKING			
,⊚	EXTERNAL USE - FROST PROOF			

Approved for this application. \* Discuss proper installation method with your Sales Representative

### TILE PERFORMANCE DATA

TECHNICAL FEATURE	NORMS	RESULTS	
Water Absorption	ISO 10545-3	≤ 0.5%	
Abrasion Resistance (Glazed)	ISO 10545-7	2/3	
Breaking Strength	ISO 10545-4	35-45 N/mm2	
Dynamic Coefficient of Friction Wet	AcuTest	0.21	
Dimensions Range	ISO 10545-2	Conforms	
Frost Resistance	ISO 10545-12	Frost Proof	
Chemical Resistance - Household Chemicals	ISO 10545-13	А	
Chemical Resistance - Low Concentration of Acids and Bases	ISO 10545-13	GLB	
Resistance to Stains	ISO 10545-14	Class 5	
Resistance to Stains	ISO 10545-11	Resists	

